





QTM-eLED+0-10V

Installation Instructions

Housing

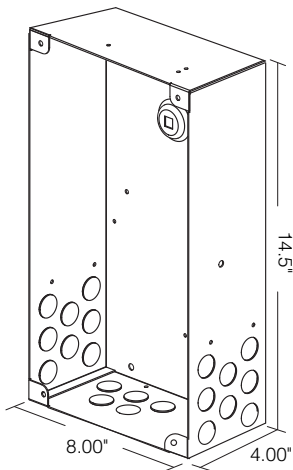


ISOMETRIC VIEW

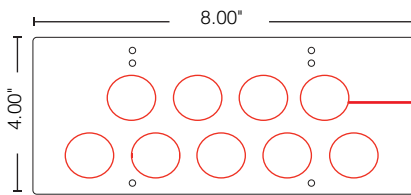



BOTTOM VIEW

0.875" KNOCKOUT 9X
(FOR 1/2" FITTINGS)

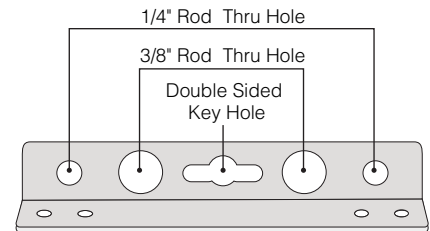

NOTE: Bracket can also be mounted (Top & Bottom)
for Vertical Mounts.

Mounting Options

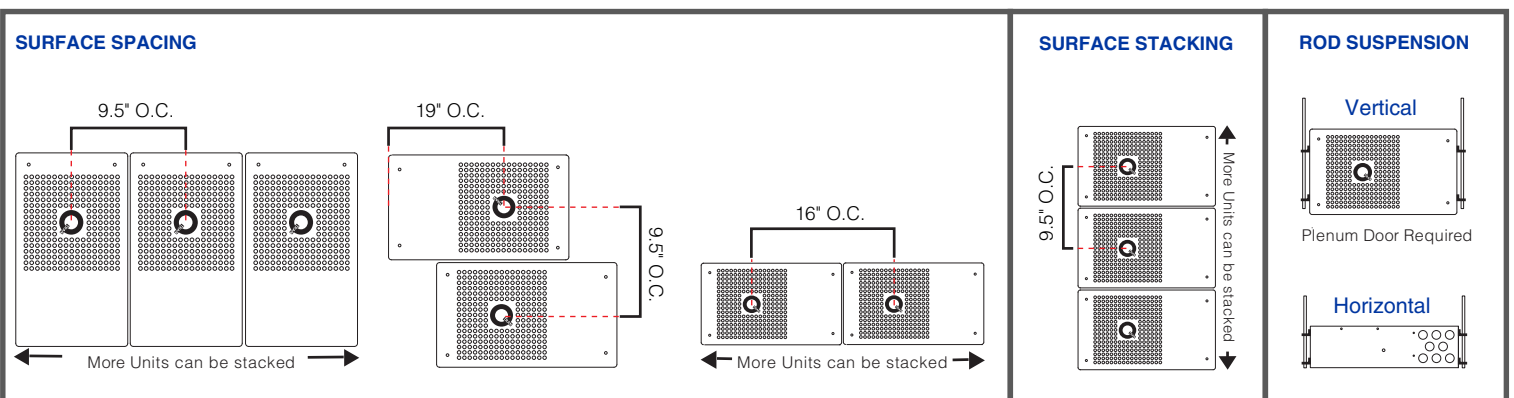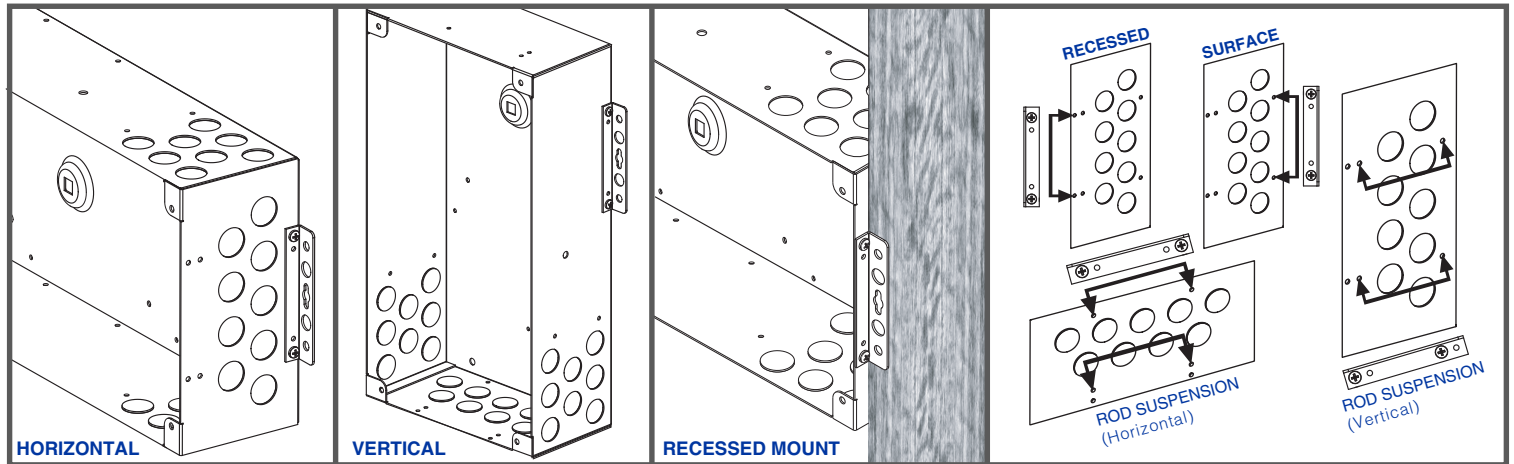


NOTE: Rods not included.



QTM-eLED+0-10V

Installation Instructions

Driver with Dimming Module

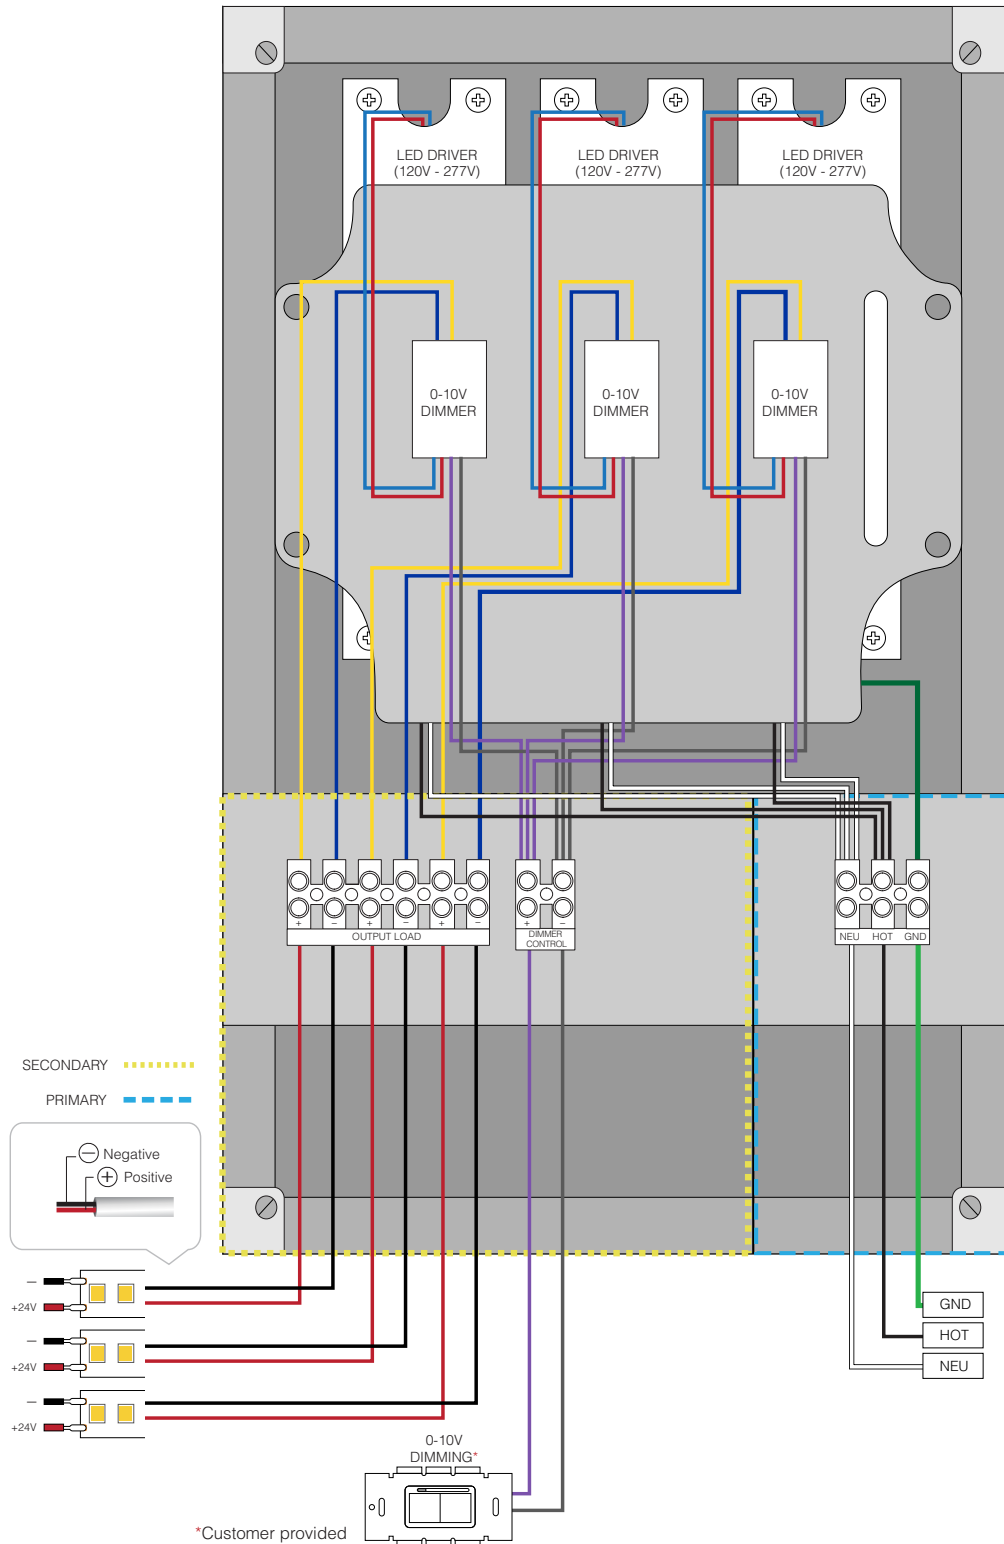



QTM-eLED+0-10V

Installation Instructions

CSA Requirements

- Suitable for Indoor use
- This power supply must be installed according to the National Electric Code and local codes and ordinances and in accordance with applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear rubber shoes and work on a sturdy wooden or fiberglass ladder.
- This power supply is to be installed in a location where it is not likely to be contacted by non-electricians.
- To avoid a hazard to children, account for all parts and destroy all packaging materials.

QTM-eLED		INPUT VOLTAGE		OUTPUT VOLTAGE		CONTROL TYPE	
		<input type="radio"/> 120V - 277V	<input type="radio"/> 12V	<input type="radio"/> 24V	<input type="radio"/> 0-10V		
	Model	Input Voltage (V)	Input Current (A)	Frequency	Nominal Output Voltage (VDC)	Nominal Output Wattage (W)	<input type="radio"/> DMX
<input type="radio"/> <input type="radio"/> <input type="radio"/>	QTM-eLED-60	120/277	0.60/0.29	50/60	12	60	<input type="radio"/> WD
	QTM-eLED-120	120/277	1.20/0.58	50/60	12	120	<input type="radio"/> TW
	QTM-eLED-180	120/277	1.80/0.87	50/60	12	180	<input type="radio"/> IA
<input type="radio"/> <input type="radio"/> <input type="radio"/>	QTM-eLED-100	120/277	0.95/0.40	50/60	24	100	<input type="radio"/> DALI-DT6
	QTM-eLED-200	120/277	1.90/0.80	50/60	24	200	<input type="radio"/> DALI-DT8
	QTM-eLED-300	120/277	2.85/1.20	50/60	24	300	<input type="radio"/> ND


- Type IC recessed, inherently protected
TYPE IC ENCASTRE, PROTECTION INHÉRENTE
- For supply connections use wire rated for at least 60°C
LES FILS D'ALIMENTATION 60°C MIN.
- Dimmer, if used, must be electronic low-voltage dimmer
LE GRADATEUR, LE CAS ÉCHÉANT, DOIT ÊTRE UN GRADATEUR ÉLECTRONIQUE BASSE TENSION
- Suitable for damp locations
CONVIENT AUX EMPLACEMENTS HUMIDES
- Wall mount only
MONTAGE MURAL UNIQUEMENT
- 50/60 Cycle
CYCLE 50/60
- Class 2
CLASSE 2

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CAUTION:
FOR 12VDC OUTPUT VOLTAGE, DO NOT CONNECT MORE THAN ONE LUMINAIRE HEAD ASSEMBLIES OF 60 W MAXIMUM EACH TO ANY ONE OUTPUT. FOR 24VDC OUTPUT VOLTAGE, DO NOT CONNECT MORE THAN ONE LUMINAIRE HEAD ASSEMBLIES OF 100 W MAXIMUM EACH TO ANY ONE OUTPUT.

POUR UNE TENSION DE SORTIE DE 12 V CC, NE CONNECTEZ PAS PLUS D'UN ENSEMBLE DE TÊTES DE LUMINAIRE DE 60 W MAXIMUM CHACUN À UNE SORTIE. POUR UNE TENSION DE SORTIE DE 24 V CC, NE CONNECTEZ PAS PLUS D'UN ENSEMBLE DE TÊTES DE LUMINAIRE DE 100 W MAXIMUM CHACUN À UNE SORTIE.



QTL
MILFORD, CT U.S.A.
(203) 367-8777
www.QTLlighting

LOW VOLTAGE
LIGHTING SYSTEM

CLASS: 3425 - 15
3425 - 95

