
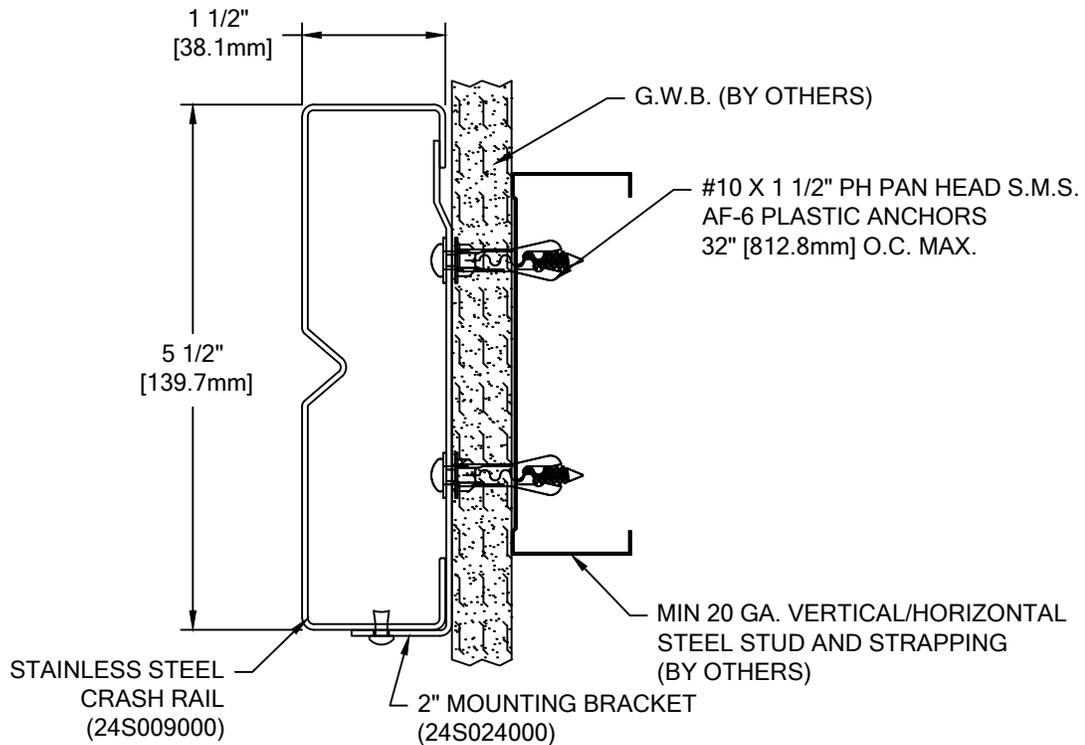


RAIL: GROOVED RAIL 10'-0" LONG (24S009000)	2" MOUNTING BRACKET (24S024000)	4" MOUNTING BRACKET (24S025000)	POP RIVETS: 1/8" X 5/8" STAINLESS STEEL (90H966002)	WALL MOUNT HARDWARE: #10 X 1-1/2" PHILLIPS PAN HD SMS (90H969002) AF-6 PLASTIC ANCHOR (90H453004) #6 PHILLIPS PAN HEAD BUGLE HEAD TEK SCREW (90H079002)
QTY.	QTY.	QTY.	QTY.	QTY.

NOTES:

- ALL RAILS TO BE SUPPLIED PREFABRICATED TO REQUIRED LENGTH WITH FACTORY INSTALLED END PLATES.
- BRACKET SPACING NOT TO EXCEED 32" ON CENTER.
- ALL MOUNTING HARDWARE TO BE SUPPLIED FOR FIELD ASSEMBLY AND INSTALLATION.
- INSIDE AND OUTSIDE CORNERS ARE NOT AVAILABLE. ALL RUNS MUST BE TERMINATED AT INSIDE AND OUTSIDE CORNERS.
- MATERIAL:
SCR-16SS CRASH RAIL SHALL BE MANUFACTURED 16 GAUGE STAINLESS STEEL, TYPE 304 ALLOY WITH V-GROOVE.

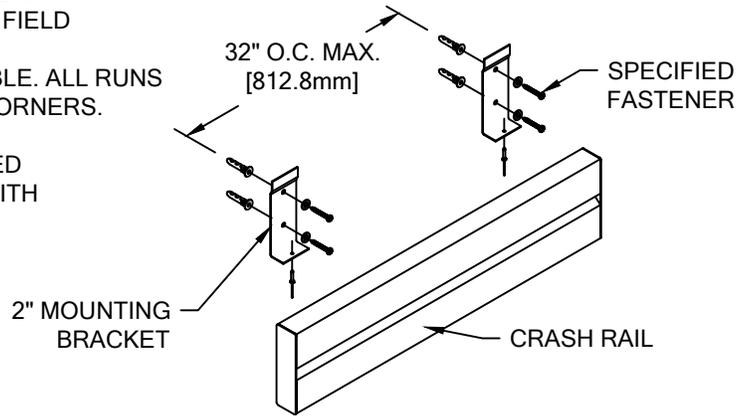

SCR-16SSV

 <p>Hughesville, PA 800.233.8493 570.546.5941 Mississauga, ON 888.895.8955 905.274.3611 www.c-sgroup.com</p> <p>© Copyright 2017 Construction Specialties, Inc.</p>	PROJECT:	REVISION:
	JOB NO.:	F&F:
	CUSTOMER:	
	REP:	DATE:
	DRAWN BY:	SHEET NO: