


COLOR: \_\_\_\_\_

(COLOR TO BE SELECTED FROM ONE OF C/S  
STANDARD COLORS.)

TOTAL  
L/F REQ'D

END  
CAPS

O.S.  
REQ'D

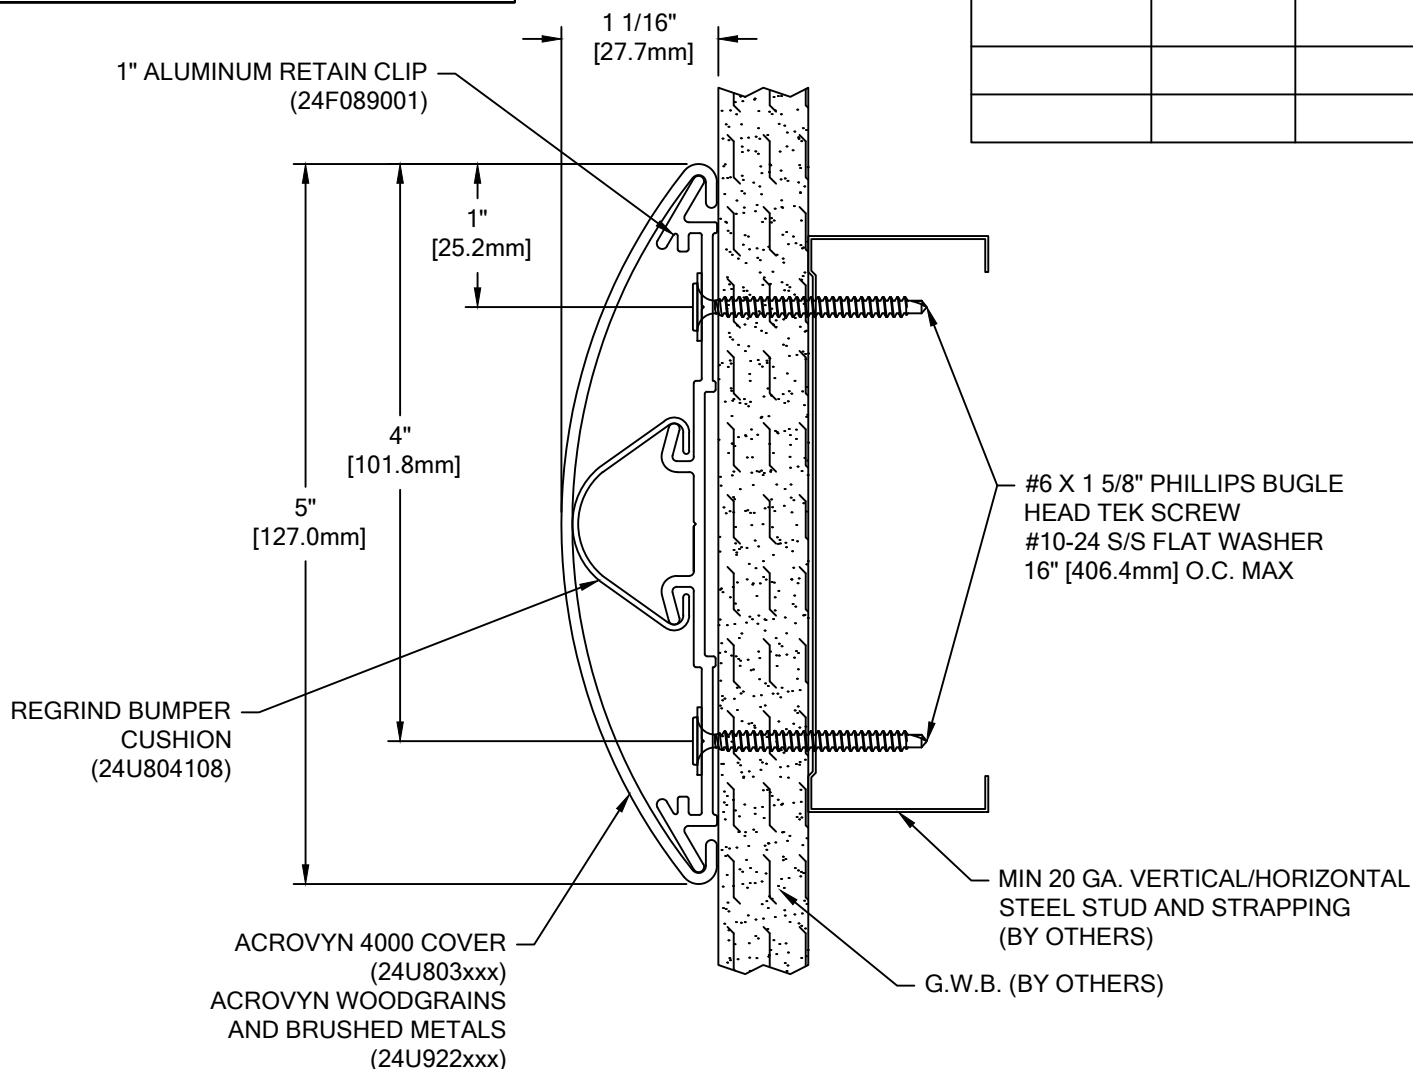

## SCR-50N ACROVYN 4000

| WALL CONDITION   | SPECIFIED FASTENER   | DRILL DIAMETERS |          | C/S PART NUMBER                     |
|--|--|-----------------|----------|-------------------------------------|
|  |  | WALL            | RETAINER |                                     |
| STEEL STUD/GYPSUM WALL   | #10 X 1 1/2" PHILLIPS PAN HEAD SMS<br>1/4" FLAT WASHER STEEL PLATED SAE<br>AF-6 PLASTIC ANCHOR | 1/4"            | 1/4"     | 90H189002<br>90H007003<br>90H039004 |
| CONCRETE/CONC. BLOCK   | #10 X 1 1/2" PHILLIPS PAN HEAD SMS<br>1/4" FLAT WASHER STEEL PLATED SAE<br>AF-6 PLASTIC ANCHOR | 1/4"            | 1/4"     | 90H189002<br>90H007003<br>90H039004 |
| WOOD STUD/GYPSUM WALL  | #10 x 2-1/4" PHILLIPS PAN HEAD SMS<br>1/4" FLAT WASHER STEEL PLATED SAE                        | N/A             | N/A      | 90H421008<br>90H007003              |
| 20 GA. MIN. STEEL STUD AND 20 GA. MIN. STEEL STRAPPING / GYPSUM WALL<br>(CONSTRUCTION REQUIRED (TEK SCREWS)) | #6 X 1 5/8" PHILLIPS BUGLE HEAD TEK SCREW<br>1/4" FLAT WASHER SAE                              | N/A             | N/A      | 90H079002<br>90H007003              |

PROJECT:

REVISION:

JOB NO.:

F&F:

CUSTOMER:

REP:

DATE:

DRAWN BY:

SHEET NO:



**Construction Specialties™**

6696 Route 405 Highway, Muncy PA 17756  
(800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com