CONTRACTOR NOTES:

- 1. ALL DIMENSIONS MUST BE FIELD VERIFIED TO A 1/16" TOLERANCE
- DIMENSIONS TO BE OBTAINED AT THE ELEVATION OF MATERIAL LOCATION. ALSO, MOUNTING CONDITION TO BE VERIFIED. FABRICATION CANNOT BEGIN WITHOUT THIS INFO.
- 3. SOME DIMENSIONS SMALLER THAN 16" MAY BE TOO SMALL TO FABRICATE


NOTES:

- ALL RAIL TO BE SUPPLIED PREFABRICATED TO REQUIRED LENGTH. ALL CORNERS AND END CAPS TO BE FACTORY FORMED TO SUIT FIELD CONDITIONS.
- ALL UNITS TO BE PRE-DRILLED FOR ATTACH. HOLE SPACING TO BE DETERMINED BY UNIT LENGTH, SPACING NOT TO EXCEED 32" ON CENTER
- ALL MOUNTING HARDWARE TO BE SUPPLIED FOR FIELD ASSEMBLY AND INSTALLATION.
- 4. MATERIAL:

CS ECR-32S CRASH RAIL SHALL BE MANUFACTURED FROM A 4" WIDE X 1/4" THICK EXTRUSION (#304 STAINLESS STEEL), DESIGNED FOR ELASTIC DEFORMATION UNDER IMPACT WITHOUT DAMAGING THE WALL TO WHICH IT HAS BEEN MOUNTED

5. FINISH:

THE ECR-32S CRASH RAIL SHALL BE FURNISHED WITH A 120 GRIT MECHANICAL #4 SATIN FINISH

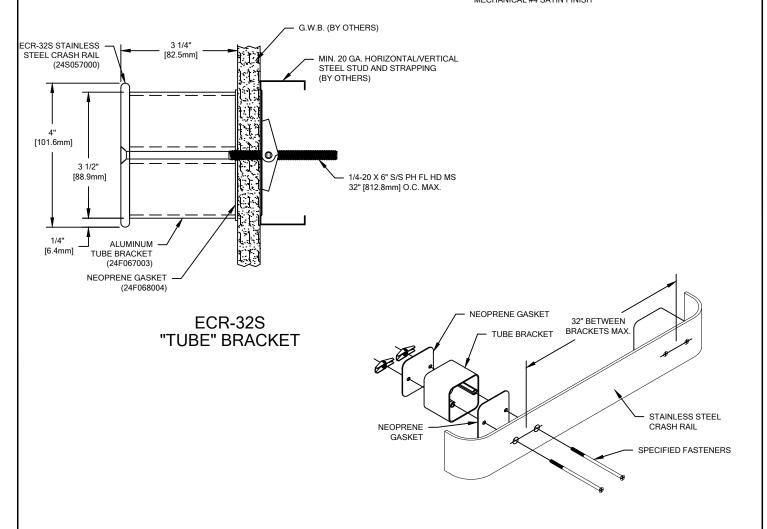

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART	
		WALL	RETAINER	NUMBER	
STEEL STUD/GYPSUM WALL	1/4-20 X 6" S/S PHILLIPS FLAT HEAD MS 1/4-20 TOGGLE	3/4"	N/A	90H307002 90H019004	
CONCRETE/CONC. BLOCK	1/4-20 X 5" S/S PHILLIPS FLAT HEAD MS 1/4-20 X 1 1/4" 4-WAY LEAD SHIELD	1/2"	N/A	90H308002 90H020004	
WOOD STUD/GYPSUM WALL	#14 X 6" PHILLIPS FLAT HEAD WOOD SCREW	3/16"	N/A	90H524002	



Hughesville, PA | 1800.233.8493 | 570.546.5941 Mississauga, ON | 1888.895.8955 | 905.274.3611 www.c-sgroup.com

© Copyright 2017 Construction Specialties, Inc.

PROJECT:	REVISION:	
JOB NO.:	F&F:	
CUSTOMER:		
REP:	DATE:	
DRAWN BY:	SHEET NO:	

DOC#: TS-930-538 ISSUE DATE: 06/02/04 REV DATE: 5/15/24