
## VB 640 Bold Line

## **Product Data - Standard Construction\***

BLADE MATERIAL	Extruded Aluminum (Alloy 6063-T6)
<b>BLADE THICKNESS</b>	0.068"
BLADE SPACING	4" on Center
BLADE DEPTH	Alternating 4" and 6"
BLADE LENGTH	Up to 20' Based on Wind Load
<b>BLADE FREE AREA</b>	65% Based on Standard Blade Spacing
FASTENERS	Stainless Steel
CONSTRUCTION	Mechanically Fastened
SECURED TO SUPPORTS	Extruded Aluminum Clip Angles
SUPPORT MATERIAL	Steel (by others)

\* When custom configuration is chosen CS shop drawings to serve as product data.



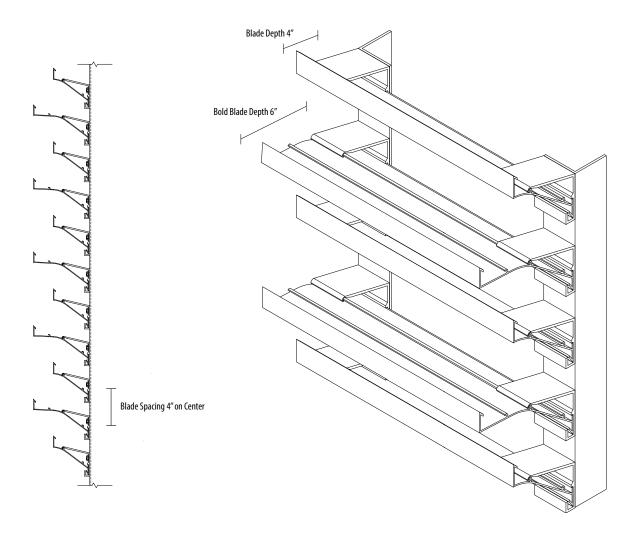

**S** Construction Specialties

Questions? Connect with a CS Representative. c-sgroup.com/representative-locator