
HF

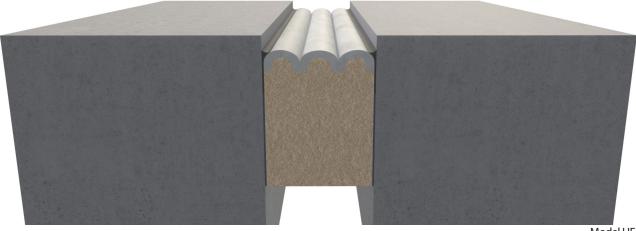

Model HF

HF is a watertight primary seal system for horizontal expansion joint conditions. It is great for parking garages, retrofit joints, plaza decks, stadium, and other watertight applications.

Advantages

- Watertight and durable primary seal
- Quick and easy installation
- Coated with factory applied sealant that is chemical resistant and UV stable
- Fire rated model (HFR) is available







Construction Specialties

Questions? Connect with a CS Representative. c-sgroup.com/representative-locator

c-sgroup.com | 800.233.8493 ©2023 Construction Specialties, Inc.

HF

Product Details

- Joint sizes range from 1" to 4" (25.4mm to 101.6mm)
- 6' 6" (198.1 cm) stick lengths
- Meets ASTM E1399




Finish Color



Warranty

• Standard Five-Year Warranty

Model Details



MODEL	FLOOR TO FLOOR	FIRE RATED
HF	•	
HFR	•	•





S Construction Specialties[•]

Questions? Connect with a CS Representative. c-sgroup.com/representative-locator

c-sgroup.com | 800.233.8493 ©2023 Construction Specialties, Inc.

 \rightarrow