RECESSED DEEP PIT RADIUS EDGE FRAME WITH DRAIN PAN
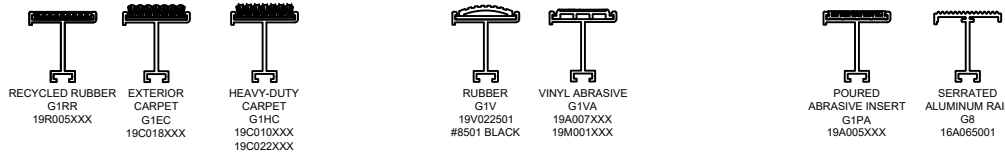
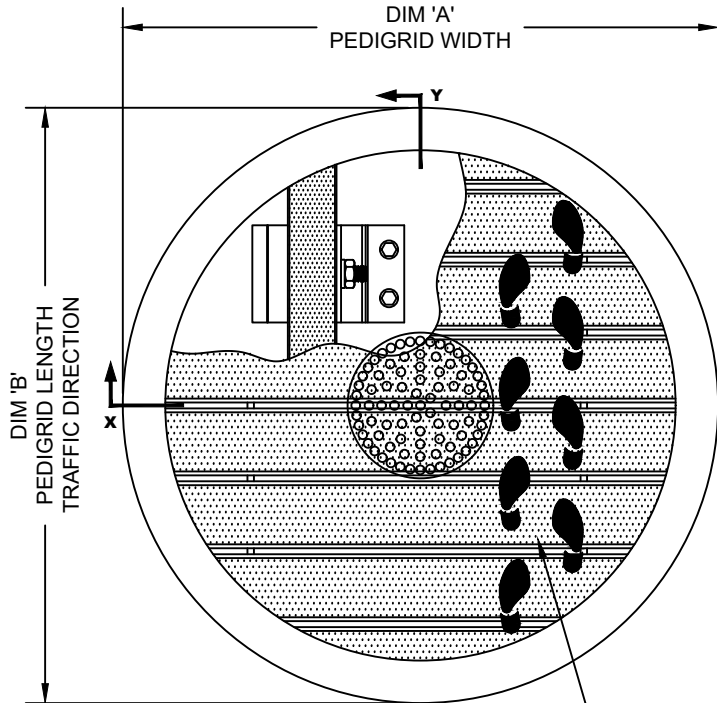INSERT STYLE: INSERT COLOR: PLEASE ADVISE   CATALOG NUMBER: G1   PART NUMBER:

NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

PEDIGRID INSERT STYLES

RECYCLED RUBBER
G1RR
19R005XXX

EXTERIOR
CARPET
G1EC
19C018XXX

HEAVY-DUTY
CARPET
G1HC
19C010XXX
19C022XXX

RUBBER
G1V
19V022501
#8501 BLACK

VINYL ABRASIVE
G1VA
19A007XXX
19M001XXX

POURED
ABRASIVE INSERT
G1PA
19A005XXX

SERRATED
ALUMINUM RAIL
G8
16A065001

TYPICAL PLAN VIEW

DIM 'A'
PEDIGRID WIDTH

DIM 'B'
PEDIGRID LENGTH
TRAFFIC DIRECTION

Y

X

PEDIGRID WILL BE SPLIT
INTO SECTIONS FOR INSTALLATION

SECTION X-Y

DIM 'A'
PEDIGRID
WIDTH
1/16"
[1.6mm]

DIM 'B'
PEDIGRID LENGTH
TRAFFIC DIRECTION
1 1/2"
[38.1mm]

7/8"
[22.2mm]

EXTRUDED ALUMINUM
RAIL (16A010XXX)

ALUMINUM KEY BAR
10" [254mm] O.C.
(16A006XXX)

CONTINUOUS
VINYL CUSHION
(16V002136)

4 3/16"
[106.4mm]

2 13/16"
[71.4mm]

ALUMINUM RADIUS
FRAME (16A011XXX)

EXTRUDED ALUMINUM SUPPORT
32" [812.8mm] O.C. MAX.
(16A005XXX)
SUPPORT LEGS STAGGERED
24" [609.6mm] O.C.
(90F002004)

16 GA PAN

2" [50.8mm] DRAIN
PIPE (BY OTHERS)

CONTRACTOR INSTALLED
2" [50.8mm] GENERAL PURPOSE
PVC DRAIN WITH S/S STRAINER
(FURNISHED BY C/S)

NOTES:

*GRIDS OVER STRUCTURES @ 32" O.C. TO SUPPORT A MAX LOAD OF 300 LBS PER SQ. FT. ALL GRIDS WITH LEVEL BASE FRAME TO SUPPORT A 400 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.

*PLEASE VERIFY TRAFFIC DIRECTION.

*MAXIMUM MODULE SIZE OF GRID NOT TO EXCEED 12'-0" [3.6M] IN WIDTH (DIM "A") & 3'-0" [.91M] IN LENGTH T.D. (DIM "B").
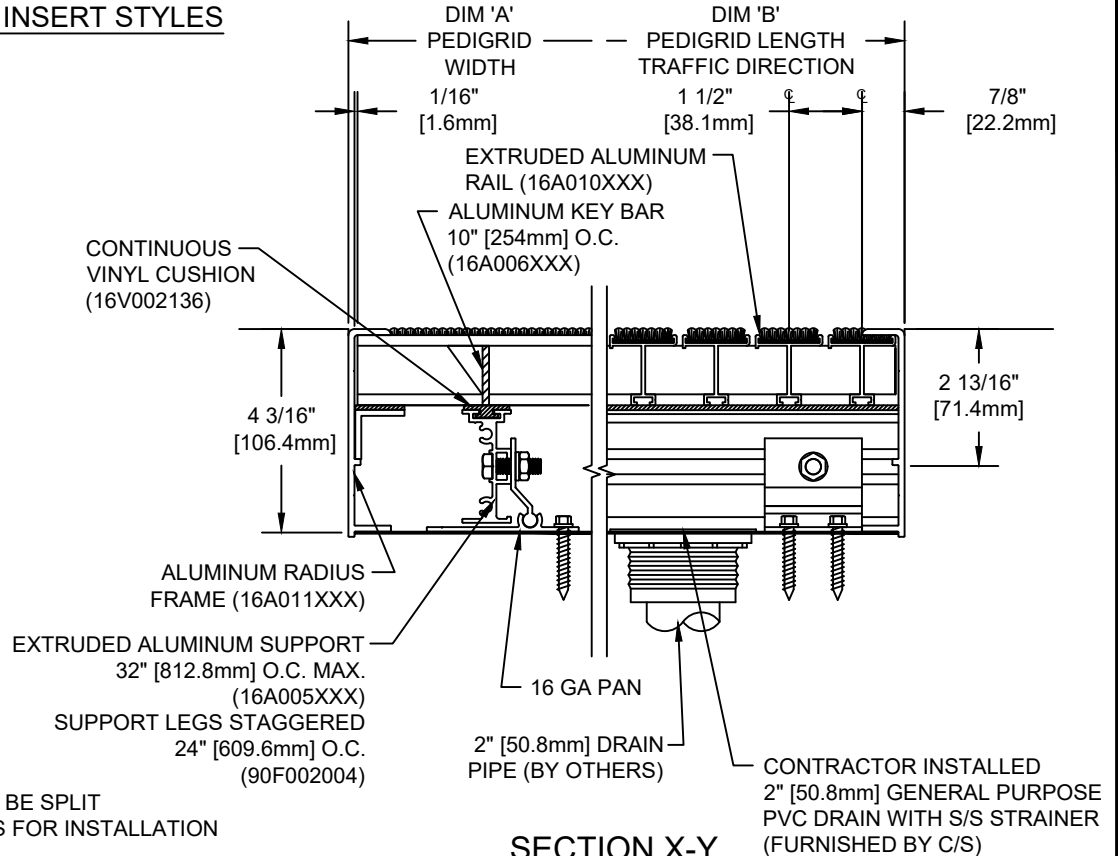
*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER.

*MITERED FRAME CORNERS ARE NOT AVAILABLE.

*WITH OPTION #2, THE ANCHOR LEG IS CUT OFF TO ALLOW FOR FLUSH MOUNTING IN A FORMED PIT.

*DUE TO 1 1/2" MODULE OF PEDIGRID, INSIDE OF FRAME DIMENSION SHOULD BE CHANGED ONLY IN INCREMENTS OF 1 1/2" [38.1mm] TO AVOID THE USE OF FILLER BARS.
*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

CS Construction Specialties™
6696 Route 405 Highway, Muncy PA 17756
(800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com

	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	REMARKS

PLEASE VERIFY ALL

PROJECT:
LOCATION:
CONTRACTOR:
AGENT: SHT:
DRG. BY: DATE: JOB NO.: