
## NOTES: 1. ANGLES ONLY AVAILABLE BETWEEN 70° - 160°. STANDARD ANGLE IS 135° CEILING CONCRETE (BY OTHERS)

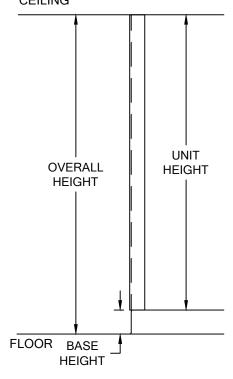

**ANGLE** 

LG-200M CORNER GUARD AT FULL HEIGHT ELEVATION

## **LG-200M**

STEEL STUD

(BY OTHERS)

G.W.B. (BY OTHERS)

STEEL STUDIGYPSUM WALL UCONCRETEROON. BLOCK  STEEL STUDIGYPSUM WALL UCONCRETEROON. BLOCK  LG 334 1 1/8" SCREW/NAIL LG 118/150/200/250 1" SCREW NAIL  LG 118/150/200/250 1" SCREW NAIL  N/A N/A 90H135002 90H135002	WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART
WOOD STUD/GYPSUM WALL   LG 034 1 1/8" SCREW/NAII   N/A   N/A   90H136002   1   1   1   1   1   1   1   1   1			WALL	RETAINER	NUMBER
	WOOD STUD/GYPSUM WALL		N/A	N/A	

**ANGLE** 

[50.8mm]

NOTE: LG CORNER GUARDS THAT ARE REQUESTED WITHOUT PRE-DRILLED HOLES DO NOT INCLUDE FASTENERS WITH THE EXCEPTION OF MODEL LG-034. FOR MODEL LG-034, FASTENERS ARE ALWAYS SUPPLIED, AND HOLES ARE NOT PRE-DRILLED.



R1/8"

[R3.2mm]

Hughesville, PA | 800.233.8493 | 570.546.5941 Mississauga, ON | 888.895.8955 | 905.274.3611 www.c-sgroup.com

© Copyright 2017 Construction Specialties, Inc.

PROJECT:	REVISION:
JOB NO.:	F&F:
CUSTOMER:	
REP:	DATE:
DRAWN BY:	SHEET NO:

DOC#: TS-930-224 ISSUE DATE: 11/13/00 REV DATE: 8/4/17