

GFPS & GFPSW Series

TECHNICAL DATA:

Aluminum


- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61) ASTM B221

Primary Seal

- Dual Durometer 65 Shore A, 90 Shore A, ASTM D2240
- Available in 5 Standard colors

Standard Loading

- 500 lbs.

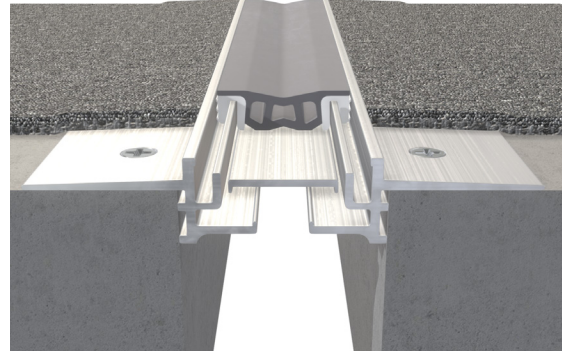

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
GFPS-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.18" (30mm)	N/A	N/A
GFPS-200	2.00" (51mm)	1.50" (38mm)	2.50" (64mm)	1.88" (48mm)	N/A	N/A
GFPSW-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.09" (28mm)	N/A	N/A
GFPSW-200	2.00" (51mm)	1.50" (38mm)	2.50" (64mm)	1.94" (49mm)	N/A	N/A

