


HFR Series

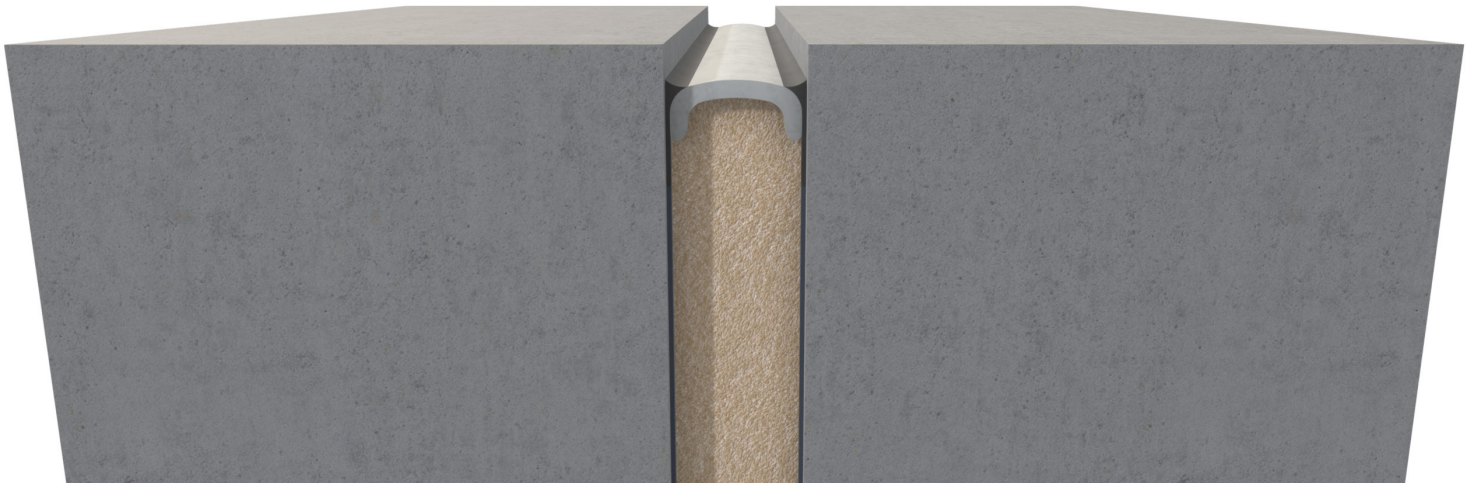

Model HFR

This pre-compressed impregnated foam cover is fire rated, watertight, and sound suppressing. It is ideal for parking garages, retrofit joints, plaza decks, stadium applications, or anywhere a fire rated and watertight seal is required. Available in 2 or 3-hour fire rating.

Advantages

- Available in 2 or 3 hour fire rating
- Ideal for horizontal applications where a watertight seal is required
- Pre-compressed, fire retardant impregnated foam
- Sound suppressing




[View 3D Model](#) →

HFR Series

Product Details

- Joint sizes range from 1" to 4" (25.4mm to 101.6mm)
- 6' 6" (198.12 cm) stock lengths
- Available in 2 or 3-hour fire rating
 - 2HFR pre-coated with traffic silicone coating
 - 3HFR has silicone upper layer & intumescent bottom layer

Model Details



Floor to Floor

Color



Deck Gray

Certifications

Has been tested and certified under UL 2079. Meets the requirements of ASTM E1966, ASTM E119 and ASTM E1399.

Warranty

- Standard Five-Year Warranty

Listing Chart

RATING	NOMINAL JOINT SIZE	APPLICATION	COMPRESSION	EXTENSION	HFR LISTING NUMBER
2HR	1/2" - 2"	Floor to Floor	50%	50%	FF-D-0135
		Floor to Wall	50%	50%	FW-D-0086
	2-1/4" - 4"	Floor to Floor	50%	50%	FF-D-1189
		Floor to Wall	50%	50%	FW-D-1119
3HR	1/2" - 2"	Floor to Floor	25%	25%	FF-D-0136
		Floor to Wall	25%	25%	FW-D-0087
	2-1/4" - 4"	Floor to Floor	25%	25%	FF-D-1190
		Floor to Wall	25%	25%	FW-D-1120



Learn More

