


# FB-22

**PRODUCT DESCRIPTION:**

FB-22 fire barrier is a blanket and insulation block type barrier designed for 6" (maximum open) floor expansion joints. FB-22 provides a 2-hour (up to 6" max. open) and 3-hour (up to 3" max. open) floor fire endurance rating, minimizing smoke passage and accommodates dynamic movement without degradation of the material. The barriers have been tested and are third-party listed and will meet most current building codes and testing criteria.

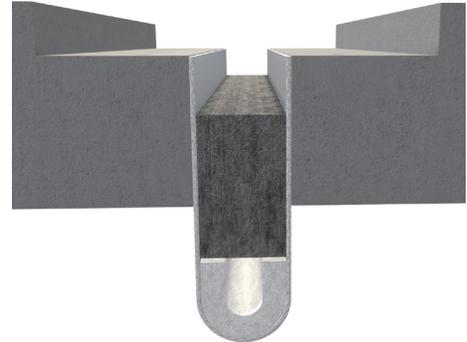

**BASIC USES**

For 6" (maximum open) floor horizontal rated expansion joints for buildings and parking decks.

2-Hour up to 6" (maximum open) and 3-Hour up to 3" (maximum open)

**TECHNICAL DATA**

PERFORMANCE STANDARDS: UL-2079, ASTM E1399  
 CODE COMPLIANCE: IBC

**PRECAUTIONS**

Refer to Material Safety Data Sheet for detailed health and safety information prior to use.

**WARRANTY**

CS warrants that its products are manufactured free of defects and conform to the technical data listed. Under this warranty, we will replace (at no charge) any material proven defective when applied in accordance with our written instructions for applications recommended by us as suitable for subject products. CS shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of the product.

RATING	MAX OPEN	APPLICATION	FB-22 LISTING NUMBER
2HR/3HR	1½"-3"	Floor	CSI/EJCA 120-04
			CSI/EJCA 180-02
2HR	4½"-6"	Floor	CSI/EJCA 120-04