
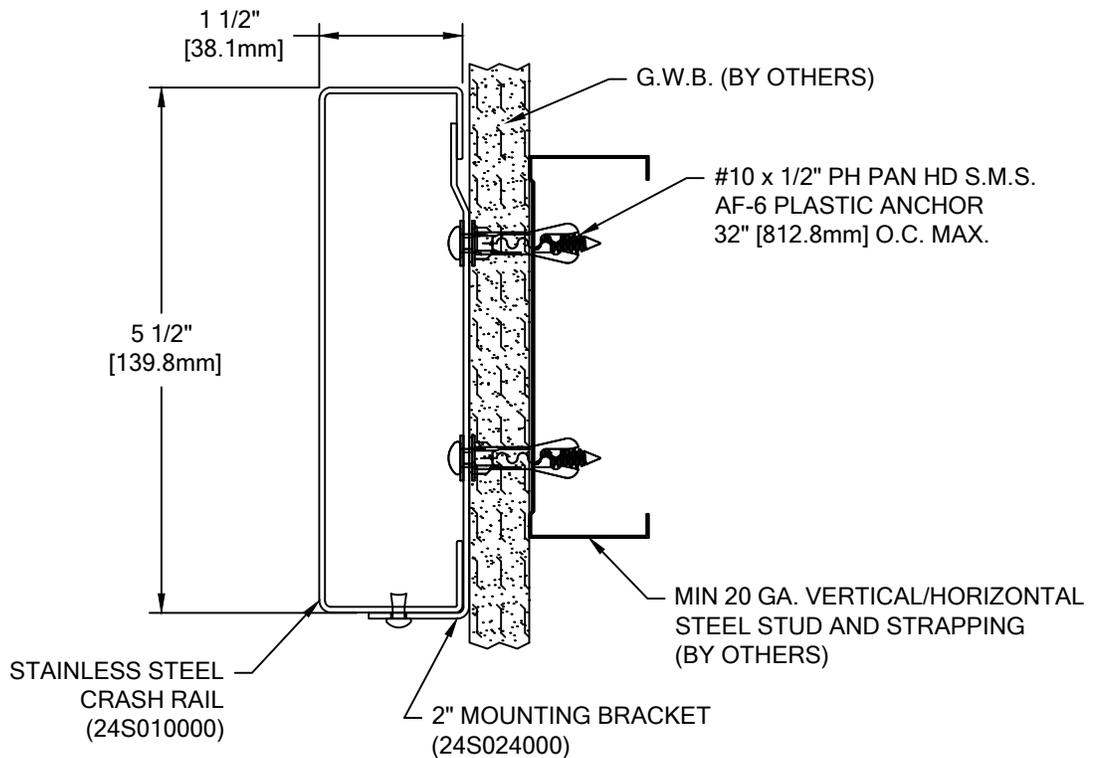


RAIL: PLAIN FACE RAIL 10'-0" LONG (24S010000)	2" MOUNTING BRACKET (24S024000)	4" MOUNTING BRACKET (24S025000)	POP RIVETS: 1/8" X 5/8" STAINLESS STEEL (90H966002)	WALL MOUNT HARDWARE: #10 X 1-1/2" PHILLIPS PAN HD SMS (90H969002) AF-6 PLASTIC ANCHOR (90H453004) #6 PHILLIPS PAN HEAD BUGLE HEAD TEK SCREW (90H079002)
QTY.	QTY.	QTY.	QTY.	QTY.

**NOTES:**

1. ALL RAILS TO BE SUPPLIED PREFABRICATED TO REQUIRED LENGTH WITH FACTORY INSTALLED END PLATES.
2. BRACKET SPACING NOT TO EXCEED 32" ON CENTER.
3. ALL MOUNTING HARDWARE TO BE SUPPLIED FOR FIELD ASSEMBLY AND INSTALLATION.
4. INSIDE AND OUTSIDE CORNERS ARE NOT AVAILABLE. ALL RUNS MUST BE TERMINATED AT INSIDE AND OUTSIDE CORNERS.
5. MATERIAL:  
SCR-16SS CRASH RAIL SHALL BE MANUFACTURED 16 GAUGE STAINLESS STEEL, TYPE 304 ALLOY.

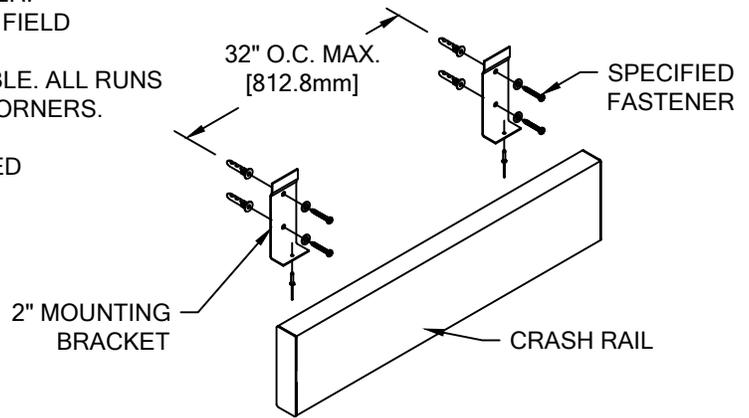

# SCR-16SSP

 <p>Hughesville, PA   800.233.8493   570.546.5941 Mississauga, ON   888.895.8955   905.274.3611 <a href="http://www.c-sgroup.com">www.c-sgroup.com</a></p> <p>© Copyright 2017 Construction Specialties, Inc.</p>	PROJECT:	REVISION:
	JOB NO.:	F&F:
	CUSTOMER:	
	REP:	DATE:
	DRAWN BY:	SHEET NO: