


CHANNEL GUARD:
 COLOR: _____
 *THICKNESS: _____
 COLOR TO BE SELECTED FROM ONE OF CS STANDARD COLORS
 *CHANNEL GUARDS ARE AVAILABLE IN .040" AND .060" THICKNESS.
 PLEASE ADVISE THICKNESS REQUIRED.

UNITS REQ'D	UNIT HEIGHT	LEG WIDTH	WALL WIDTH


NOTES:

- STANDARD TFCH CHANNEL GUARDS HAVE 6" LEGS. PLEASE ADVISE IF DIFFERENT SIZE IS DESIRED.
- MINIMUM LEG WIDTH IS 1". MAXIMUM LEG WIDTH IS 24".
- CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT.

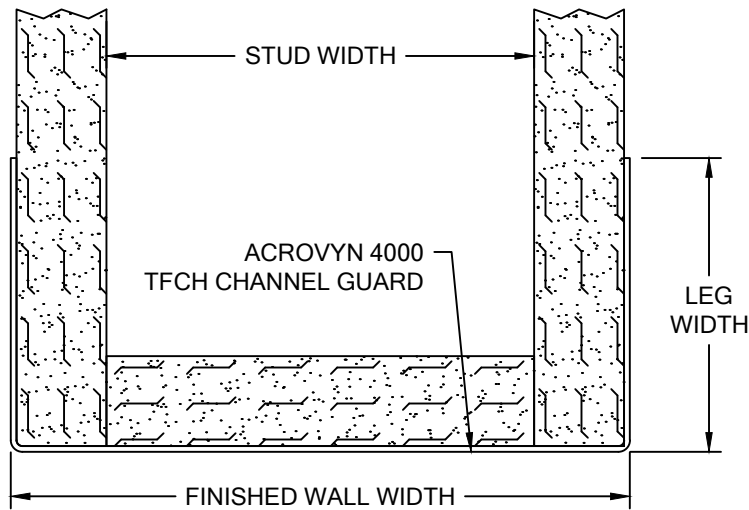

TFCH CHANNEL GUARD ACROVYN 4000

WALL CONDITION	SPECIFIED FASTENER	QUANTITY	CS PART NUMBER
STEEL STUD/GYPSUM WALL CONCRETE/CONC. BLOCK WOOD STUD/GYPSUM WALL	ACROVYN INTERIORS HEAVY DUTY WATER BASED MASTIC ADHESIVE	1 GAL. 5 GAL.	90M108001 90M107001

 Hughesville, PA 800.233.8493 570.546.5941 Mississauga, ON 888.895.8955 905.274.3611 www.c-sgroup.com © Copyright 2017 Construction Specialties, Inc.	PROJECT:	REVISION:
	JOB NO.:	F&F:
	CUSTOMER:	
	REP:	DATE:
	DRAWN BY:	SHEET NO: