


CORNER GUARD:
COLOR: _____
***THICKNESS:** _____
 COLOR TO BE SELECTED FROM ONE OF CS STANDARD COLORS
 *CORNER GUARDS ARE AVAILABLE IN .040" AND .060" THICKNESS.
 PLEASE ADVISE THICKNESS REQUIRED.

UNITS REQ'D	UNIT HEIGHT	LEG WIDTH

NOTES:


1. STANDARD TFC CORNER GUARDS HAVE 6" LEGS. PLEASE ADVISE IF DIFFERENT SIZE IS DESIRED.
2. MINIMUM LEG WIDTH IS 1". MAXIMUM LEG WIDTH IS 24".
3. CORNER GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT.

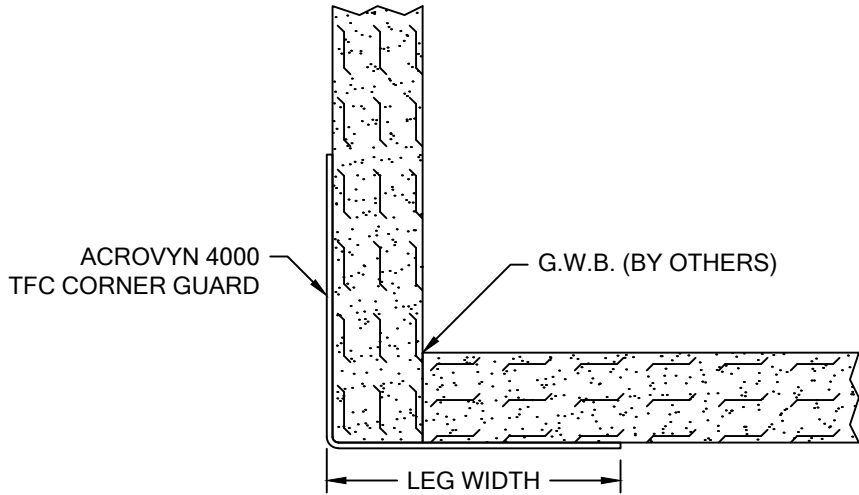

TFC CORNER GUARD

ACROVYN 4000

WALL CONDITION	SPECIFIED FASTENER	QUANTITY	CS PART NUMBER
STEEL STUD/GYPSUM WALL CONCRETE/CONC. BLOCK WOOD STUD/GYPSUM WALL	ACROVYN INTERIORS HEAVY DUTY WATER BASED MASTIC ADHESIVE	1 GAL. 5 GAL.	90M108001 90M107001

 Hughesville, PA 800.233.8493 570.546.5941 Mississauga, ON 888.895.8955 905.274.3611 www.c-sgroup.com © Copyright 2017 Construction Specialties, Inc.	PROJECT:	REVISION:
	JOB NO.:	F&F:
	CUSTOMER:	
	REP:	DATE:
	DRAWN BY:	SHEET NO: