


RFD & RFWD

TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221
- Sheet – 6061-T6, 3003-H14, 5005-H34, ASTM B209
- The single-hinged assembly can accommodate a 1 3/8" slab offset in floor elevation

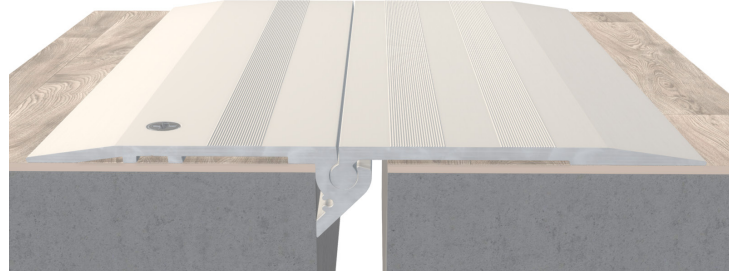

Standard Loading

- 2,000 lbs.



Capable of Lateral Movement

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
RFD-100	1.00" (25mm)	0.75" (19mm)	4.00" (102mm)	9.38" (238mm)	N/A	N/A
RFD-200	2.00" (51mm)	0.75" (19mm)	4.00" (102mm)	9.38" (238mm)	N/A	N/A
RFD-300	3.00" (76mm)	0.75" (19mm)	6.00" (152mm)	11.38" (289mm)	N/A	N/A
RFD-400	4.00" (102mm)	0.75" (19mm)	6.00" (152mm)	11.38" (289mm)	N/A	N/A
RFWD-100	1.00" (25mm)	0.75" (19mm)	4.00" (102mm)	5.38" (137mm)	N/A	N/A
RFWD-200	2.00" (51mm)	0.75" (19mm)	4.00" (102mm)	5.38" (137mm)	N/A	N/A
RFWD-300	3.00" (76mm)	0.75" (19mm)	6.00" (152mm)	7.38" (187mm)	N/A	N/A
RFWD-400	4.00" (102mm)	0.75" (19mm)	6.00" (152mm)	7.38" (187mm)	N/A	N/A

