


VFR Series

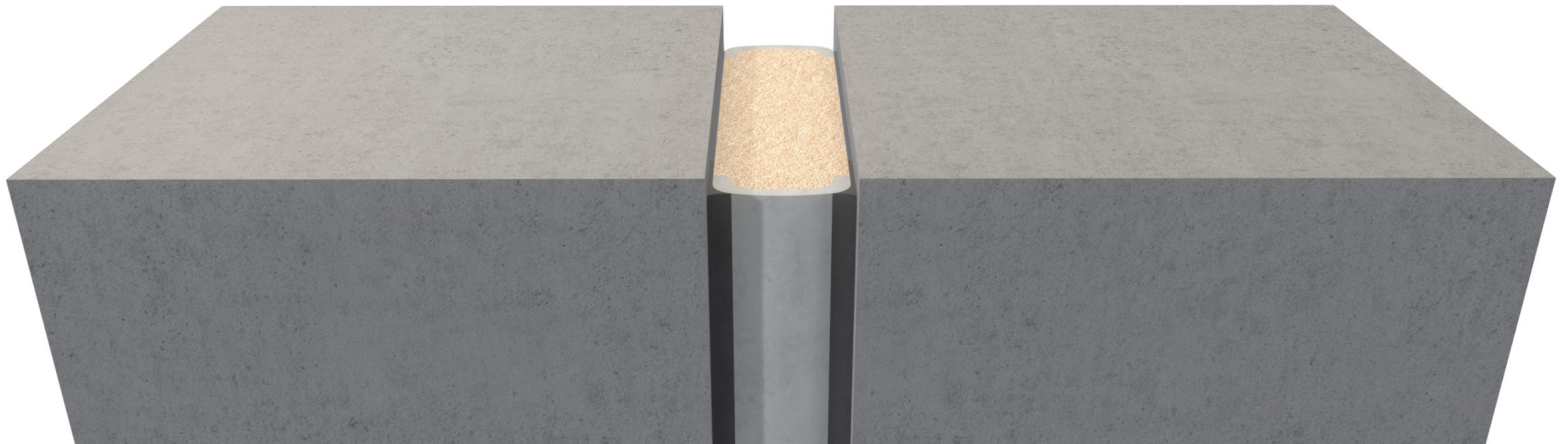

Model VFR

This pre-compressed fire-retardant impregnated foam has waterproof silicone on either facing side. Symmetrical in design, either side can face out from an exterior or interior wall. This cover is ideal for exterior and interior wall construction joints in vertical plane applications, retrofit joints, pre-cast concrete walls, and exterior panel systems. Available in 2 or 3-hour fire rating.

Advantages

- Available in 2 or 3 hour fire rating
- Ideal for vertical applications where a watertight seal is required
- Provides sound attenuation and thermal efficiency
- Applications include retrofit, pre-cast concrete walls, and exterior panel systems
- Pre-compressed, fire retardant impregnated foam




[View 3D Model](#) →

VFR Series

Product Details


- Joint sizes range from 1" to 6" (25.4mm to 152.4mm)
- 6' 6" (2m) stock lengths
- Meets ASTM E1399

Model Details



Wall to Wall

Color Options

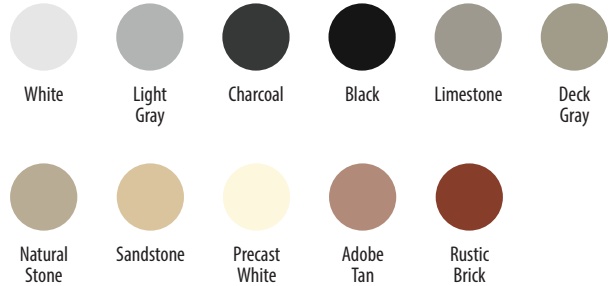

Certifications

Has been tested and certified under UL 2079. Meets the requirements of ASTM E1966, ASTM E119 and ASTM E1399.

Warranty

- Standard Five-Year Warranty

RATING	NOMINAL JOINT SIZE	APPLICATION	COMPRESSION	EXTENSION	VFR LISTING NUMBER
2HR	1/2" - 2"	Gypsum Wall	50%	50%	WW-D-0222
		Concrete Wall	50%	50%	WW-D-0221
		Floor to Concrete Wall	50%	50%	HW-D-0828
	2 1/4" - 6"	Gypsum Wall	50%	50%	WW-D-1206
		Concrete Wall	50%	50%	WW-D-1205
		Floor to Concrete Wall	50%	50%	HW-D-1127
2" - 4"	Gypsum Wall	50%	50%	WW-D-1208	
	Concrete Wall	50%	50%	WW-D-1209	
3HR	1/2" - 2"	Concrete Wall	25%	25%	WW-D-0223
	2 1/4" - 6"	Concrete Wall	25%	25%	WW-D-1207



Learn More →