

SJMHD


TECHNICAL DATA:

Aluminum


- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221
- Sheet – 6061-T6, 3003-H14, 5005-H34, ASTM B209

Standard Loading

- 2,000 lbs.

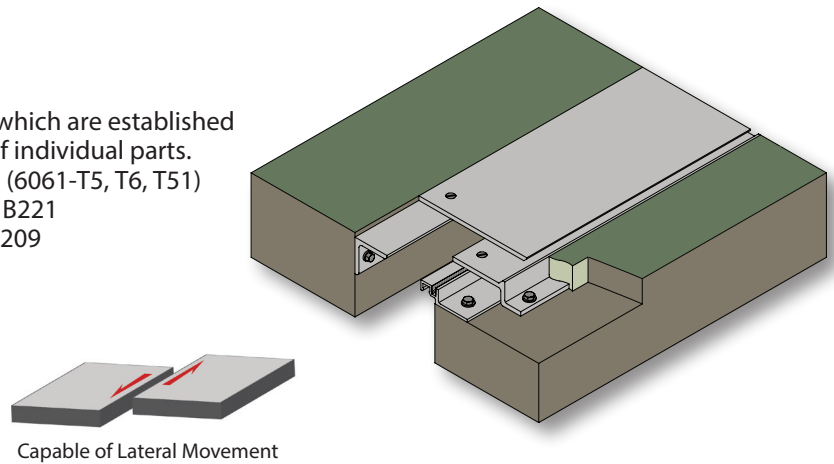

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
SJM-200HD	2.00" (51mm)	1.25" (32mm)	4.50" (114mm)	5.38" (137mm)	4.63" (118mm)	1.38" (35mm)
SJM-300HD	3.00" (76mm)	1.25" (32mm)	5.00" (127mm)	5.88" (149mm)	4.13" (105mm)	1.38" (35mm)
SJM-400HD	4.00" (102mm)	1.63" (41mm)	5.50" (140mm)	6.38" (162mm)	3.63" (92mm)	1.38" (35mm)
SJM-500HD	5.00" (127mm)	1.63" (41mm)	6.50" (165mm)	7.38" (187mm)	3.63" (92mm)	1.38" (35mm)
SJM-600HD	6.00" (152mm)	1.63" (41mm)	8.00" (203mm)	8.88" (226mm)	4.13" (105mm)	1.38" (35mm)
SJM-700HD	7.00" (178mm)	4.88" (124mm)	10.38" (264mm)	10.38" (264mm)	4.63" (118mm)	1.38" (35mm)
SJM-800HD	8.00" (203mm)	5.38" (137mm)	10.88" (276mm)	11.38" (289mm)	4.63" (118mm)	1.38" (35mm)

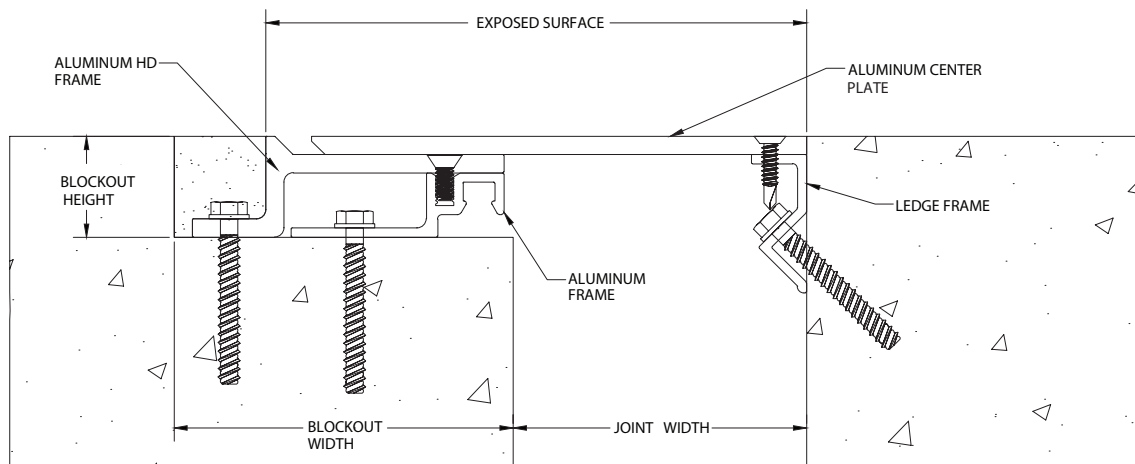

SJMHD