


PEDITRED LP WITH RECESSED TAPERED ANGLE FRAME AND THRESHOLD FRAME


INSERT STYLE: INSERT COLOR: PLEASE ADVISE CATALOG NUMBER: G3 PART NUMBER:

 RECYCLED RUBBER G3RR 19R005XXX	 EXTERIOR CARPET G3EC 19C018XXX	 HEAVY-DUTY CARPET G3HC 19C010XXX 19C022XXX	 RUBBER G3V 19V022501 #8501 BLACK	 VINYL ABRASIVE G3VA 19A007XXX 19M001XXX	 SERRATED ALUM. INSERT G3SAI 19A004001
--	---	--	---	--	--


PEDITRED INSERT STYLES

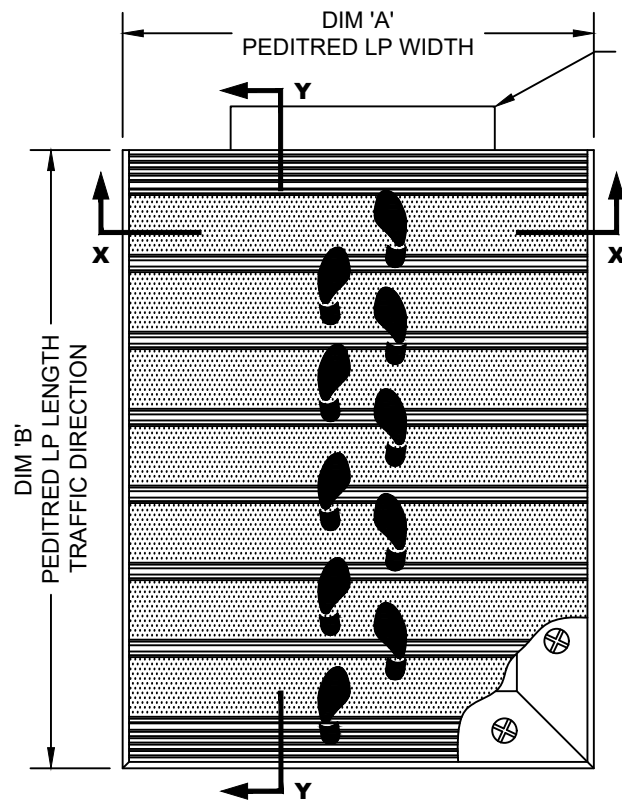

TYPICAL PLAN VIEW

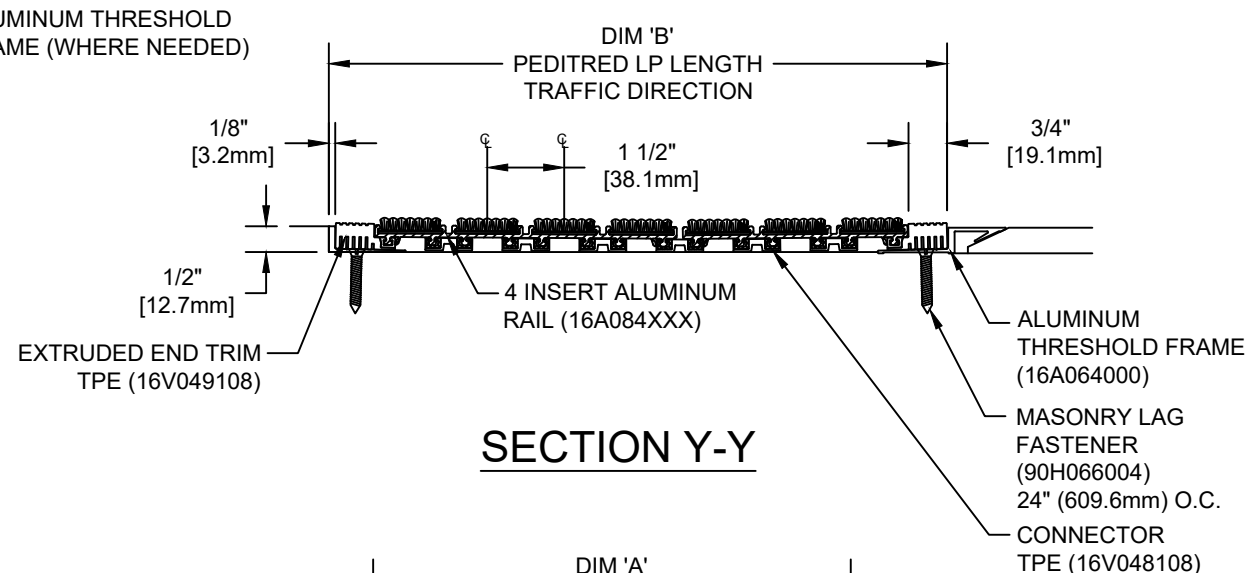

SECTION Y-Y

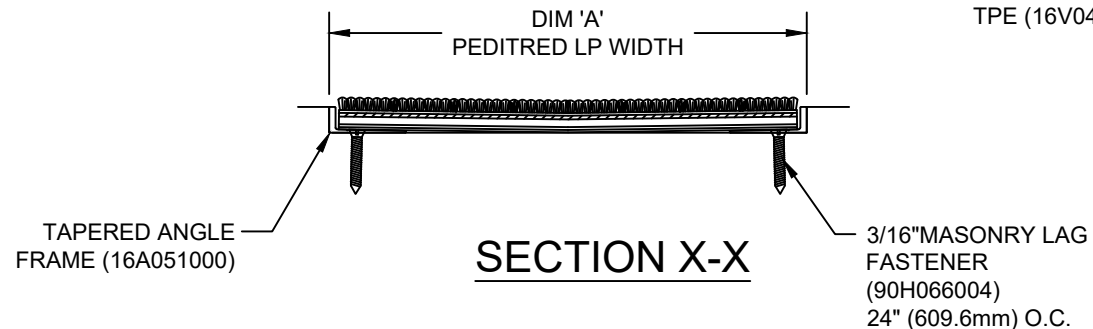

SECTION X-X

NOTES:

*PLEASE VERIFY TRAFFIC DIRECTION
*PEDITRED LP SHALL BE ABLE TO
SUPPORT A 750 LB. ROLLING LOAD.

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M)
IN WIDTH (DIM "A") OR 3'-0" [.91M] IN LENGTH (DIM "B").
*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE
LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE
CONSIDERED PART OF THIS TRANSMITTAL.

CS Construction Specialties
6696 Route 405 Highway, Muncy PA 17756
(800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com

PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES	PROJECT:		
									LOCATION:		
									CONTRACTOR:		
									AGENT:		SHT:
									DRG. BY:	DATE:	JOB NO.: