
GridLine® with Inserts

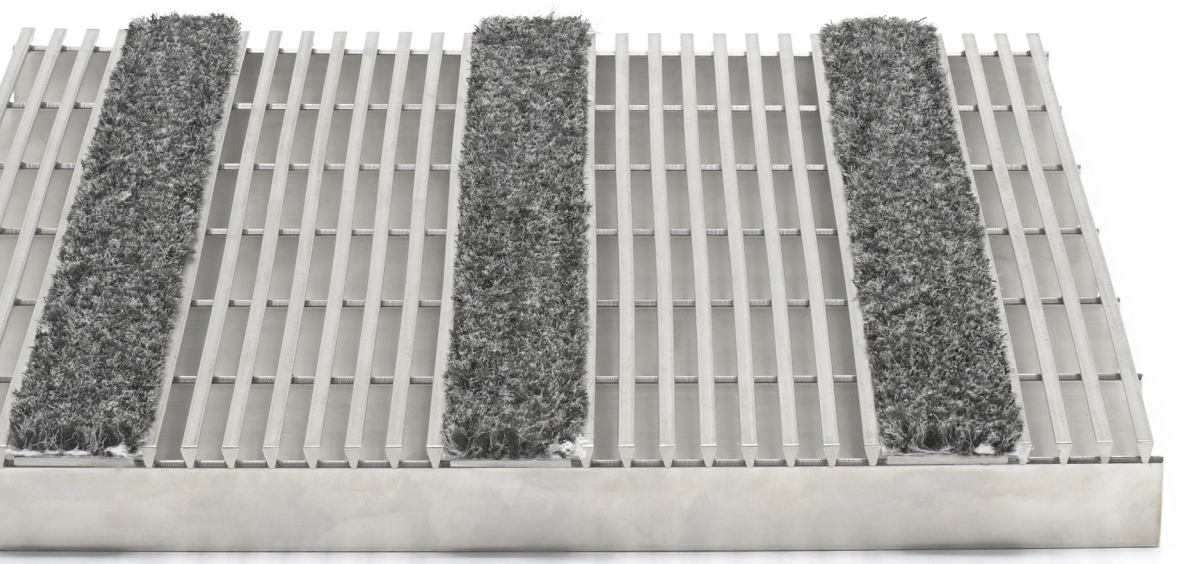

Model G62C

A variation on our classic GridLine® system, GridLine with Inserts features your choice of carpet, recycled rubber or SlipNOT inserts evenly spaced between stainless steel wires. This high-end, heavy-duty grid system effectively removes dirt and debris at the entrance. It protects interior flooring and carpets by trapping incoming dirt and debris from pedestrian shoes. Perfect for areas with excessive rain or snow, designers and owners love the high-tech appearance of the satin finish, and building owners love the durability of stainless steel combined with easy maintenance.

Advantages

- Insert options provide extra slip-resistance and scraping capabilities
- High-end, high-tech appearance
- Extremely durable
- Easy maintenance
- Coordinates with surrounding stainless steel accents

Applications

- Interior and exterior entries
- Vestibules
- Regions that see excessive rain and/or snow

Building Segments

- Education
- Civic & Culture
- Corporate & Commercial
- Healthcare
- Hospitality
- Mixed Use
- Retail
- Sports & Convention Centers
- Transportation
- Automobile Showroom

©2026 Construction Specialties, Inc.

GridLine® with Inserts

Product Details

- Product depths:

INSERT TYPE	MODEL	5/8" (15.9mm)	1⅛" (28.6mm)
Carpet	G6PC		●
Recycled Rubber	G62RR		●
SlipNOT	G6SN	●	●


Additional depths available, contact your local representative for more details.

- Product dimensions:

TYPE	WIDTH	STANDARD SPACING	ON-CENTER SPACING
Wire	.157" (3.9mm)	.217" (5.5mm)	.374" (9.5mm)
Inserts	1.25" (31.8mm)	2.75" (69.9mm)	4" (101.6mm)

- Alloy options:
  - Standard: Type 304, #4 Finish
  - Optional: Type 316, #4 Finish


Connection Details

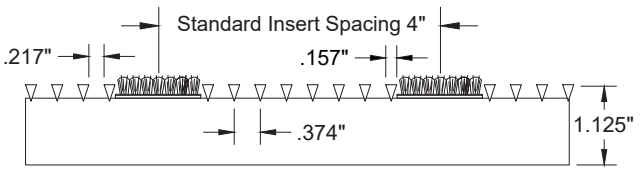

Certifications/Testing

- Rolling Load Capacity
  - Standard 500 lb/wheel
  - Deep Pit Frame Applications 300 lb/wheel
- ASTM D-2047-96 SCOF: 0.60 Wet
- LEED EQ credit 5
- Low VOC Emissions Certificate – Intertek Clean Air Gold (CDPH 01350 v1.2)
- Approved for applications where automobiles will periodically drive over them.


Lockdown Options




Welded tab

Mounting Options

- No Frame




Level base frame w/optional drain pan

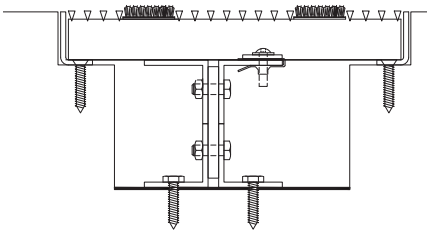


Deep pit frame w/optional drain pan (1⅛" depth only)


Insert Options



MonoTuft HD / Exterior Brush Tread (Model G62C)



Recycled Rubber (Model G62RR)



SlipNOT (Model G62SN)

Warranty

- Five-Year Product Warranty

Learn More →

©2026 Construction Specialties, Inc.