


# Model RS-2300

## 2" (50.8 mm) Storm Resistant Fixed Horizontal Louver

**Material:**

Material:	6063-T6 Alloy
Nominal Thickness (heads, sills, jambs, & mullions):	0.050" (1.27 mm)
Nominal Blade Thickness:	0.050" (1.27 mm)
Furnished With:	Birdscreen: ½" (12.7mm) intercrimp aluminum mesh, 0.063" (1.60 mm) diameter wire removeable aluminum bird screen in an aluminum frame
Additional Options (at additional cost):	Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Flange frames, Integrated glazing frames

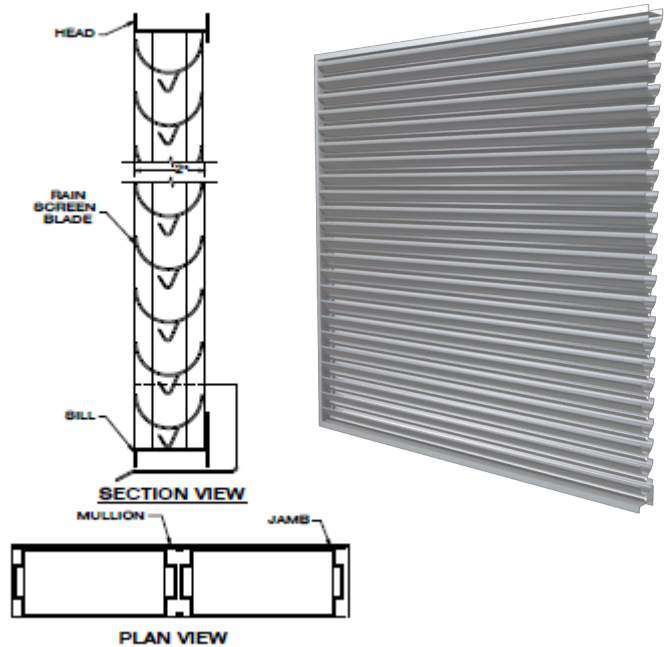

**Test Summary:**  
For a 4 Foot by 4 Foot Unit.

Tested with mill finish and no screen

- Free area = 6.71 ft² (0.63 m²)
- Percent free area = 42.0%
- Intake Pressure Drop at 900 FPM free area velocity = 0.51 in H<sub>2</sub>O (126.7 Pa)
- To maintain a CLASS A (99%) effectiveness rating\* with:
  - a 29.1 mph wind speed and rainfall rate of 3 in/hr
    - Max. intake core velocity 1.0 m/s (196 FPM)
    - Max. intake free area velocity 2.28 m/s (449 FPM)

**Discharge Coefficient**  
Intake Cd = 0.14 (Class 4)  
AMCA certifies the coefficient class only



Construction Specialties Inc. certifies that the louver model RS-2300 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified ratings Program. The AMCA Certified Ratings Seal applies to wind driven rain and air performance ratings.




**Wind Driven Rain Performance: Tested with 1m² core area, mill finish and no screen\***

29.1 mph (13 m/s) & 3" (75 mm) rain per hour

Core Velocity Through Cal. Plate (m/s):	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5
Core Velocity Through Louver (ft/min):	0	106	196	291	391	493	582	667
Free Area Velocity (ft/min):	0	243	449	666	895	1129	1333	1528
Rating Effectiveness:	A	A	A	B	C	D	D	D
Effectiveness Ratio (%):		100.0	100.0	97.6	82.3	60.1	34.4	1.2
Effectiveness Rating:	A = 1 to 0.99		B = 0.989 to 0.95		C = 0.949 to 0.80		D = Below 0.80	

# Model RS-2300

## 2" (50.8 mm) Storm Resistant Fixed Horizontal Louver

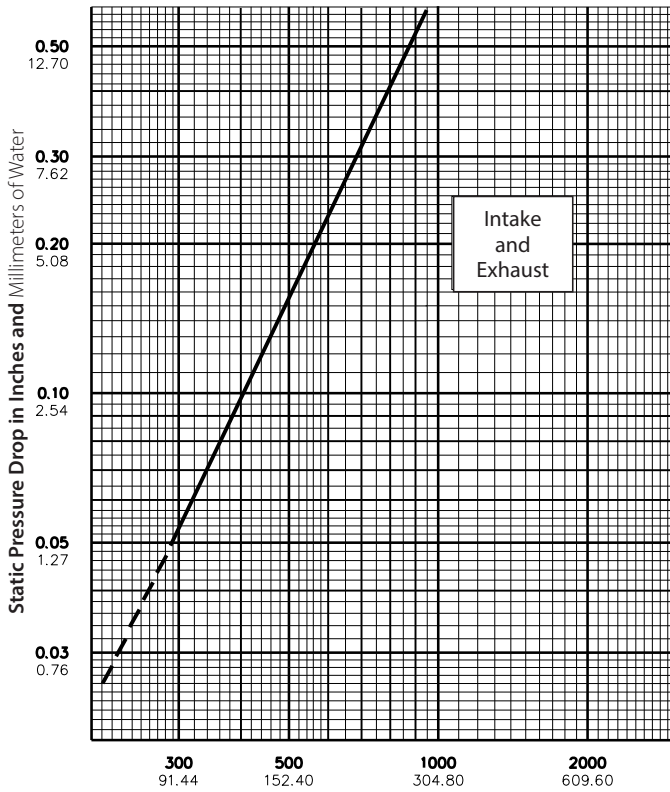

Air Velocity in Feet and Meters per Minute Through Free Area

Data corrected to standard air density.  
48" x 48" (121.92cm x 121.92cm) louver tested to figure 5.5.

### Free Area Table (Free area in sq. feet and sq. meters)

For additional sizes, please visit:

<https://www.c-sgroup.com/louvers-airflow-tool>

		Width in Inches and Meters									
		18	24	30	36	42	48	54	60	66	
		0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	
Height in Inches and Meters	18	<b>0.78</b>	<b>1.07</b>	<b>1.37</b>	<b>1.66</b>	<b>1.96</b>	<b>2.26</b>	<b>2.55</b>	<b>2.85</b>	<b>3.03</b>	
	0.46	0.07	0.10	0.13	0.15	0.18	0.21	0.24	0.26	0.28	
24	<b>1.09</b>	<b>1.50</b>	<b>1.92</b>	<b>2.33</b>	<b>2.74</b>	<b>3.16</b>	<b>3.57</b>	<b>3.99</b>	<b>4.25</b>		
	0.61	0.10	0.14	0.18	0.22	0.25	0.29	0.33	0.37	0.39	
30	<b>1.40</b>	<b>1.93</b>	<b>2.46</b>	<b>3.00</b>	<b>3.53</b>	<b>4.06</b>	<b>4.59</b>	<b>5.13</b>	<b>5.66</b>		
	0.76	0.13	0.18	0.23	0.28	0.33	0.38	0.43	0.48	0.53	
36	<b>1.71</b>	<b>2.36</b>	<b>3.01</b>	<b>3.66</b>	<b>4.31</b>	<b>4.96</b>	<b>5.61</b>	<b>6.26</b>	<b>6.67</b>		
	0.91	0.16	0.22	0.28	0.34	0.40	0.46	0.52	0.58	0.62	
42	<b>2.02</b>	<b>2.79</b>	<b>3.56</b>	<b>4.33</b>	<b>5.10</b>	<b>5.86</b>	<b>6.63</b>	<b>7.40</b>	<b>7.88</b>		
	1.07	0.19	0.26	0.33	0.40	0.47	0.54	0.62	0.69	0.73	
48	<b>2.33</b>	<b>3.22</b>	<b>4.10</b>	<b>4.99</b>	<b>5.88</b>	<b>6.71</b>	<b>7.65</b>	<b>8.54</b>	<b>9.10</b>		
	1.22	0.22	0.30	0.38	0.46	0.55	0.63	0.71	0.79	0.85	
54	<b>2.64</b>	<b>3.65</b>	<b>4.65</b>	<b>5.66</b>	<b>6.66</b>	<b>7.67</b>	<b>8.68</b>	<b>9.68</b>	<b>10.31</b>		
	1.37	0.25	0.34	0.43	0.53	0.62	0.71	0.81	0.90	0.96	
60	<b>2.93</b>	<b>4.04</b>	<b>5.28</b>	<b>6.52</b>	<b>7.77</b>	<b>9.01</b>	<b>10.25</b>	<b>11.49</b>	<b>12.74</b>		
	1.52	0.23	0.34	0.44	0.55	0.65	0.76	0.86	0.97	1.07	
66	<b>3.24</b>	<b>4.44</b>	<b>5.78</b>	<b>7.11</b>	<b>8.45</b>	<b>9.79</b>	<b>11.13</b>	<b>12.47</b>	<b>13.81</b>		
	1.68	0.26	0.38	0.49	0.61	0.72	0.84	0.95	1.07	1.18	
72	<b>3.55</b>	<b>4.84</b>	<b>6.29</b>	<b>7.77</b>	<b>9.24</b>	<b>10.72</b>	<b>12.20</b>	<b>13.68</b>	<b>15.16</b>		
	1.83	0.28	0.41	0.54	0.66	0.79	0.92	1.04	1.17	1.30	
78	<b>3.86</b>	<b>5.24</b>	<b>6.79</b>	<b>8.39</b>	<b>9.98</b>	<b>11.58</b>	<b>13.18</b>	<b>14.78</b>	<b>16.37</b>		
	1.98	0.31	0.45	0.58	0.72	0.86	1.00	1.13	1.27	1.41	
84	<b>4.17</b>	<b>5.65</b>	<b>7.29</b>	<b>8.99</b>	<b>10.72</b>	<b>12.44</b>	<b>14.16</b>	<b>15.87</b>	<b>17.59</b>		
	2.13	0.33	0.48	0.63	0.78	0.93	1.08	1.22	1.37	1.52	
90	<b>4.48</b>	<b>6.05</b>	<b>7.80</b>	<b>9.61</b>	<b>11.46</b>	<b>13.30</b>	<b>15.13</b>	<b>16.97</b>	<b>18.80</b>		
	2.29	0.36	0.52	0.68	0.84	1.00	1.16	1.32	1.47	1.63	
96	<b>4.79</b>	<b>6.46</b>	<b>8.36</b>	<b>10.31</b>	<b>12.30</b>	<b>14.34</b>	<b>16.41</b>	<b>18.48</b>	<b>20.54</b>		
	2.44	0.38	0.55	0.72	0.89	1.06	1.24	1.41	1.58	1.75	
102	<b>5.10</b>	<b>6.87</b>	<b>8.99</b>	<b>11.25</b>	<b>13.64</b>	<b>16.07</b>	<b>18.54</b>	<b>21.01</b>	<b>23.48</b>		
	2.59	0.41	0.59	0.77	0.95	1.13	1.32	1.50	1.68	1.86	
108	<b>5.41</b>	<b>7.38</b>	<b>9.69</b>	<b>12.14</b>	<b>14.77</b>	<b>17.53</b>	<b>20.32</b>	<b>23.11</b>	<b>25.90</b>		
	2.74	0.43	0.63	0.82	1.01	1.20	1.39	1.59	1.78	1.97	
114	<b>5.72</b>	<b>7.95</b>	<b>10.47</b>	<b>13.24</b>	<b>16.25</b>	<b>19.40</b>	<b>22.68</b>	<b>26.06</b>	<b>29.44</b>		
	2.90	0.46	0.66	0.86	1.07	1.27	1.47	1.68	1.88	2.08	
120	<b>6.03</b>	<b>8.16</b>	<b>10.91</b>	<b>13.90</b>	<b>17.12</b>	<b>20.57</b>	<b>24.16</b>	<b>27.79</b>	<b>31.41</b>		
	3.05	0.40	0.62	0.83	1.05	1.26	1.47	1.69	1.90	2.20	
126	<b>6.34</b>	<b>8.67</b>	<b>11.64</b>	<b>14.85</b>	<b>18.38</b>	<b>22.14</b>	<b>26.03</b>	<b>29.96</b>	<b>33.88</b>		
	3.20	0.42	0.65	0.87	1.10	1.32	1.55	1.77	2.00	2.31	
132	<b>6.65</b>	<b>9.18</b>	<b>12.31</b>	<b>15.84</b>	<b>19.65</b>	<b>23.78</b>	<b>27.94</b>	<b>32.14</b>	<b>36.34</b>		
	3.35	0.44	0.68	0.92	1.15	1.39	1.62	1.86	2.10	2.42	
138	<b>6.96</b>	<b>9.69</b>	<b>13.04</b>	<b>16.45</b>	<b>20.76</b>	<b>25.19</b>	<b>29.84</b>	<b>34.53</b>	<b>39.22</b>		
	3.51	0.46	0.71	0.96	1.21	1.45	1.70	1.95	2.20	2.54	
144	<b>7.27</b>	<b>10.20</b>	<b>13.87</b>	<b>17.78</b>	<b>22.19</b>	<b>26.99</b>	<b>32.08</b>	<b>37.37</b>	<b>42.66</b>		
	3.66	0.48	0.74	1.00	1.26	1.52	1.78	2.03	2.29	2.65	
150	<b>7.58</b>	<b>10.71</b>	<b>14.70</b>	<b>19.11</b>	<b>24.02</b>	<b>29.33</b>	<b>34.94</b>	<b>40.55</b>	<b>46.16</b>		
	3.81	0.51	0.77	1.04	1.31	1.58	1.85	2.12	2.39	2.76	
156	<b>7.89</b>	<b>11.22</b>	<b>15.73</b>	<b>20.64</b>	<b>26.15</b>	<b>32.16</b>	<b>38.47</b>	<b>45.08</b>	<b>51.69</b>		
	3.96	0.53	0.81	1.09	1.37	1.65	1.93	2.21	2.49	2.87	
162	<b>8.20</b>	<b>11.73</b>	<b>16.86</b>	<b>22.37</b>	<b>28.48</b>	<b>35.19</b>	<b>42.30</b>	<b>49.71</b>	<b>57.32</b>		
	4.11	0.55	0.84	1.13	1.42	1.71	2.00	2.29	2.59	2.99	
168	<b>8.51</b>	<b>12.24</b>	<b>18.19</b>	<b>24.40</b>	<b>31.31</b>	<b>38.92</b>	<b>47.13</b>	<b>55.74</b>	<b>64.65</b>		
	4.27	0.57	0.87	1.17	1.47	1.78	2.08	2.38	2.68	3.10	
174	<b>8.82</b>	<b>12.75</b>	<b>19.42</b>	<b>26.13</b>	<b>33.44</b>	<b>41.55</b>	<b>50.36</b>	<b>59.57</b>	<b>69.18</b>		
	4.42	0.59	0.90	1.21	1.53	1.84	2.15	2.47	2.78	3.21	
180	<b>9.13</b>	<b>13.26</b>	<b>20.85</b>	<b>28.16</b>	<b>36.27</b>	<b>45.18</b>	<b>54.79</b>	<b>64.80</b>	<b>75.21</b>		
	4.57	0.49	0.81	1.14	1.46	1.78	2.11	2.43	2.76	3.32	

Upper Numerals English Units/Lower Numerals Metric Units