PS.TRDL.0726

Traditional Louvers

Traditional louvers offer high free area and high air flow with a low pressure drop. Chose non-drainable models for when water mitigation is not a concern. These economical louvers come in a variety of blade and frame styles.

Advantages

- Economical
- High free area
- Low pressure drop
- Continuous line configurations available

Applications

- Intake and exhaust applications requiring high free area
- Building envelope customization with non-functioning louvers

Finish Options

Kynar & Powder Coat | Pearlescent & Metallic | Woodgrain Patterns | Clear Anodized | Custom Color

See all finish options online at c-sgroup.com.

Warranty

- 1-year material warranty
- 20-year finish warranty (excludes anodized)
- 10-year finish warranty woodgrain



Model A6080

View 3D Model →

©2026 Construction Specialties, Inc.

Traditional Louvers

Product Details


MODEL	LOUVER DEPTH	BLADE SPACING
1302†	1⅜" (34.9mm)	3/4" (19.1mm)
A4080 / A4085	4" (101.6mm)	4" (101.6mm)
A6080 / A6085	6" (152.4mm)	6" (152.4mm)

Certifications/Testing*

- AMCA 500L for Point of Beginning Water Penetration and Air Performance
- †Tested in Accordance with AMCA

For model specific certifications, listing and testing - refer to the Performance Chart on our **Architectural Louvers Product Guide.*

Models

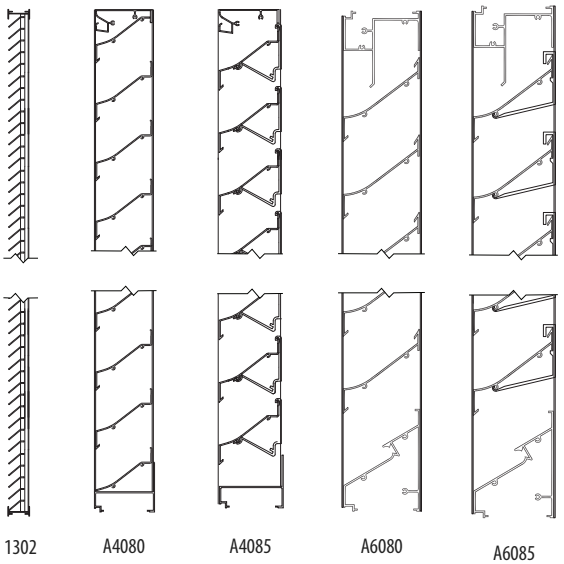

Learn More →

©2026 Construction Specialties, Inc.