



STEEL LOUVER - MODEL GS-610 (HINGED)

16GA. CLOSURE (HEAD & SILL) (SHOP ATTACHED)
 PROD NOTE: CLOSE OFF ALL OPENINGS AT HEAD, SILL & JAMBS AS REQUIRED

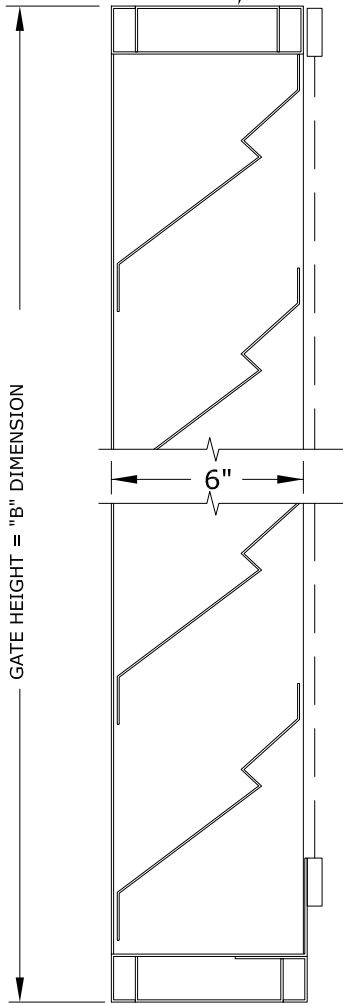

GATE VERTICAL SECTION

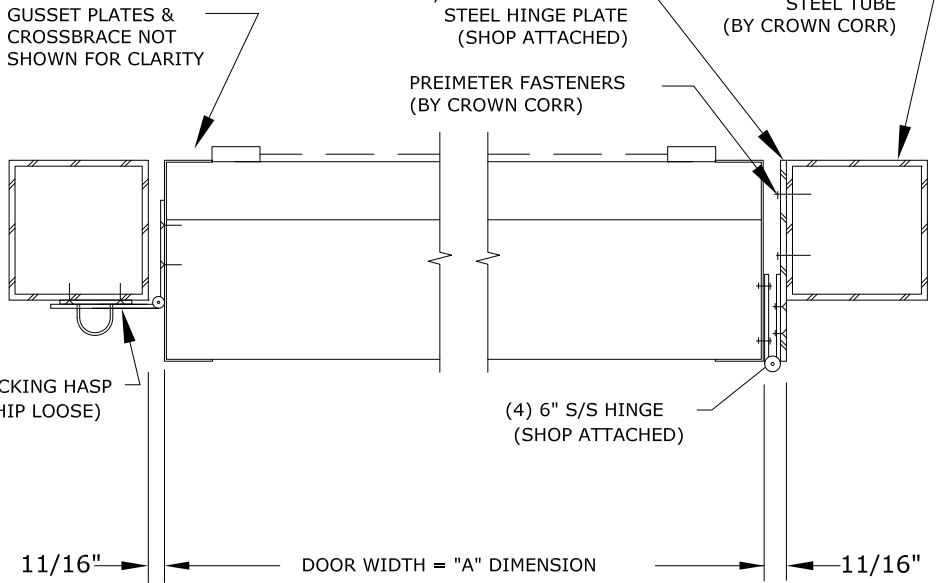

GATE PLAN SECTION

LOCKING HASP (SHIP LOOSE)

GUSSET PLATES & CROSSBRACE NOT SHOWN FOR CLARITY

3/16"x6" CONT. GALV. STEEL HINGE PLATE (SHOP ATTACHED)

4"x4"x 3/16" GALV. STEEL TUBE (BY CROWN CORR)

PREIMETER FASTENERS (BY CROWN CORR)

(4) 6" S/S HINGE (SHOP ATTACHED)

FRAMES	BLADES
<input type="checkbox"/> 16ga.	<input type="checkbox"/> 16ga.
<input type="checkbox"/> 18ga.	<input type="checkbox"/> 18ga.
<input type="checkbox"/> 20ga.	<input type="checkbox"/> 20ga.

SCREENS

- SCREEN NOT REQUIRED
- SCREEN REQUIRED
- INTERIOR MOUNTED
- EXTERIOR MOUNTED
- BIRDSCREEN TO BE 1/2" INTERCRIMPED MESH .063 DIA. STAINLESS STEEL WIRE
- INSECT SCREEN (18x16 MESH ALUM.)

FINISHES

- STANDARD MILL
- FLUOROPOLYMER POWDER COAT (NOT AVAILABLE IN 600XL OR 700)
- KYNAR (500),(600XL)or(700)
- (1) OF C/S STD. COLORS
- CUSTOM COLOR, C/S REQUIRES A COLOR CHIP FOR MATCHING
- OTHER _____

C/S FORMED FIXED STEP BLADE LOUVER MODEL GS-610.
 FRAMES AND BLADES TO BE FABRICATED FROM GALVANNEALED SHEET, THICKNESS AS SELECTED.
 UNLESS SPECIFIED ABOVE, STANDARD BLADE THICKNESS TO BE 18ga.
 ALL WELDED CONSTRUCTION.

ALL FASTENERS TO BE STAINLESS STEEL

UN-SUPPORTED BLADE LENGTH = @ PSF

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	LOCATION	REMARKS
						CKD. BY:
Construction Specialties, Inc. 49 Meeker Avenue Cranford, New Jersey 07016 (908) 272-5200 Fax (908) 272-6038						DRAWN BY:
PROJECT:						DATE:
CUSTOMER:						DWG. NO:
ARCH'T:						SHEET OF
AGENT:						