

## Blast-Resistant Louvers

When the heightened design of an exterior façade calls for protection from external blasts, Blast-Resistant Louvers are designed to withstand blasts up to a 12 PSI load.

### Advantages

- Designed to meet building specific blast requirements without compromising architectural appearance
- Enhanced structural integrity, components and installation methods allow the louver to be engineered to meet industry required blast protection
- Engineering and blast calculations provided by a registered engineer in the project state

### Applications

- Threat-vulnerable structures where blast resistance and defense are specified
- Power Plants
- Government Buildings
- Military Buildings
- Embassies
- Data Centers & Mission Critical Facilities
- VA Medical Centers



Model BLH-5709



[View 3D Model](#) →

# Blast-Resistant Louvers

## Finish Options



See all finish options online at [c-sgroup.com](http://c-sgroup.com).

## Product Details

MODEL	LOUVER DEPTH	BLADE SPACING	BLADE ORIENTATION
BL-4089	4" (101.6mm)	4" (101.6mm)	Horizontal
BL-4179	4" (101.6mm)	3¼" (82.55mm)	
BLH-5709	5" (127.0mm)	2" (50.8mm)	
BL-6089	6" (152.4mm)	6" (152.4mm)	
BL-6179	6" (152.4mm)	5¾" (146.1mm)	
BL-7709	7" (177.8mm)	3⅞" (79.4mm)	
BL-5609	5" (127.0mm)	1" (25.4mm)	Vertical
BLV-5709	5" (127.0mm)	2" (50.8mm)	
BL-5809	5" (127.0mm)	1½" (38.1mm)	

## Certifications/Testing\*


- AMCA Certified

\*For model specific certifications, listing and testing - refer to the Performance Chart on our *Architectural Louvers Product Guide*.

## Warranty

- 1-year Material Warranty
- 20-year Finish Warranty (excludes anodized)
- 10-year Finish Warranty Wood Grain



## Models

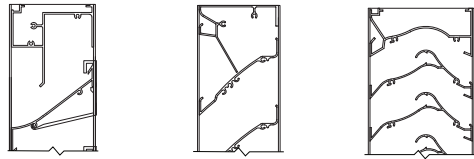

BL-4089

BL-4179



BLH-5709

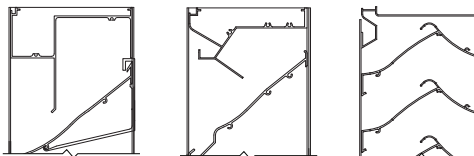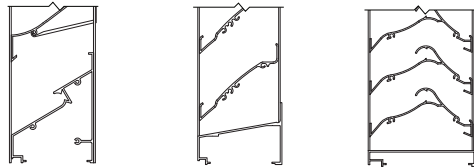


BL-6089

BL-6179


BL-7709

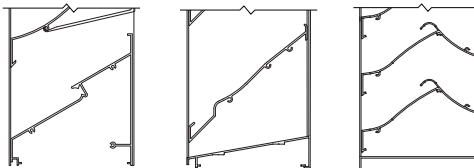

BL-5609



BLV-5709



BL-5809



Learn More →