

GYMF & GYMC


TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

Standard Loading

- 500 lbs.

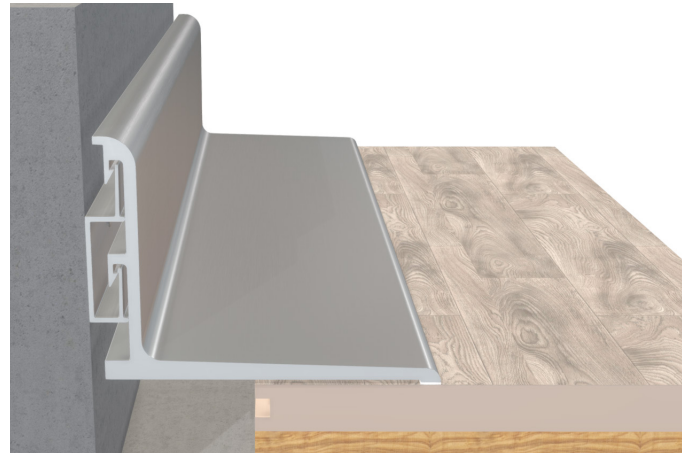

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
GYMF-100	1.00" (25mm)	0.00" (0mm)	4.25" (108mm)	6.00" (152mm)	N/A	N/A
GYMF-200	2.00" (51mm)	0.00" (0mm)	4.25" (108mm)	6.00" (152mm)	N/A	N/A
GYMC-100	1.00" (25mm)	0.00" (0mm)	4.06" (103mm)	4.19" (106mm)	N/A	N/A
GYMC-200	2.00" (51mm)	0.00" (0mm)	4.06" (103mm)	4.19" (106mm)	N/A	N/A

