

RJT & RJTW

TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

Duroflex Gasket


- Single Durometer – 85 Shore A, ASTM D2000
- Color – Gray

Vapor Barrier

- Material: 7-Ply Polyethylene, ASTM-E-1745-11
- Color: Black
- 3" Tensile Strength: 275 lbs., ASTM-D-882
- Puncture Strength: 79 lbs., ASTM-D-4833
- PPT Resistance: 62 lbs., ASTM-D-2582

Turnbar

- Injection Molded

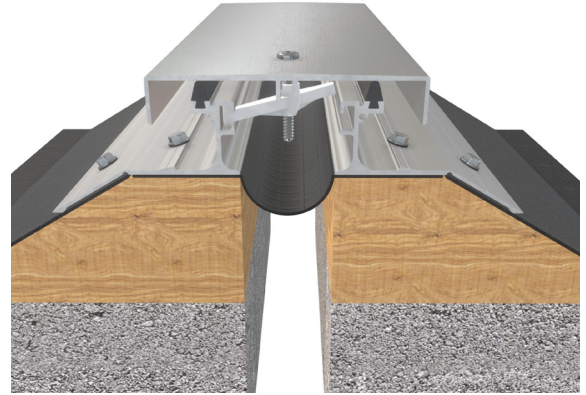

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
RJT-100	1.00" (25mm)	0.13" (3mm)	2.63" (67mm)	5.75" (146mm)	N/A	N/A
RJT-200	2.00" (51mm)	0.13" (3mm)	3.63" (92mm)	5.75" (146mm)	N/A	N/A
RJTW-100	1.00" (25mm)	0.13" (3mm)	2.38" (60mm)	3.88" (99mm)	N/A	N/A
RJTW-200	2.00" (51mm)	0.13" (3mm)	2.88" (73mm)	3.88" (99mm)	N/A	N/A

