


SSR 5" & Up Series

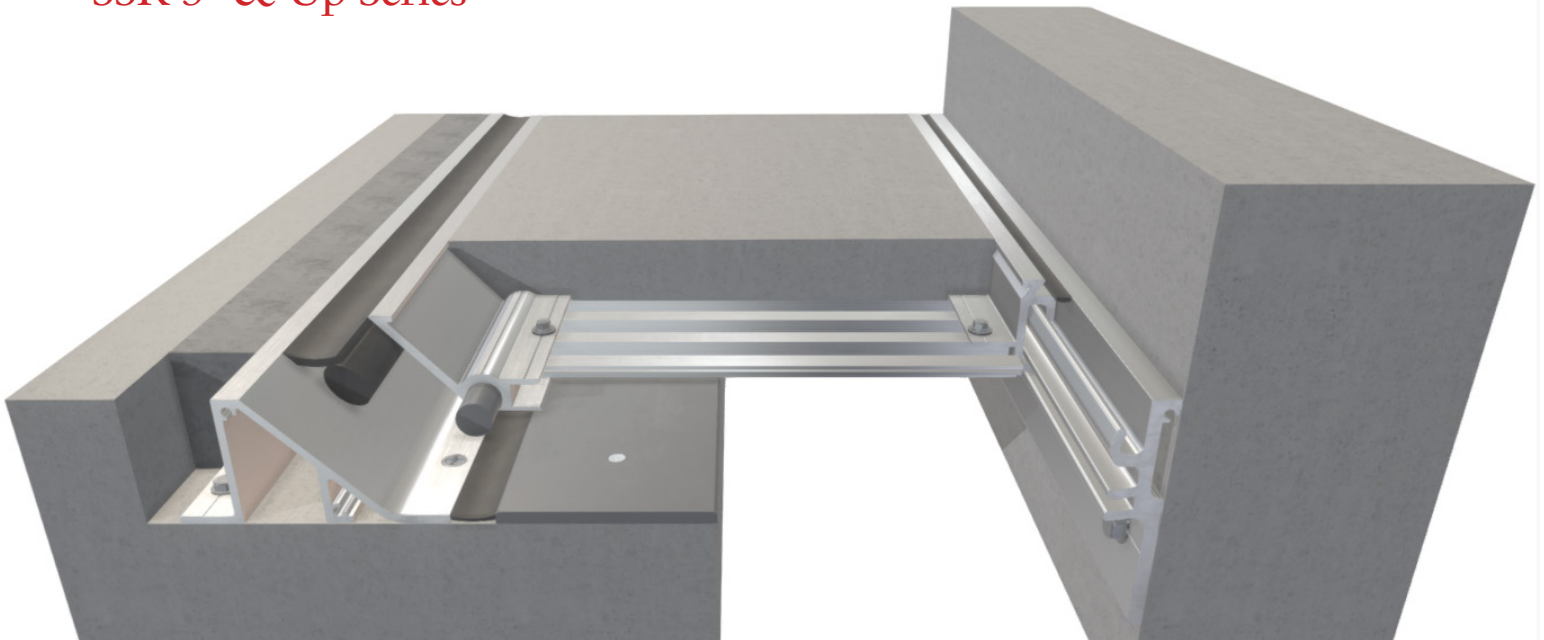

Model SSRW-800

This pan-style floor cover is designed for interior and exterior applications where seismic movement occurs. The side caulk joints expand and contract during thermal movement, and during a seismic event the center pan assembly lifts up as needed and returns to nominal position after the event. The unique system offers a minimal sightline due to the center pan's ability to accept a variety of floor finishes.

Advantages

- Center pan accepts a variety of flooring up to 1 ½" thick
- Self-centering system
- Accommodates a variety of movement requirements, including vertical
- Accommodates a variety of loading requirements
- Highly customizable system

[View 3D Model →](#)

SSR 5" & Up Series

Product Details

- Joint sizes range from 5" to 24" (127mm to 609.6mm)
- 10' (304.8cm) stock lengths
- Standard loading up to 500 lbs
- Heavy-duty systems available for limited vehicular access
- Meets ASTM E1399



ADA Compliant



Vapor Barrier



Fire Barrier

Standard Finish



Mill


Aluminum in contact with concrete/masonry will have a 2 mil heavy metal free high solids primer

See all finish options online at c-sgroup.com.


Warranty

- Standard Five-Year Warranty

Model Details



Floor to Floor



Floor to Wall

| MODEL | FLOOR TO FLOOR | FLOOR TO WALL |
|-------|----------------|---------------|
| SSR | • | |
| SSRW | | • |



Learn More →