

ALR & ALRW

TECHNICAL DATA:

Aluminum


- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

Standard Loading

- 500 lbs.



Capable of Lateral Movement

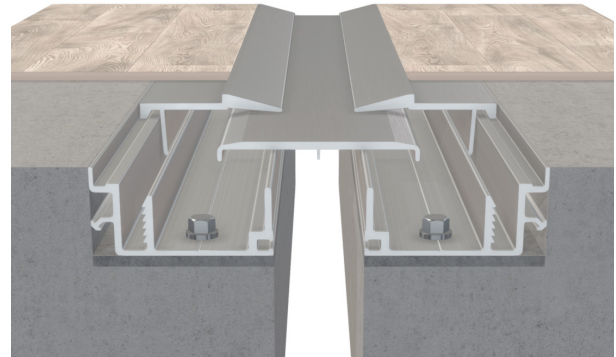

| MODEL | JOINT WIDTH | MINIMUM OPENING | MAXIMUM OPENING | EXPOSED SURFACE | BLOCKOUT WIDTH | BLOCKOUT HEIGHT |
|----------|---------------|-----------------|-----------------|-----------------|----------------|-----------------|
| ALR-100 | 1.00" (25mm) | 0.00" (0mm) | 2.25" (57mm) | 2.65" (67mm) | 2.00" (51mm) | 1.00" (25mm) |
| ALR-200 | 2.00" (51mm) | 0.00" (0mm) | 4.00" (102mm) | 3.65" (93mm) | 2.88" (73mm) | 1.00" (25mm) |
| ALR-300 | 3.00" (76mm) | 0.88" (22mm) | 6.00" (152mm) | 5.44" (138mm) | 3.88" (99mm) | 1.00" (25mm) |
| ALR-400 | 4.00" (102mm) | 0.88" (22mm) | 7.00" (178mm) | 6.44" (164mm) | 3.88" (99mm) | 1.00" (25mm) |
| ALRW-100 | 1.00" (25mm) | 0.50" (13mm) | 1.69" (43mm) | 1.81" (46mm) | 2.00" (51mm) | 1.00" (25mm) |
| ALRW-200 | 2.00" (51mm) | 1.00" (25mm) | 3.00" (76mm) | 2.81" (71mm) | 2.88" (73mm) | 1.00" (25mm) |
| ALRW-300 | 3.00" (76mm) | 1.44" (37mm) | 4.56" (116mm) | 4.19" (106mm) | 3.88" (99mm) | 1.00" (25mm) |
| ALRW-400 | 4.00" (102mm) | 2.44" (62mm) | 5.50" (140mm) | 5.19" (132mm) | 3.88" (99mm) | 1.00" (25mm) |

