

APF Series

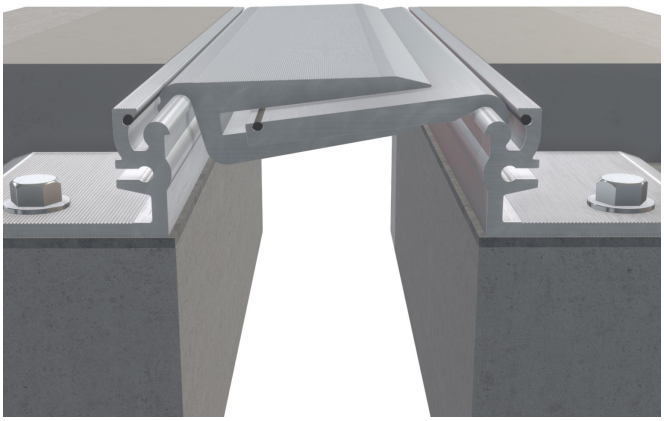



TECHNICAL DATA:

Aluminum:

- Aluminum
- CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts.
- Extrusion - 6063-T5, T6, T52, 6061-T5, T6, T51, 6105-T5, T6, 6005-T5, 6005A-T5, T61, ASTM B221

Loading:

- Forklifts with full or pneumatic tyres of a permissible total weight equal to 16,000 lbs. (7,257 kgs).
- Trucks with pneumatic tyres of a permissible total weight equal to 67,000 lbs. (30.39 Tonnes).
- Vehicles and goods handling trucks with tyres of hard plastics.
- The permissible load dependent on tyre width is 15 lbs. (6.8kgs) per every mm of tyre width.


Frame Heights:

- 1/2" or 1" (12.7mm - 25.4mm) for 1" (25.4 mm) model
- 1½" or 2" (38.1mm or 50.4mm) for 2" - 6" (50.8mm - 152.4mm) models


MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	VERTICAL MOVEMENT	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
APF-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.70" (43mm)	+/-0.2" (+/-5mm)	2.5" (64mm)	13mm/25mm
APF-200	2.00" (51mm)	1.63" (41mm)	2.38" (60mm)	3.30" (84mm)	+/-0.4" (+/-10mm)	3.75" (96mm)	38mm
APF-400	4.00" (102mm)	3.25" (83mm)	4.75" (121mm)	5.28" (134mm)	+/-0.7" (+/-18mm)	3.75" (96mm)	38mm
APF-600	6.00" (152mm)	4.50" (114mm)	7.50" (191mm)	7.34" (186mm)	+/-1.18" (+/-30mm)	3.75" (96mm)	51mm
APFW-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.70" (43mm)	+/-0.2" (+/-5mm)	2.2" (56mm)	13mm/25mm
APFW-200	2.00" (51mm)	1.63" (41mm)	2.38" (60mm)	3.30" (84mm)	+/-0.4" (+/-10mm)	4.5" (115mm)	38mm
APFW-400	4.00" (102mm)	3.25" (83mm)	4.75" (121mm)	5.28" (134mm)	+/-0.7" (+/-18mm)	4.5" (115mm)	38mm
APFW-600	6.00" (152mm)	4.50" (114mm)	7.50" (191mm)	7.34" (186mm)	+/-1.18" (+/-30mm)	4.5" (115mm)	51mm

Australia Phone: 1.300.272.602
Fax: 1.300.247.407 Email: sales@c-sgroup.com.au
c-sgroup.com.au
©2026 Construction Specialties, Inc.

APF Series

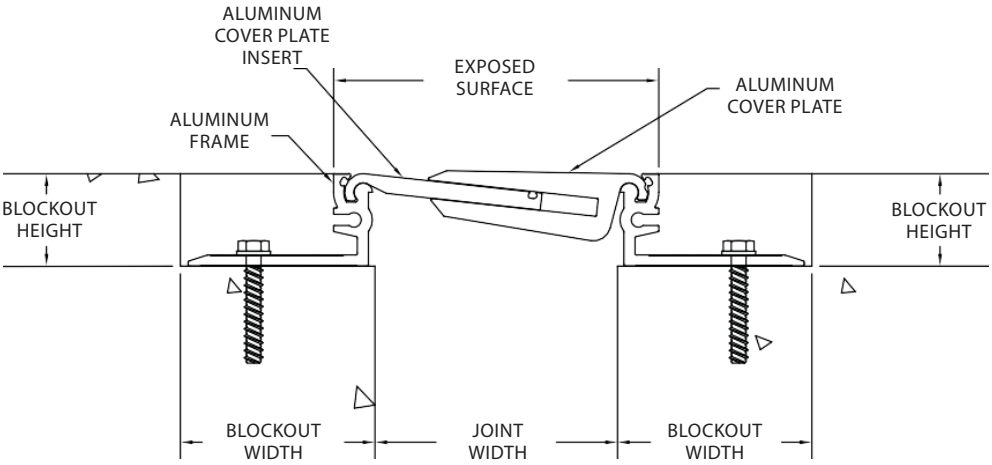

APF

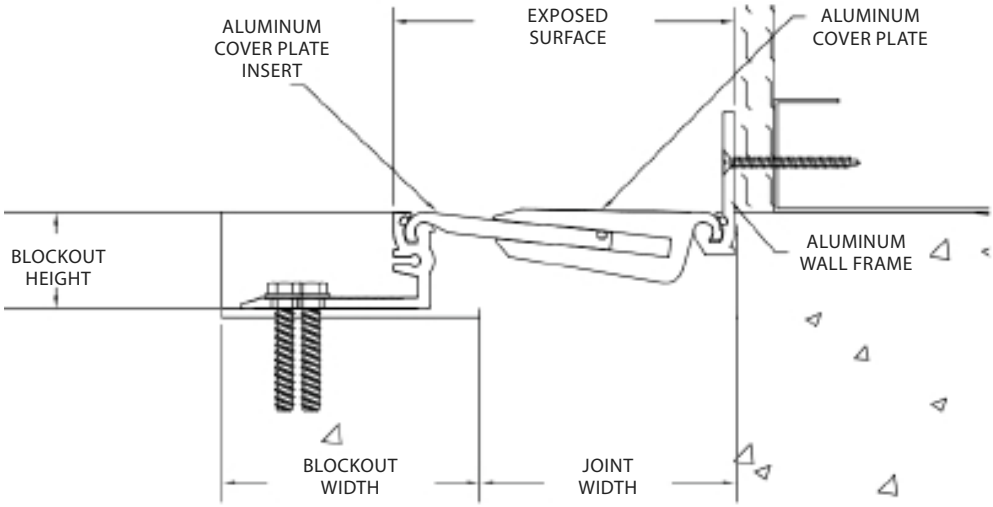

APFW

©2026 Construction Specialties, Inc.