


6" OPERATING MULLION LOUVER MODEL 6870

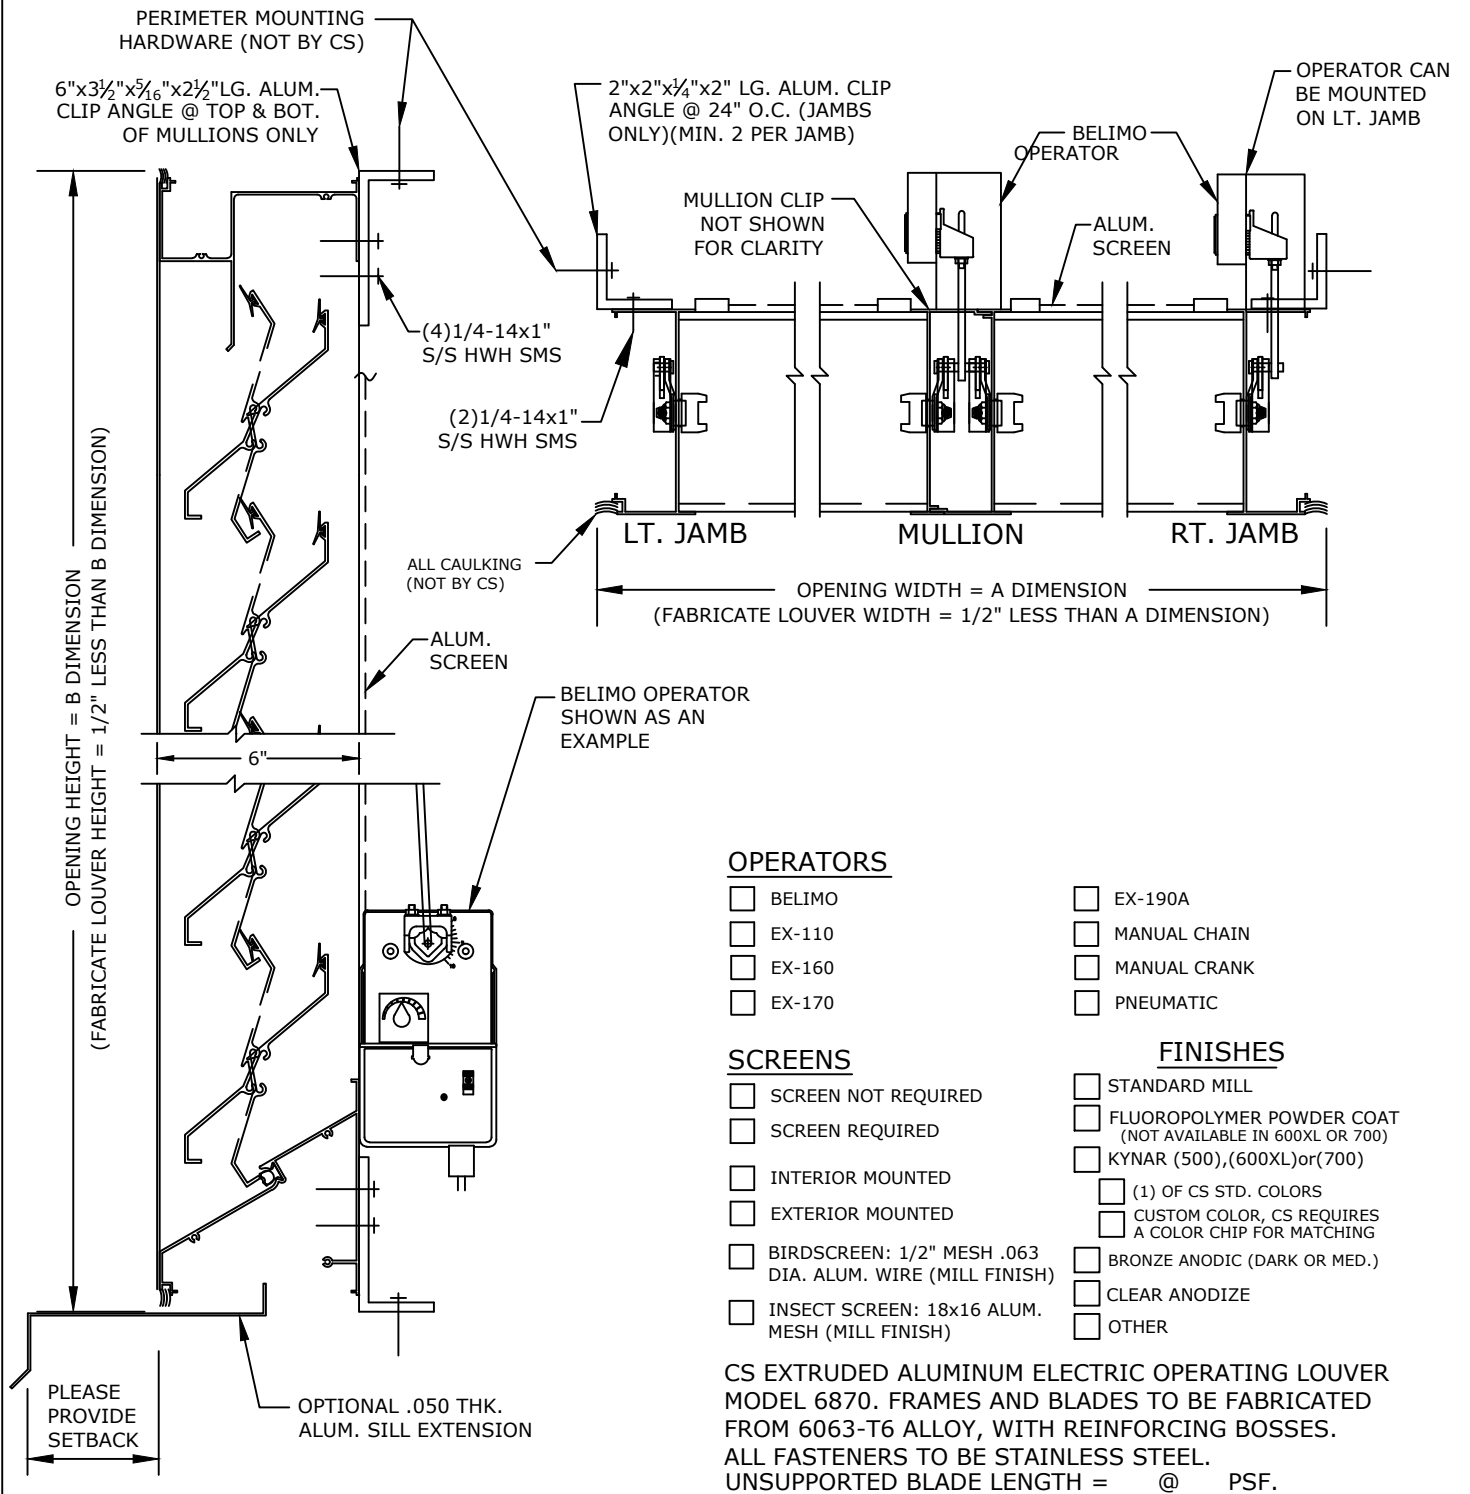

OPERATORS

- BELIMO
- EX-110
- EX-160
- EX-170
- EX-190A
- MANUAL CHAIN
- MANUAL CRANK
- PNEUMATIC

SCREENS

- SCREEN NOT REQUIRED
- SCREEN REQUIRED
- INTERIOR MOUNTED
- EXTERIOR MOUNTED
- BIRDSCREEN: 1/2" MESH .063 DIA. ALUM. WIRE (MILL FINISH)
- INSECT SCREEN: 18x16 ALUM. MESH (MILL FINISH)

FINISHES

- STANDARD MILL
- FLUOROPOLYMER POWDER COAT (NOT AVAILABLE IN 600XL OR 700)
- KYNAR (500),(600XL)or(700)
 - (1) OF CS STD. COLORS
 - CUSTOM COLOR, CS REQUIRES A COLOR CHIP FOR MATCHING
- BRONZE ANODIC (DARK OR MED.)
- CLEAR ANODIZE
- OTHER

CS EXTRUDED ALUMINUM ELECTRIC OPERATING LOUVER MODEL 6870. FRAMES AND BLADES TO BE FABRICATED FROM 6063-T6 ALLOY, WITH REINFORCING BOSSES. ALL FASTENERS TO BE STAINLESS STEEL. UNSUPPORTED BLADE LENGTH = @ PSF.

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	OPERATOR LOCATION	LOUVER LOCATION	REMARKS
							CKD. BY:

Construction Specialties, Inc.
 3 Werner Way
 Lebanon, New Jersey 08833
 (800) 233-8493

PROJECT:	DRAWN BY:
CUSTOMER:	DATE:
ARCH'T:	DWG. NO:
AGENT:	SHEET OF