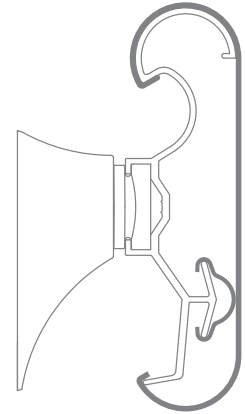# HRB-4C

Model HRB-4C shown
with optional vertical reveal

These industry standard Acrovyn® handrails offer the protection of a crash rail while providing the secure grip required of a handrail. The rail's Quick Lock™ mounting feature decreases installation time by 50%.

Advantages

- Variety of finish and functional options to meet any specific design need
- Durable, easy to clean Acrovyn is perfect for high-traffic areas
- Substantial securing of splice & end cap
- Acrovyn Quick Lock™ mounting brackets allow for quick and easy install, perfect for already occupied areas.
- Behavioral health models feature a continuous aluminum retainer.

Building Segments

- Education
- Healthcare
- Office & Mixed Use
- Retail & Hospitality
- Senior Living

Learn More →

CS Construction Specialties®

Questions? Connect with a CS Representative.
c-sgroup.com/representative-locator

c-sgroup.com | 800.233.8493
©2025 Construction Specialties, Inc.

HRB-4C

Product Details

- 3" (76.2mm) wall offset
- .078" (1.98mm) thick Acrovyn® cover
- Continuous outside corners available*
- PVC-free Acrovyn in shadowgrain texture
- Optional vertical reveal (in 108 Black) available*
- Inside corners are available in Acrovyn solid colors
- Continuous Aluminum retainer
  (feat. PETG regrind cushion)*

Certifications/Testing

- Resistant to certain bacterial & fungal growth
  (per ASTM G 22-76 & G 21-96)
- Chemical resistant (per ASTM D 543)
- Impact resistant (per ASTM F 476-84)
- UL Class A/1 fire rated & labeled (Acrovyn models)
- Low VOC Emissions Certificate –
  Intertek Clean Air Gold (CDPH 01350 v1.2)

Warranty

- Acrovyn Limited Lifetime Warranty

*HRB-4C models only

Acrovyn Finish Options

Solid Colors   Woodgrains   Brushed Metals

See all finish options online at c-sgroup.com.

Handrail Bracket Options

BH Behavorial Health

HL Bariatric High Load

Quick Lock

Models listed as high load have been tested to withstand 1,000-pound peak loads for bariatric facilities.

Model Details

MODEL	HEIGHT	LENGTH MIN-MAX	MODEL FEATURES	RAMP TRANSITION	RADIUS
HRB-4C	5 ½" (139.7mm)	17" - 20' (431.8mm - 6.1m)	(Quick Lock)	●	●
HRB-4CCM	5 ½" (139.7mm)	17" - 20' (431.8mm - 6.1m)	BH		
HRB-4CHL	5 ½" (139.7mm)	17" - 20' (431.8mm - 6.1m)	HL	●	●
HRB-4CCMHL	5 ½" (139.7mm)	17" - 20' (431.8mm - 6.1m)	BH (Quick Lock) HL		

CS **Construction Specialties®**

Questions? Connect with a CS Representative.
c-sgroup.com/representative-locator

c-sgroup.com | 800.233.8493
©2025 Construction Specialties, Inc.