CHANNEL GUARD:

FINISH:_____

GAUGE:_____

TYPE:_____

CHANNEL GUARDS SUPPLIED IN STANDARD 16 GAUGE, TYPE #304 ALLOY WITH #4 SATIN FINISH.


OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED.

OPTIONAL GAUGE (14,18, 20) AND ALLOY TYPES (#316, #430) AVAILABLE. PLEASE ADVISE OPTIONAL GAUGE AND ALLOY TYPE IF REQUIRED.

UNITS REQ'D	UNIT HEIGHT	ANGLE	LEG LEN.	NOSE RAD.	WALL WIDTH

NOTES:

1. CHANNEL GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
2. CHANNEL GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm], PLEASE ADVISE IF A DIFFERENT ANGLE, LEG LENGTH OR NOSE RADIUS IS DESIRED.
3. CHANNEL GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm], A MINIMUM FINISHED WALL WIDTH OF 4-7/8" [123.8mm], AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
4. ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
5. *CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CHANNEL GUARD.*
6. FASTENERS ARE LOCATED 3" FROM TOP, 2-1/2" FROM BOTTOM ON 1 LEG AND 2-1/2" FROM TOP, 3" FROM BOTTOM ON OPPOSITE LEG. IF MORE THAN 2 FASTENERS ARE REQUIRED, FASTENERS WILL BE EQUALLY SPACED AT MAX 16" ON CENTER.

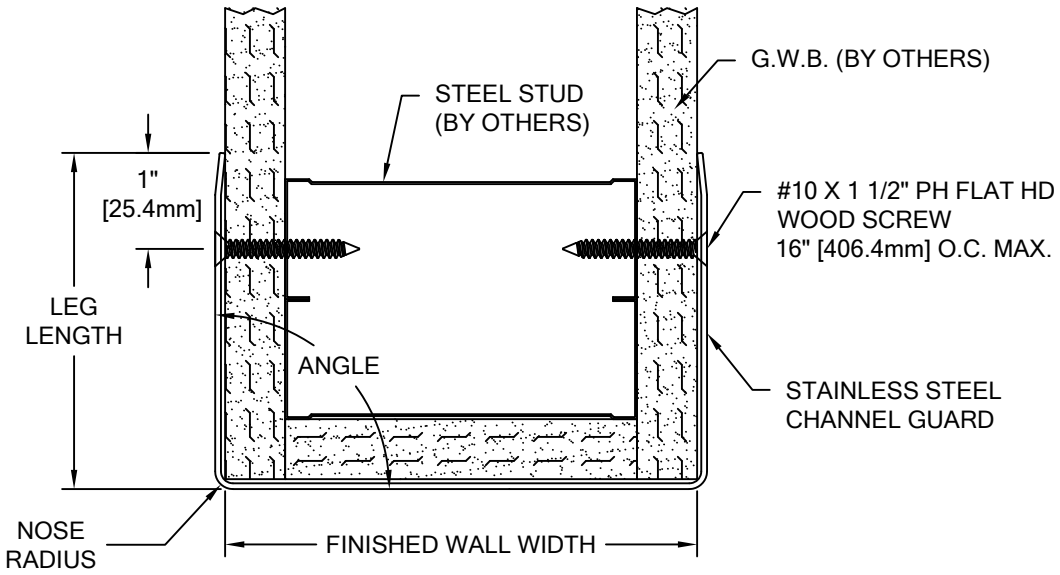

SCO-8 SERIES

CORNER GUARD

WITH FASTENERS

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART NUMBER
		WALL	RETAINER	
CONCRETE/CONCRETE BLOCK	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW AF-8 PLASTIC ANCHORS	1/4"	N/A	90H009002 90H049004
STEEL STUD/GYPSUM WALL	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW	1/8"	N/A	90H009002
WOOD STUD/GYPSUM WALL	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW	N/A	N/A	90H009002

Construction Specialties

Hughesville, PA | 800.233.8493 | 570.546.5941
Mississauga, ON | 888.895.8955 | 905.274.3611
www.c-sgroup.com

© Copyright 2022 Construction Specialties, Inc.

PROJECT:	**REVISION:**
JOB NO.:	**F&F:**
CUSTOMER:	
REP:	**DATE:**
DRAWN BY:	**SHEET NO:**