



| | | | | | | |
|---|-------------|-------------|-------|----------|-----------|------------|
| CHANNEL GUARD: FINISH: _____ GAUGE: _____ TYPE: _____ CHANNEL GUARDS SUPPLIED IN STANDARD 16 GAUGE, TYPE #304 ALLOY WITH #4 SATIN FINISH. OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED. OPTIONAL GAUGE (14, 18, 20) AND ALLOY TYPES (#316, #430) AVAILABLE. PLEASE ADVISE OPTIONAL GAUGE AND ALLOY TYPE IF REQUIRED. | UNITS REQ'D | UNIT HEIGHT | ANGLE | LEG LEN. | NOSE RAD. | WALL WIDTH |
| | | | | | | |
| | | | | | | |
| | | | | | | |

NOTES:

- CHANNEL GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
- CHANNEL GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm], PLEASE ADVISE IF A DIFFERENT ANGLE, LEG LENGTH OR NOSE RADIUS IS DESIRED.
- CHANNEL GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm], A MINIMUM FINISHED WALL WIDTH OF 4-7/8" [123.8mm], AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
- ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
- *CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CHANNEL GUARD.*
- FASTENERS ARE LOCATED 3" FROM TOP, 2-1/2" FROM BOTTOM ON 1 LEG AND 2-1/2" FROM TOP, 3" FROM BOTTOM ON OPPOSITE LEG. IF MORE THAN 2 FASTENERS ARE REQUIRED, FASTENERS WILL BE EQUALLY SPACED AT MAX 16" ON CENTER.

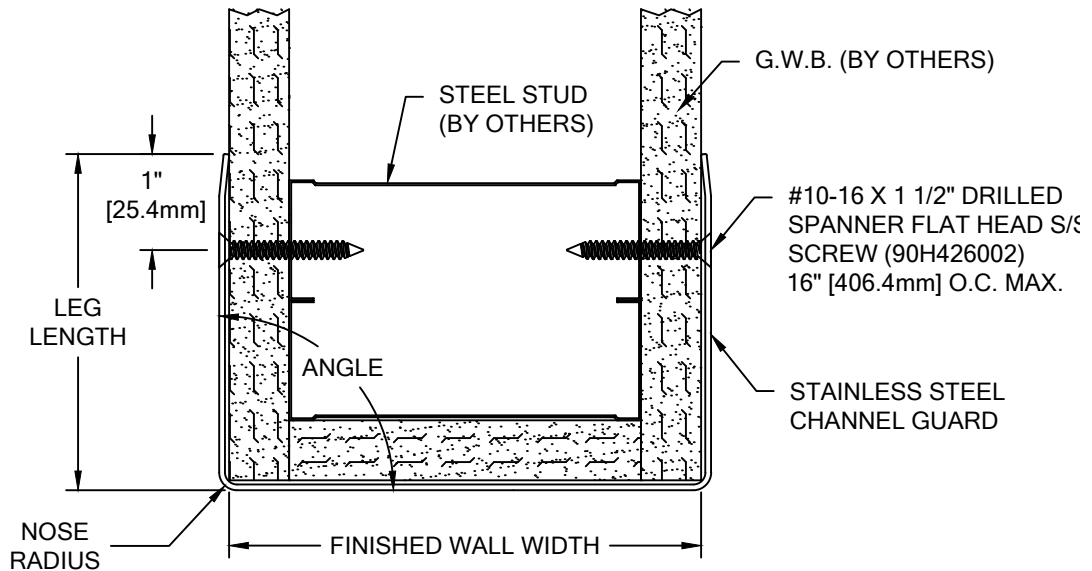

SCO-8 SERIES CORNER GUARD WITH TAMPER RESISTANT FASTENERS

| | | |
|---|-----------|-----------|
|  Hughesville, PA 800.233.8493 570.546.5941 Mississauga, ON 888.895.8955 905.274.3611 www.c-sgroup.com © Copyright 2022 Construction Specialties, Inc. | PROJECT: | REVISION: |
| | JOB NO.: | F&F: |
| | CUSTOMER: | |
| | REP: | DATE: |
| | DRAWN BY: | SHEET NO: |