


CHANNEL GUARD: FINISH: _____ GAUGE: _____ TYPE: _____ CHANNEL GUARDS SUPPLIED IN STANDARD 16 GAUGE, TYPE #304 ALLOY WITH #4 SATIN FINISH. OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED. OPTIONAL GAUGE (14,18, 20) AND ALLOY TYPES (#316, #430) AVAILABLE. PLEASE ADVISE OPTIONAL GAUGE AND ALLOY TYPE IF REQUIRED.	UNITS REQ'D	UNIT HEIGHT	ANGLE	LEG LEN.	NOSE RAD.	WALL WIDTH

NOTES:

1. CHANNEL GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
2. CHANNEL GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm], PLEASE ADVISE IF A DIFFERENT ANGLE, LEG LENGTH OR NOSE RADIUS IS DESIRED.
3. CHANNEL GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm], A MINIMUM FINISHED WALL WIDTH OF 4-7/8" [123.8mm], AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
4. ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
5. *CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CHANNEL GUARD.*
6. FASTENERS ARE LOCATED 3" FROM TOP, 2-1/2" FROM BOTTOM ON 1 LEG AND 2-1/2" FROM TOP, 3" FROM BOTTOM ON OPPOSITE LEG. IF MORE THAN 2 FASTENERS ARE REQUIRED, FASTENERS WILL BE EQUALLY SPACED AT MAX 16" ON CENTER.

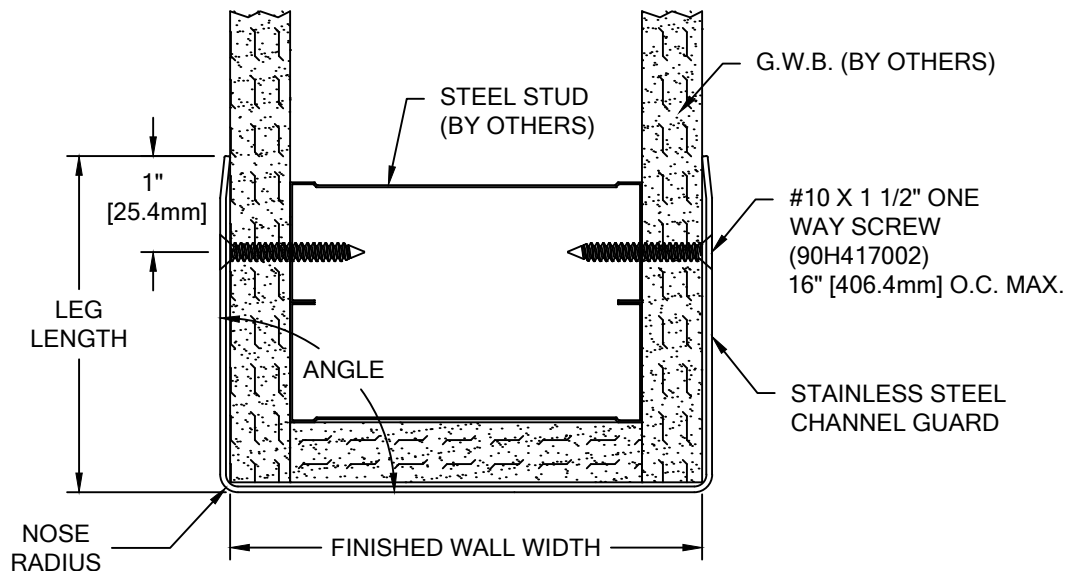

SCO-8 SERIES CORNER GUARD WITH TAMPER RESISTANT FASTENERS



Construction Specialties®

Hughesville, PA | 800.233.8493 | 570.546.5941
 Mississauga, ON | 888.895.8955 | 905.274.3611
www.c-sgroup.com

© Copyright 2022 Construction Specialties, Inc.

PROJECT:	REVISION:
JOB NO.:	F&F:
CUSTOMER:	
REP:	DATE:
DRAWN BY:	SHEET NO: