


**CHANNEL GUARD:**  
 FINISH: \_\_\_\_\_  
 GAUGE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 CHANNEL GUARDS SUPPLIED IN STANDARD 16 GAUGE, TYPE #304 ALLOY WITH #4 SATIN FINISH.  
 OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED.  
 OPTIONAL GAUGE (14, 18, 20) AND ALLOY TYPES (#316, #430) AVAILABLE. PLEASE ADVISE OPTIONAL GAUGE AND ALLOY TYPE IF REQUIRED.

UNITS REQ'D	UNIT HEIGHT	ANGLE	LEG LEN.	NOSE RAD.	WALL WIDTH

**NOTES:**

1. CHANNEL GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
2. CHANNEL GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm], PLEASE ADVISE IF A DIFFERENT ANGLE, LEG LENGTH OR NOSE RADIUS IS DESIRED.
3. CHANNEL GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm], A MINIMUM FINISHED WALL WIDTH OF 4-7/8" [123.8mm], AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
4. ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
5. \*CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CHANNEL GUARD.\*

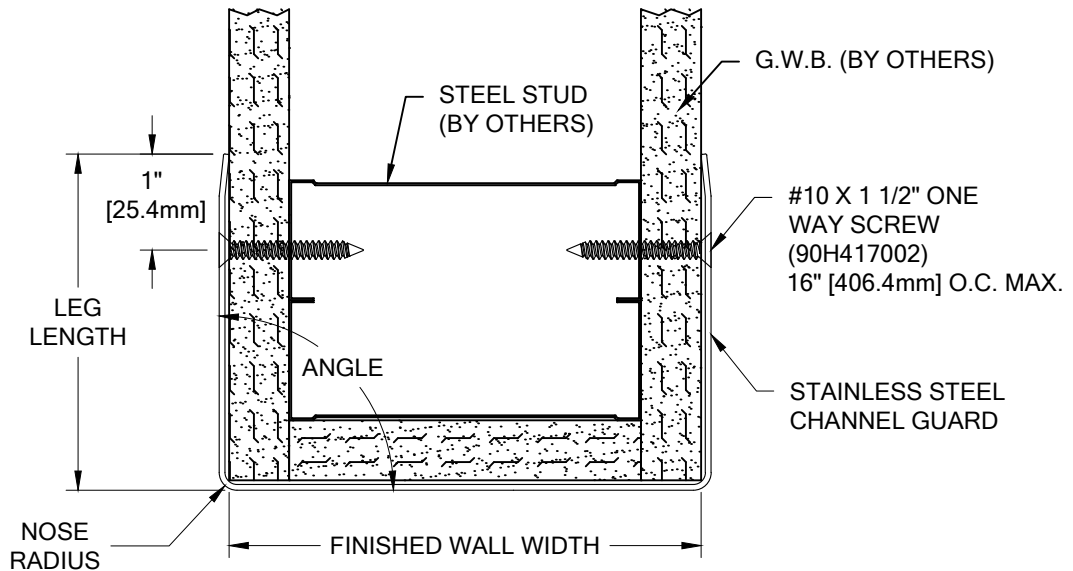

**SCO-8 SERIES  
 CORNER GUARD  
 WITH TAMPER RESISTANT FASTENERS**



Hughesville, PA | 800.233.8493 | 570.546.5941  
 Mississauga, ON | 888.895.8955 | 905.274.3611  
[www.c-sgroup.com](http://www.c-sgroup.com)  
 © Copyright 2018 Construction Specialties, Inc.

**PROJECT:** \_\_\_\_\_  
**JOB NO.:** \_\_\_\_\_  
**CUSTOMER:** \_\_\_\_\_  
**REP:** \_\_\_\_\_  
**DRAWN BY:** \_\_\_\_\_

**REVISION:** \_\_\_\_\_  
**F&F:** \_\_\_\_\_  
**DATE:** \_\_\_\_\_  
**SHEET NO:** \_\_\_\_\_