


Model DC-4174

4" (101.6 mm) Dade County Hurricane Louvre

NOA: 26-0330.05
Florida Product Approval: FL-21658
Maximum Design Windload 170 PSF (8 kPa)

Material:

Material:	6063-T6 Alloy
Nominal Thickness:	Heads: 0.060" (1.52 mm) Sills: 0.080" (2.03 mm) Jambes & Mullions: 0.125" (3.18 mm)
Nominal Blade Thickness:	0.070" (1.78 mm)
Additional Options (at additional cost):	Birdscreen: 0.5" (12.7 mm) welded stainless steel G304 mesh. Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Flange frames, Integrated glazing frames

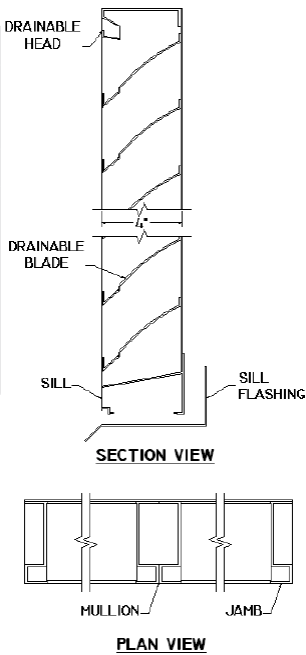

Test Summary:

For a 4 Foot by 4 Foot Unit (1219mm x 1219mm).

Tested with mill finish and no screen

- Free (throat) area = 8.80 ft² (0.82 m²)
- Percent free (throat) area = 55%
- Free (throat) area velocity at the point of beginning water penetration (@ 0.01oz. / ft² of free (throat) area based on a 15 minute interval test) = 1087 FPM (5.52 m/s)
- Intake pressure drop at 0.01 oz. / ft² free (throat) area velocity = 0.18 in. H₂O (44.7 Pa)

Discharge Coefficient

Intake Cd = 0.39 (Class 2)

AMCA certifies the coefficient class only

Construction Specialties Inc. certifies that the louvre model DC-4174 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.



Application and Design

DC-4174 is tested in accordance with AMCA 540 Test Method for Louvres Impacted by Wind Borne Debris (Basic Protection, Missile Level D). The DC-4174 is tested in accordance with AMCA 500-L Air Performance and Water Penetration.

Dade County Protocols:

- TAS-201: Large and small missile impact
- TAS-202: Criteria for testing impact and not impact resistant building envelope components using static uniform air pressure
- TAS-203: Criteria for testing products subject to cyclic wind pressure

Construction Specialties Inc. certifies that the louvre model DC-4174 shown herein is approved to bear the AMCA listing Label. Construction Specialties Inc. certifies that louvre model DC-4174 shown herein is approved for louvres with a minimum blade span of less than 305 mm (12 in) and a maximum unsupported blade span of 1219 mm (48 in).


The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA listing Label Program. The AMCA International Listing Label applies to wind borne debris impact resistant louvres rated for Basic Protection. The AMCA International listing Label applies to pressure cycle tested Wind-Borne Debris Impact Resistant Louvres rated for Basic Protection and +/- 8kPa (170 PSF).

Model DC-4174

4" (101.6 mm) Dade County Hurricane Louvre

Water Penetration Statement

AMCA defines the point of beginning water penetration as the free (throat) area velocity at which the AMCA water test has yielded 0.01 or less ounces of water per square foot of louvre free (throat) area during a

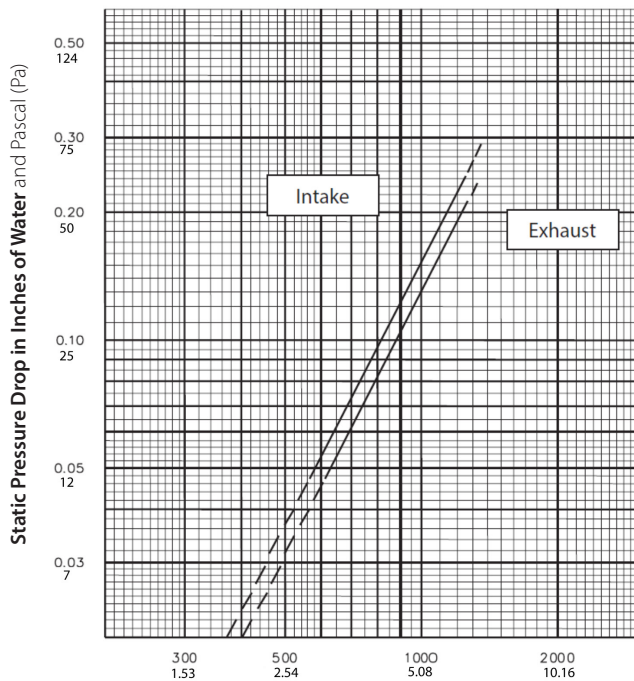

Free Air Velocity in Feet per minute and Metre per Second (m/s)

Data corrected to standard air density.

48" x 48" (121.92cm x 121.92cm) louvre tested to figure 5.5.

Free (throat) area Table (Free (throat) area in sq. feet and sq. metres)

For additional sizes, please visit:

Width in Inches and Metres									
	18	24	30	36	42	48	54	60	
	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	
18	0.91	1.25	1.60	1.95	2.29	2.51	2.86	3.20	
0.46	0.08	0.12	0.15	0.18	0.21	0.23	0.27	0.30	
24	1.30	1.80	2.29	2.79	3.28	3.59	4.09	4.59	
0.61	0.12	0.17	0.21	0.26	0.31	0.33	0.38	0.43	
30	1.79	2.47	3.15	3.83	4.52	4.94	5.62	6.30	
0.76	0.17	0.23	0.29	0.36	0.42	0.46	0.52	0.59	
36	2.28	3.14	4.01	4.88	5.75	6.29	7.16	8.02	
0.91	0.21	0.29	0.37	0.45	0.53	0.58	0.66	0.75	
42	2.76	3.81	4.86	5.91	6.97	7.62	8.67	9.73	
1.07	0.26	0.35	0.45	0.55	0.65	0.71	0.81	0.90	
48	3.19	4.40	5.61	6.83	8.04	8.80	10.01	11.22	
1.22	0.30	0.41	0.52	0.63	0.75	0.82	0.93	1.04	
54	3.62	5.00	6.37	7.75	9.13	9.99	11.37	12.75	
1.37	0.34	0.46	0.59	0.72	0.85	0.93	1.06	1.18	
60	4.05	5.59	7.14	8.68	10.22	11.19	12.73	14.28	
1.52	0.38	0.52	0.66	0.81	0.95	1.04	1.18	1.33	
66	4.47	6.17	7.88	9.58	11.28	12.35	14.05	15.76	
1.68	0.42	0.57	0.73	0.89	1.05	1.15	1.31	1.46	
72	4.96	6.85	8.74	10.63	12.52	13.70	15.59	17.47	
1.83	0.46	0.64	0.81	0.99	1.16	1.27	1.45	1.62	
78	5.45	7.53	9.60	11.68	13.75	15.05	17.13	19.20	
1.98	0.51	0.70	0.89	1.08	1.28	1.40	1.59	1.78	
84	5.90	8.15	10.40	12.65	14.90	16.30	18.55	20.80	
2.13	0.55	0.76	0.97	1.18	1.38	1.51	1.72	1.93	
90	6.33	8.74	11.15	13.56	15.97	17.48	19.89	22.30	
2.29	0.59	0.81	1.04	1.26	1.48	1.62	1.85	2.07	
96	6.76	9.34	11.91	14.49	17.06	18.67	21.25	23.82	
2.44	0.63	0.87	1.11	1.35	1.59	1.73	1.97	2.21	
102	7.15	9.88	12.60	15.33	18.05	19.76	22.48	25.21	
2.59	0.66	0.92	1.17	1.42	1.68	1.84	2.09	2.34	
108	7.64	10.55	13.46	16.37	19.29	21.10	24.02	26.93	
2.74	0.71	0.98	1.25	1.52	1.79	1.96	2.23	2.50	
114	8.13	11.23	14.32	17.42	20.52	22.45	25.55	28.65	
2.90	0.76	1.04	1.33	1.62	1.91	2.09	2.37	2.66	
120	8.61	11.89	15.17	18.46	21.74	23.79	27.07	30.35	
3.05	0.80	1.10	1.41	1.71	2.02	2.21	2.51	2.82	
126	9.04	12.48	15.92	19.37	22.81	24.96	28.40	31.85	
3.20	0.84	1.16	1.48	1.80	2.12	2.32	2.64	2.96	
132	9.47	13.08	16.69	20.29	23.90	26.16	29.76	33.37	
3.35	0.88	1.22	1.55	1.89	2.22	2.43	2.77	3.10	
138	9.90	13.68	17.45	21.22	25.00	27.35	31.13	34.90	
3.51	0.92	1.27	1.62	1.97	2.32	2.54	2.89	3.24	
144	10.32	14.26	18.19	22.12	26.06	28.51	32.45	36.38	
3.66	0.96	1.32	1.69	2.06	2.42	2.65	3.01	3.38	
150	10.81	14.93	19.05	23.17	27.29	29.86	33.98	38.10	
3.81	1.00	1.39	1.77	2.15	2.53	2.77	3.16	3.54	
156	11.30	15.61	19.91	24.22	28.53	31.22	35.52	39.83	
3.96	1.05	1.45	1.85	2.25	2.65	2.90	3.30	3.70	
162	11.76	16.23	20.71	25.19	29.67	32.47	36.94	41.42	
4.11	1.09	1.51	1.92	2.34	2.76	3.02	3.43	3.85	
168	12.18	16.82	21.46	26.10	30.74	33.64	38.28	42.92	
4.27	1.13	1.56	1.99	2.42	2.86	3.13	3.56	3.99	
174	12.61	17.42	22.22	27.03	31.83	34.84	39.64	44.45	
4.42	1.17	1.62	2.06	2.51	2.96	3.24	3.68	4.13	
180	13.01	17.96	22.92	27.87	32.83	35.92	40.88	45.83	
4.57	1.21	1.67	2.13	2.59	3.05	3.34	3.80	4.26	
186	13.49	18.63	23.77	28.92	34.06	37.27	42.41	47.55	
4.72	1.25	1.73	2.21	2.69	3.16	3.46	3.94	4.42	
192	13.98	19.31	24.63	29.96	35.29	38.62	43.94	49.27	
4.88	1.30	1.79	2.29	2.78	3.28	3.59	4.08	4.58	
198	14.46	19.98	25.49	31.00	36.51	39.95	45.46	50.97	
5.03	1.34	1.86	2.37	2.88	3.39	3.71	4.22	4.74	

Upper Numerals English Units/Lower Numerals Metric Units