
NOTES: 1. ANGLES ONLY AVAILABLE BETWEEN 70° - 160°.

STANDARD ANGLE IS 135°

QTY. REQ'D	UNIT HEIGHT	ANGLE

CONCRETE (BY OTHERS)
STEEL STUD (BY OTHERS)
ANGLE G.W.B. (BY OTHERS)
R1/8" [R3.2mm] 2 1/2" [63.5mm]

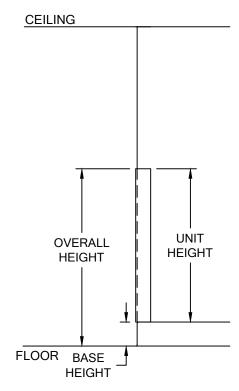

LG-250M CORNER GUARD AT PARTIAL HEIGHT ELEVATION

LG-250M

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART
		WALL	RETAINER	NUMBER
STEEL STUD/GYPSUM WALL WOOD STUD/GYPSUM WALL CONCRETE/CONC. BLOCK	LG 034 1 1/8" SCREW/NAIL LG 118/150/200/250 1" SCREW NAIL	N/A	N/A	90H136002 90H135002

NOTE: LG CORNER GUARDS THAT ARE REQUESTED WITHOUT PRE-DRILLED HOLES DO NOT INCLUDE FASTENERS WITH THE EXCEPTION OF MODEL LG-034. FOR MODEL LG-034, FASTENERS ARE ALWAYS SUPPLIED, AND HOLES ARE NOT PRE-DRILLED.



Hughesville, PA | 800.233.8493 | 570.546.5941 Mississauga, ON | 888.895.8955 | 905.274.3611 www.c-sgroup.com

© Copyright 2017 Construction Specialties, Inc.

PROJECT:	REVISION:
JOB NO.:	F&F:
CUSTOMER:	
REP:	DATE:
DRAWN BY:	SHEET NO:

DOC#: TS-930-229 ISSUE DATE: 11/13/00 REV DATE: 8/4/17