

Storm Resistant Louvres

When a wind-driven rain defense is required, our Storm Resistant Louvres are resistant to wind-driven rain and winds as high as 50 mph that drive 8" of water per hour.

Advantages

- Certified to be up to 99% effective under AMCA's wind driven rain test (model specific)
- Manages water penetration, even in intake applications
- Chevron style blades allow for long spanning and larger sections with mullions
- System is sightproof
- Hidden mullion options available for continuous line appearance without compromising water performance
- Modular capabilities (model specific) for inactive areas using blank-off

Applications

- Customisable for curtain wall applications
- Integration with CENTRIA Insulated metal panels

Finish Options



Solid Colour
Powder Coat



Pearlescent
& Metallic



Wood Grain
Patterns



Clear
Anodised



Custom
Colour

See all finish options online at c-sgroup.com.au.

Warranty

- 5-year material warranty
- 10-30 year finish warranty



Model RS-4700



View 3D Model →

Storm Resistant Louvres

Product Details





MODEL	LOUVRE DEPTH	BLADE SPACING	BLADE ORIENTATION
RS-4700	4" (101.6mm)	1¾" (44.5mm)	Horizontal
RSH-5700	5" (127.0mm)	2" (50.8mm)	
RS-7315	7" (177.8mm)	3⅞" (98.4mm)	
RS-7705	7" (177.8mm)	3⅞" (80.7mm)	
RS-5605	5" (127.0mm)	1" (25.4mm)	Vertical
RSV-5700	5" (127.0mm)	2" (50.8mm)	
RS-5900	5" (127.0mm)	1½" (38.1mm)	

Certifications/Testing*

- AMCA Certified

For model specific certifications, listing and testing - refer to the Performance Chart on our **Architectural Louvres Product Guide.*

Models

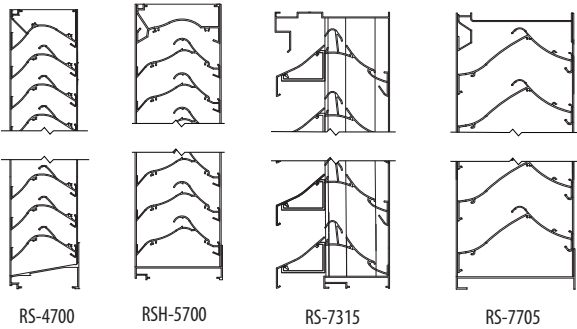

Learn More →