


GFT & GFTW

TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts.
- Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

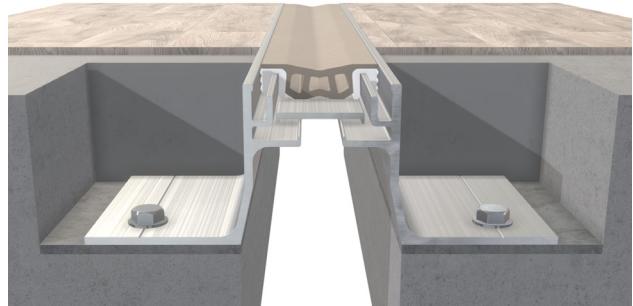

Primary Seal

- Dual Durometer 65 Shore A, 90 Shore A, ASTM D2240
- Available in 5 Standard colors


Frame Heights

- 1", 1.5", 2", 2.5" & 3" for 1" models
- 1", 1.5", 2" & 3" for 2" models


Standard Loading

- 500 lbs.


Model	Joint Width	Min. Opening	Max. Opening	Exposed Surface	Blockout Width	Blockout Height
GFT-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.25" (32mm)	2.50" (64mm)	VARIES
GFT-200	2.00" (51mm)	1.50" (38mm)	2.50" (64mm)	1.88" (48mm)	2.50" (64mm)	VARIES
GFTW-100	1.00" (25mm)	0.75" (19mm)	1.25" (32mm)	1.13" (29mm)	2.50" (64mm)	VARIES
GFTW-200	2.00" (51mm)	1.50" (38mm)	2.50" (64mm)	1.93" (49mm)	2.50" (64mm)	VARIES

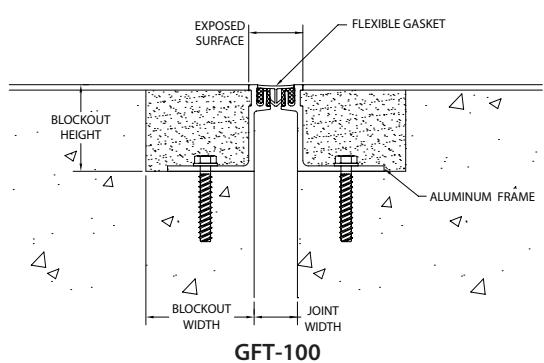


GFT-100

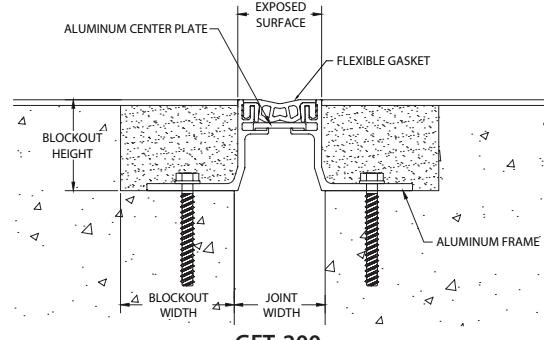

GFT-200

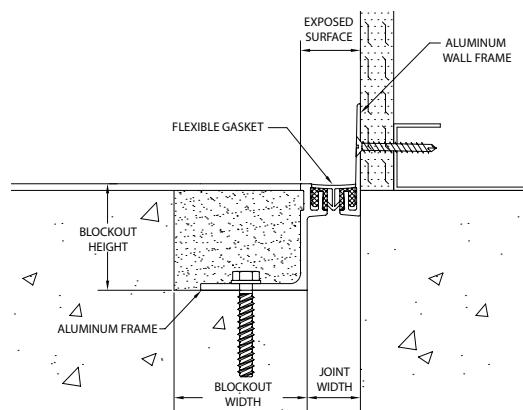

GFTW-100

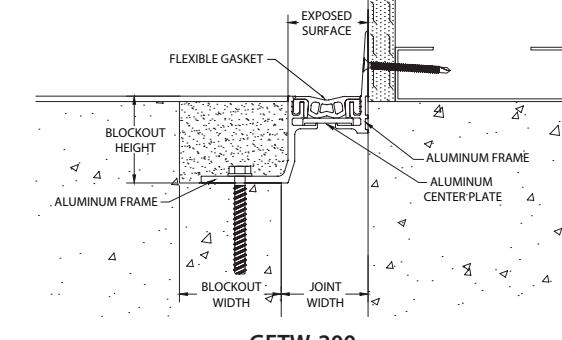

GFTW-200



Construction Specialties®

Questions? Connect with a CS Representative.
c-sgroup.com/representative-locator

c-sgroup.com | 800.233.8493
 ©2026 Construction Specialties, Inc.