CONTRACTOR NOTES:

- 1. ALL DIMENSIONS MUST BE FIELD VERIFIED TO A 1/16" TOLERANCE
- DIMENSIONS TO BE OBTAINED AT THE ELEVATION OF MATERIAL LOCATION. ALSO, MOUNTING CONDITION TO BE VERIFIED. FABRICATION CANNOT BEGIN WITHOUT THIS INFO.
- 3. SOME DIMENSIONS SMALLER THAN 16" MAY BE TOO SMALL TO FABRICATE.


NOTES:

- ALL RAIL TO BE SUPPLIED PREFABRICATED TO REQUIRED LENGTH.
 ALL CORNERS AND END CAPS TO BE FACTORY FORMED TO SUIT FIELD
 CONDITIONS.
- ALL UNITS TO BE PRE-DRILLED FOR ATTACH. HOLE SPACING TO BE DETERMINED BY UNIT LENGTH, SPACING NOT TO EXCEED 32" ON CENTER.
- 3. ALL MOUNTING HARDWARE TO BE SUPPLIED FOR FIELD ASSEMBLY AND INSTALLATION.
- 4. MATERIAI


CS ECR-32S CRASH RAIL SHALL BE MANUFACTURED FROM A 4" WIDE x 1/4" THICK EXTRUSION (#304 STAINLESS STEEL). DESIGNED FRO ELASTIC DEFORMATION UNDER IMPACT WITHOUT DAMAGING THE WALL TO WHICH IT HAS BEEN MOUNTED.

5. FINISH:

THE ECR-32S CRASH RAIL SHALL BE FURNISHED WITH A 120 GRIT MECHANICAL #4 SATIN FINISH.

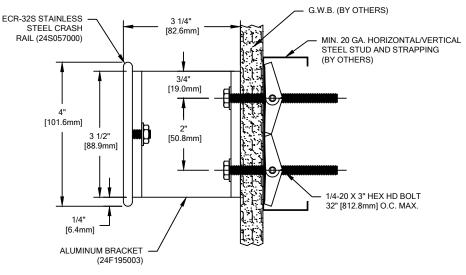





WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART	
		WALL	RETAINER	NUMBER	
STEEL STUD/GYPSUM WALL	1/4-20 X 3" HEX HEAD BOLT 1/4-20 X 2" TOGGLER 1/4" LOCK WASHER	3/4"	N/A	90H281004 90H019004 90H009003	
CONCRETE/CONCRETE BLOCK	1/4-20 X 1 1/2" HEAD HEAD BOLT 1/4" LOCK WASHER 1/4-20 X 1 1/4" 4-WAY LEAD SHIELD	1/2"	N/A	90H863002 90H009003 90H020004	
WOOD STUD/GYPSUM WALL	1/4" X 3" HEX HEAD LAG SCREW 1/4" LOCK WASHER	3/16"	N/A	90H967002 90H009003	



Hughesville, PA | 1800.233.8493 | 570.546.5941 Mississauga, ON | 1888.895.8955 | 905.274.3611 www.c-sgroup.com

© Copyright 2017 Construction Specialties, Inc.

PROJECT:	REVISION:
JOB NO.:	F&F:
CUSTOMER:	
REP:	DATE:
DRAWN BY:	SHEET NO:

DOC#: TS-930-412 ISSUE DATE: 10/10/04 REV DATE: 5/15/24