

Extreme Weather Louvers


Extreme Weather Louvers provide the industry's highest level of protection and certification to withstand large and small projectile impacts and high-velocity wind pressures. The product range at the pinnacle of extreme weather and air flow conditions are best used in coastal areas in hurricane-prone regions.

Advantages

- Designed, tested, and certified for coastal and extreme weather applications (i.e. hurricane and tornado)
- Superior protection for high velocity wind driven rain and impact resistance
- Pre-engineered with structural calculations available, including substrate and mounting conditions

Applications

- Regional susceptibility to tropical storm force winds, hurricanes, and tornadoes
- Customizable with metal panel and curtain wall applications

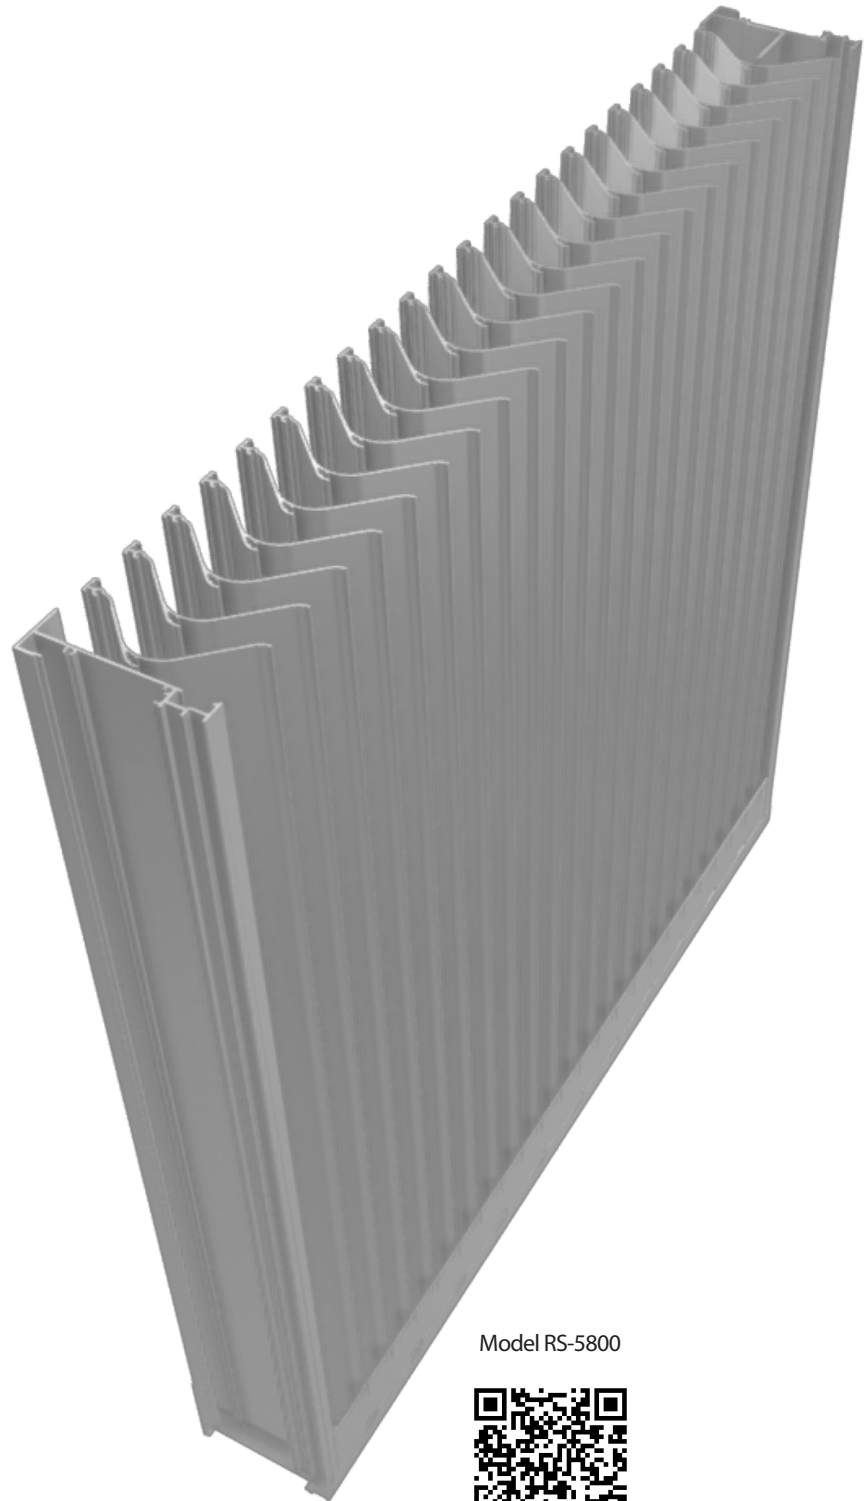

Model RS-5800



[View 3D Model](#) →

Extreme Weather Louvers

Finish Options




See all finish options online at c-sgroup.com.

Product Details

MODEL	LOUVER DEPTH	BLADE SPACING	BLADE ORIENTATION
DC-4174	4" (101.6mm)	3¼" (82.6mm)	Horizontal
DCH-5704	5" (127.0mm)	2" (50.8mm)	
EW-5210	5" (127.0mm)	2" (50.8mm)	
RS-5215/ RS-5216	5¾" (136.5mm)	2½" (44.5mm)	
RS-5225/ RS-5226	5¾" (136.5mm)	2½" (38.1mm)	
DC-6174	6" (152.4mm)	5¾" (146.1mm)	
DC-9614	9" (228.6mm)	4" (101.6mm)	
RS-9615	9" (228.6mm)	4" (101.6mm)	Vertical
RS-3700	3¼" (82.5mm)	7/8" (22.2mm)	
DCV-5704	5" (127.0mm)	2" (50.8mm)	
RS-5800	5" (127.0mm)	1½" (38.1mm)	
DC-5804	5" (127.0mm)	1½" (38.1mm)	
DCPL-3704	5¾" (136.5mm)	7/8" (22.2mm)	

Models

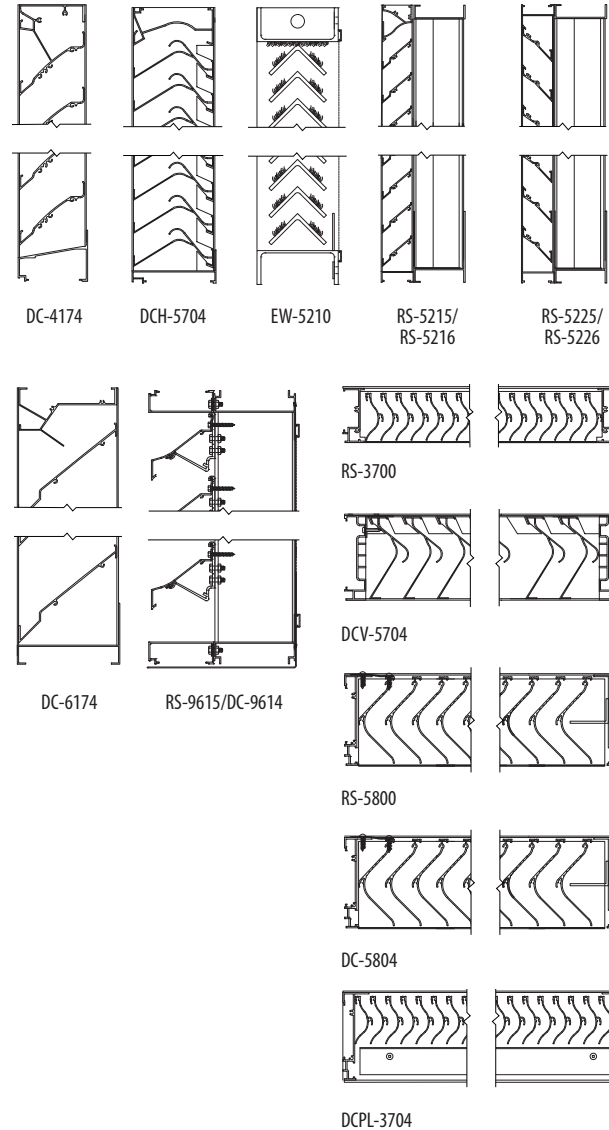

Certifications/Testing*

- AMCA Certified
- AMCA Listed
- Dade County Certified.
- Florida Product Approved
- Texas Department of Insurance
- ICC 500, the testing to ASTM E330 and guidance of FEMA 361

*For model specific certifications, listing and testing - refer to the Performance Chart on our [Architectural Louvers Product Guide](#).

Warranty

- 1-year Material Warranty
- 20-year Finish Warranty (excludes anodized)
- 10-year Finish Warranty Wood Grain



Learn More →