STORM RESISTANT LOUVER MODEL RS-4600

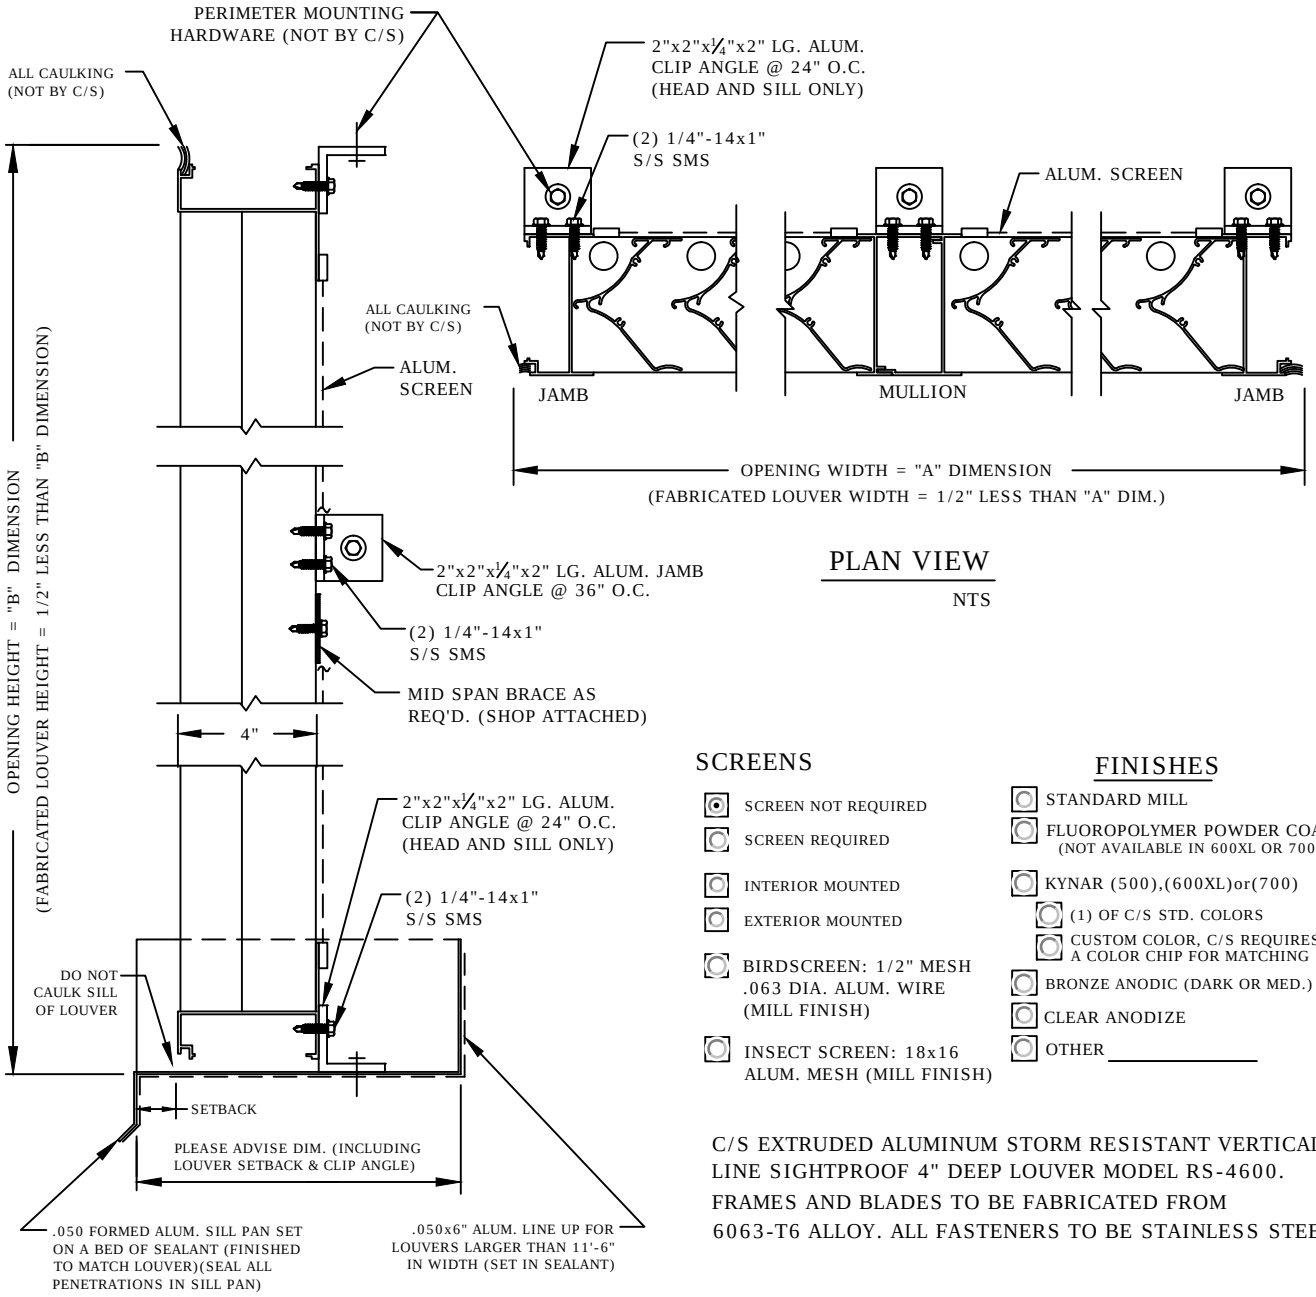

PLAN VIEW

NTS

SCREENS

- (●) SCREEN NOT REQUIRED
- ( ) SCREEN REQUIRED
- ( ) INTERIOR MOUNTED
- ( ) EXTERIOR MOUNTED
- ( ) BIRDSCREEN: 1/2" MESH .063 DIA. ALUM. WIRE (MILL FINISH)
- ( ) INSECT SCREEN: 18x16 ALUM. MESH (MILL FINISH)

FINISHES

- ( ) STANDARD MILL
- ( ) FLUOROPOLYMER POWDER COAT (NOT AVAILABLE IN 600XL OR 700)
- ( ) KYNAR (500),(600XL)or(700)
  - ( ) (1) OF C/S STD. COLORS
  - ( ) CUSTOM COLOR, C/S REQUIRES A COLOR CHIP FOR MATCHING
- ( ) BRONZE ANODIC (DARK OR MED.)
- ( ) CLEAR ANODIZE
- ( ) OTHER _____

C/S EXTRUDED ALUMINUM STORM RESISTANT VERTICAL LINE SIGHTPROOF 4" DEEP LOUVER MODEL RS-4600. FRAMES AND BLADES TO BE FABRICATED FROM 6063-T6 ALLOY. ALL FASTENERS TO BE STAINLESS STEEL.

VERTICAL SECTION (NTS)

UNSUPPORTED BLADE LENGTH = @ PSF.

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	LOUVER LOCATION	REMARKS
						CKD. BY:

Construction Specialties, Inc.
49 Meeker Avenue
Cranford, New Jersey 07016
(908) 272-5200
Fax (908) 272-6038

PROJECT:	DRAWN BY:
CUSTOMER:	DATE:
ARCH'T:	DWG. NO:
AGENT:	SHEET OF