

SSR & SSRW 200-400

TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

Turnbar


- Injection Molded, Glass Reinforced Plastic

Standard Loading

- 500 lbs.

Center Pan

- 1" depth

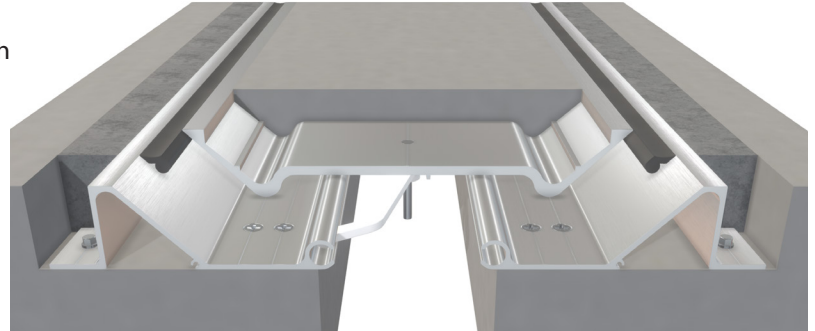

Capable of Lateral Movement

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
SSR-200	2.00" (51mm)	0.75" (19mm)	6.50" (165mm)	13.69" (348mm)	7.25" (184mm)	2.00" (51mm)
SSR-300	3.00" (76mm)	0.75" (19mm)	7.50" (191mm)	13.69" (348mm)	6.75" (171mm)	2.00" (51mm)
SSR-400	4.00" (102mm)	1.50" (38mm)	8.50" (216mm)	13.69" (348mm)	6.25" (159mm)	2.00" (51mm)
SSRW-200	2.00" (51mm)	1.00" (25mm)	4.00" (102mm)	7.88" (200mm)	7.25" (184mm)	2.00" (51mm)
SSRW-300	3.00" (76mm)	1.25" (32mm)	5.00" (127mm)	8.38" (213mm)	6.75" (171mm)	2.00" (51mm)
SSRW-400	4.00" (102mm)	1.75" (44mm)	6.00" (152mm)	8.88" (226mm)	6.25" (159mm)	2.00" (51mm)

