




PEDITRED LP WITH SURFACE MOUNTED TAPERED ALUMINUM FRAME

INSERT STYLE: INSERT COLOR: PLEASE ADVISE CATALOG NUMBER: G3 PART NUMBER:

| | | | |
|-----|-------------|------|----|
| NO. | REVISION | DATE | BY |
| NO. | F&F RELEASE | DATE | BY |
| | | | |
| | | | |

- | | | | | | | |
|--|--|---|---|--|---|---|
|  RECYCLED RUBBER G3RR 19R005XXX |  EXTERIOR CARPET G3EC 19C018XXX |  HEAVY-DUTY CARPET G3HC 19C010XXX 19C022XXX |  RUBBER G3V 19V022501 #8501 BLACK |  VINYL ABRASIVE G3VA 19A007XXX 19M001XXX |  SERRATED ALUM. INSERT G3SAI 19A004001 |  POURED ABRASIVE INSERT G3PA 19A005XXX |
|--|--|---|---|--|---|---|

PEDITRED INSERT STYLES

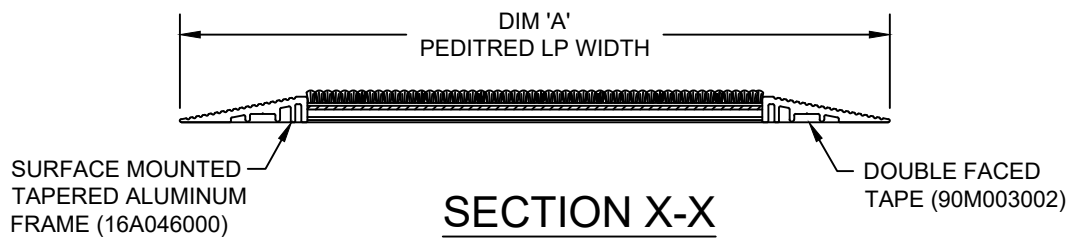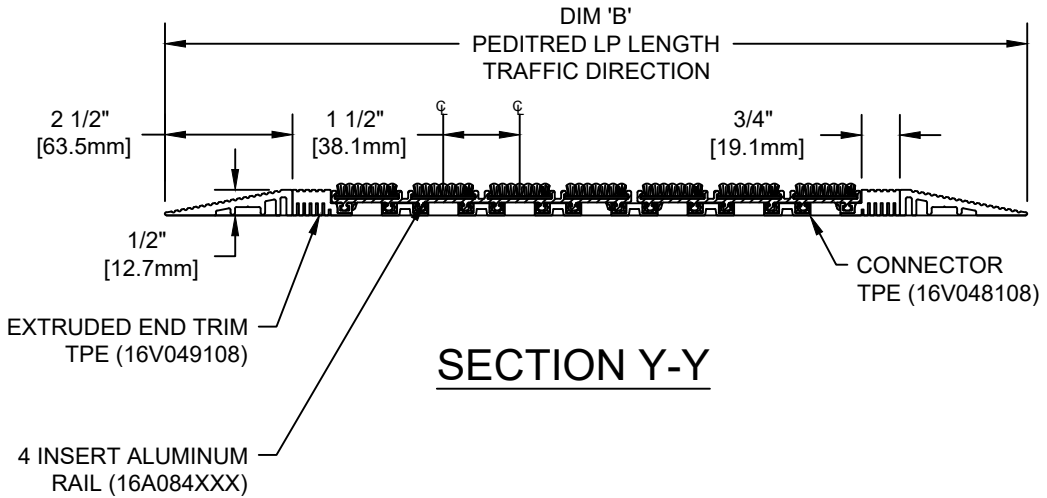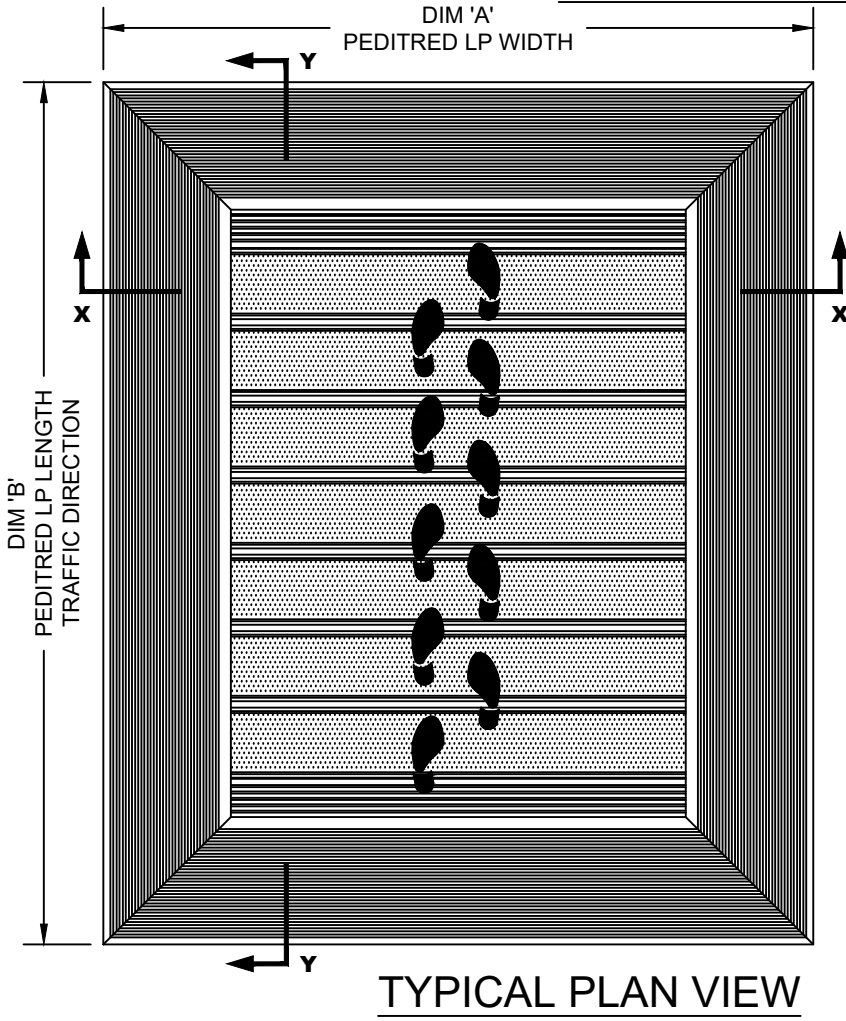

NOTES:

- *PLEASE VERIFY TRAFFIC DIRECTION
- *PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.
- *MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 3'-0" (.91M) IN LENGTH (DIM "B").
- *ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

CS Construction Specialties™
 8696 Route 405 Highway, Muncy PA 17756
 (800) 233-8493 • Fax: (570) 546-4692 • www.c-sgroup.com

| PLEASE VERIFY ALL | QTY | MARK # | LOCATION | MODEL | DIM 'A' WIDTH | DIM 'B' LENGTH | FINISH | NOTES |
|-------------------|-----|--------|----------|-------|---------------|----------------|--------|-------|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

| | | |
|-------------|-------|----------|
| PROJECT: | | |
| LOCATION: | | |
| CONTRACTOR: | | |
| AGENT: | | SHT: |
| DRG. BY: | DATE: | JOB NO.: |