


## XLP Series

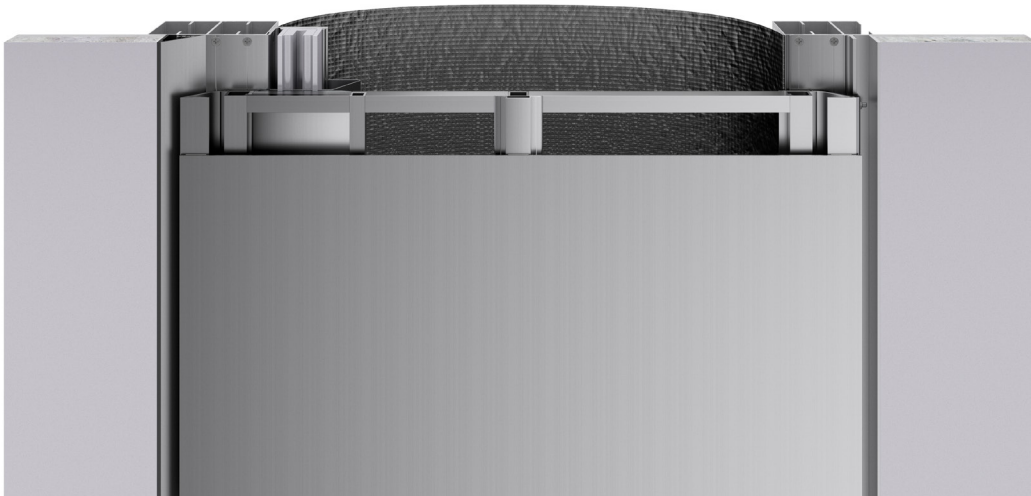

Model XLP

This metal facade cover system is designed for large seismic or base isolated applications where concealment is desired, where high wind loads are expected, or where lateral shear is required. This system has a structural ladder frame assembly utilizing two heavy-duty magnetic closures and a pulley system that returns the cover to nominal position after a seismic event. The standard aluminum infill panel can be color matched to blend with adjacent finishes.

### Advantages

- Suitable for seismic or base isolated applications
- For seismic joints ranging from 25" to 34" (635mm to 863.6mm)
- Accommodates high wind loads, lateral shear, and seismic movement
- Safety cables prevent damage to surrounding finishes during a seismic event
- Magnet and pulley system return cover to nominal position after a seismic event
- Standard aluminum infill panel can be painted to match surrounding finishes
- Can be supplied in custom heights and widths to match building aesthetics
- Vapor barrier included

# XLP Series

## Product Details

- Joint sizes range from 25" - 34" (635mm to 863.6mm)
- 10' (304.8cm) stock lengths
- Meets ASTM E1399




Vapor Barrier




Fire Barrier

## Model Details



Wall to Wall



Corner Wall

MODEL	WALL TO WALL	CORNER WALL (C)
XLP	●	
XLPC		●

## Standard Finish



Clear Anodize

*Premium finishes are available in Kynar and Powder Coat options. See all finish options online at [c-sgroup.com](http://c-sgroup.com).*

Aluminum in contact with concrete/masonry will have a 2 mil heavy metal free high solids primer

## Warranty

- Standard Five-Year Warranty



Learn More →