


HFR Series

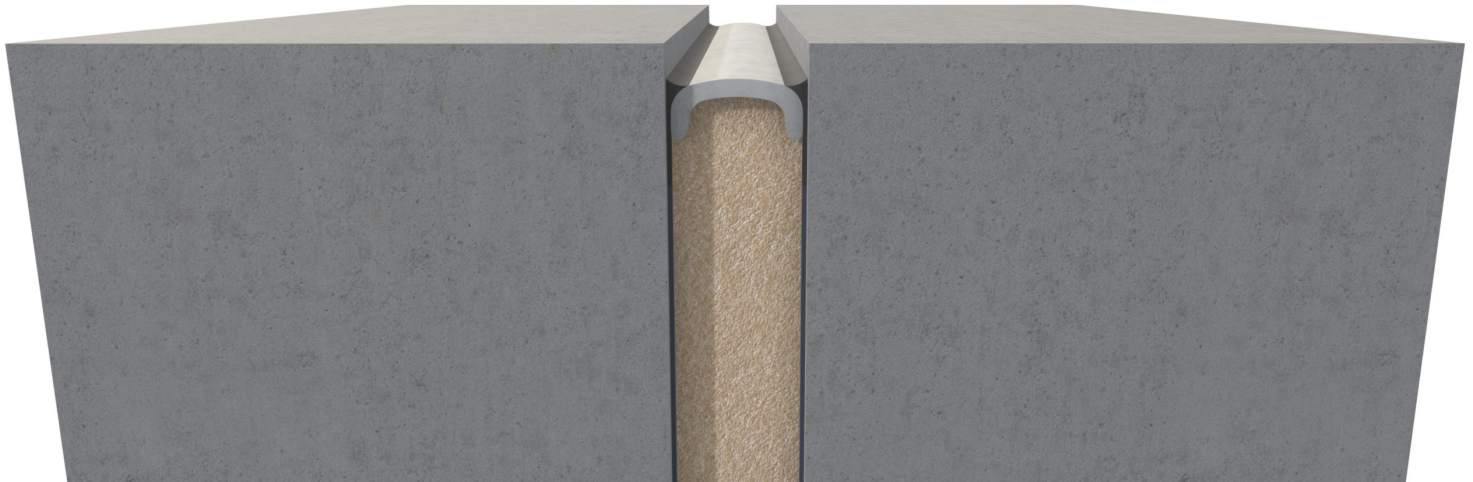

Model HFR

This pre-compressed impregnated foam cover is fire rated, watertight, and sound suppressing. It is ideal for parking garages, retrofit joints, plaza decks, stadium applications, or anywhere a fire rated and watertight seal is required. Available in 2 or 3-hour fire rating.

Advantages

- Available in 2 or 3 hour fire rating
- Ideal for horizontal applications where a watertight seal is required
- Pre-compressed, fire retardant impregnated foam
- Sound suppressing




View 3D Model →

HFR Series

Product Details

- Joint sizes range from 1" to 4" (25.4mm to 101.6mm)
- 6' 6" (198.12 cm) stock lengths
- Available in 2 or 3-hour fire rating
 - 2HFR pre-coated with traffic silicone coating
 - 3HFR has silicone upper layer & intumescent bottom layer

Model Details



Colour



Deck Gray

Certifications

Has been tested and certified under UL 2079. Meets the requirements of ASTM E1966, ASTM E119 and ASTM E1399.

Warranty

- Standard Five-year Warranty

Listing Chart

RATING	NOMINAL JOINT SIZE	APPLICATION	COMPRESSION	EXTENSION	HFR LISTING NUMBER
2HR	1/2" - 2"	Floor to Floor	50%	50%	FF-D-0135
		Floor to Wall	50%	50%	FW-D-0086
	2-1/4" - 4"	Floor to Floor	50%	50%	FF-D-1189
		Floor to Wall	50%	50%	FW-D-1119
3HR	1/2" - 2"	Floor to Floor	25%	25%	FF-D-0136
		Floor to Wall	25%	25%	FW-D-0087
	2-1/4" - 4"	Floor to Floor	25%	25%	FF-D-1190
		Floor to Wall	25%	25%	FW-D-1120



Learn More

