

SJPF-S & SJPFW-S Series

Technical Data:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221
- Sheet – 6061-T6, 3003-H14, 5005-H34, ASTM B209

Stainless Steel

- Type 304 ASTM A167, A240A, A240M

Turnbar

- Material – C1075 Blue Temper Spring Steel
- Hardness - RC 44-47
- Finish - "A" Coating (Corrosion Protection)


Standard Loading

- 500 lbs.




Capable of Lateral Movement

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
SJPF-100S/B	1.00" (25mm)	0.38" (10mm)	3.00" (76mm)	5.50" (140mm)	3.50" (89mm)	1.13" (29mm)
SJPF-200S/B	2.00" (51mm)	1.00" (25mm)	4.00" (102mm)	5.50" (140mm)	3.00" (76mm)	1.13" (29mm)
SJPF-300S/B	3.00" (76mm)	1.00" (25mm)	4.63" (118mm)	6.50" (165mm)	3.00" (76mm)	1.13" (29mm)
SJPF-400S/B	4.00" (102mm)	1.00" (25mm)	6.50" (165mm)	8.00" (203mm)	3.00" (76mm)	1.13" (29mm)
SJPF-500S/B	5.00" (127mm)	1.00" (25mm)	7.50" (191mm)	10.00" (254mm)	3.00" (76mm)	1.13" (29mm)
SJPF-600S/B	6.00" (152mm)	1.00" (25mm)	9.88" (251mm)	11.50" (292mm)	3.00" (76mm)	1.13" (29mm)
SJPFW-100S/B	1.00" (25mm)	0.00" (0mm)	2.00" (51mm)	3.25" (83mm)	3.38" (86mm)	1.13" (29mm)
SJPFW-200S/B	2.00" (51mm)	0.00" (0mm)	3.00" (76mm)	3.75" (95mm)	3.00" (76mm)	1.13" (29mm)
SJPFW-300S/B	3.00" (76mm)	0.00" (0mm)	3.81" (97mm)	4.75" (121mm)	3.00" (76mm)	1.13" (29mm)
SJPFW-400S/B	4.00" (102mm)	0.00" (0mm)	5.25" (133mm)	6.00" (152mm)	3.00" (76mm)	1.13" (29mm)
SJPFW-500S/B	5.00" (127mm)	0.00" (0mm)	6.25" (159mm)	7.50" (191mm)	3.00" (76mm)	1.13" (29mm)
SJPFW-600S/B	6.00" (152mm)	0.00" (0mm)	7.94" (202mm)	8.75" (222mm)	3.00" (76mm)	1.13" (29mm)

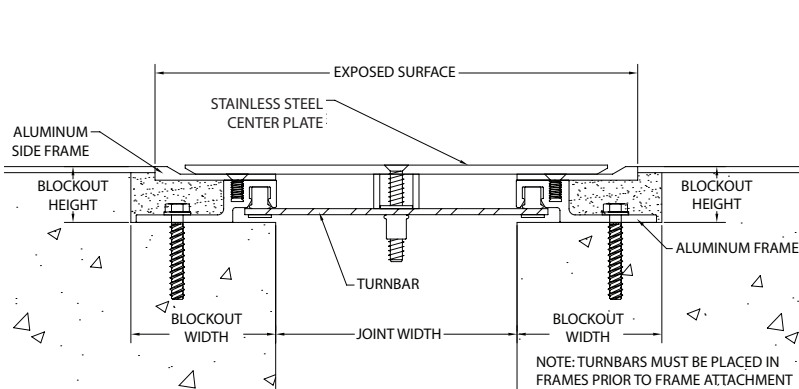

SJPF-S

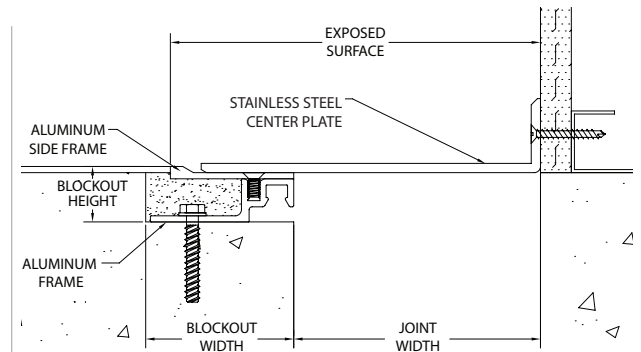

SJPFW-S