


Rubstrips

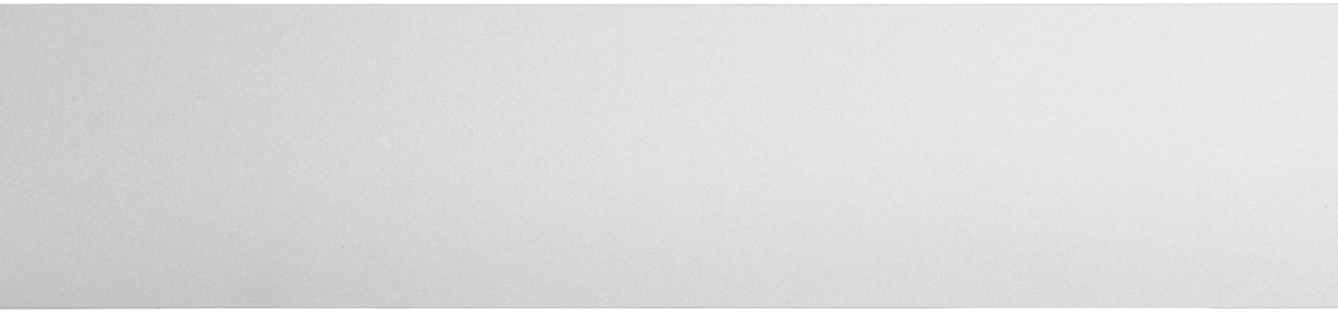

Model Acrovyn® Rubstrip

Resilient Rubstrips are an economical option for areas prone to constant scuffing. They provide protection against damage from chairs, gurneys and other abuse.

Advantages

- Available in Acrovyn®, stainless steel, or clear polycarbonate
- Available in multiple thicknesses
- Top & bottom beveled finished edges
- Quick installation
- Can be installed after market
- Can be used as an accent strip & placed at any height

Applications

- Corridors
- Waiting areas
- Offices
- Equipment storage areas

Building Segments

- Aviation & Transportation
- Education
- Healthcare
- Hospitality
- Office & Mixed Use
- Retail
- Senior Living
- Sports & Entertainment

[Learn More](#)

Rubstrips

Product Details


- PVC-free Acrovyn
- Up to 50% post-consumer recycled content
- Suede texture in .040" (1.02mm) or .060" (1.52mm) rigid sheet
- Material cut to specified height 4-24" (101.6 - 609.6mm)
- Supplied in 10' (3.0m) lengths
- Adhesive or mechanically fastened
- Factory- or field-formed radius
- 16-gauge (1.5mm) Type 304 stainless steel alloy with #4 satin finish
- 90- & odd-degree inside and outside corners available (excluding RS-SS)

Certifications/Testing

- Resistant to certain bacterial & fungal growth (per ASTM G 22-76 & G 21-96)
- Chemical resistant (per ASTM D 543)
- Abrasion resistant (per ASTM D 4060-07)
- ASTM E84 Class A/1 (Model RS-SS only)
- Impact resistant (per ASTM F 476-84)
- Acrovyn 4000 Group No. 1 NCC 2022 (Amendment 2) - C2D11
- UL class A/1 fire rated & labeled (Models RS-40 & 60 adhesive mount only)
- Low VOC Emissions Certificate – Intertek Clean Air Gold (CDPH 01350 v1.2)



Acrovyn Finish Options



See all finish options online at c-sgroup.com.au.

Warranty

- Acrovyn Limited Lifetime Warranty

Model Details

MODEL	PROFILE	THICKNESS
RS-40	Acrovyn	.040" (1.02mm)
RS-60	Acrovyn	.060" (1.52mm)
RS-LX	Clear polycarbonate	.060" (1.52mm)
RS-SS	Stainless steel	.0625" (1.59mm)