

Model 2252
2 1/4" (57.2 mm) Deep Fixed Thinline A Frame Louver

Material:


Material:	6063-T6 Alloy
Nominal Thickness (heads, sills, jambs, & mullions):	0.064" (1.63 mm)
Nominal Blade Thickness:	0.064" (1.63 mm)
Furnished With:	Birdscreen: 1/2" (12.7mm) intercrimp aluminum mesh, 0.063" (1.60 mm) diameter wire removeable aluminum bird screen in an aluminum frame
Additional Options (at additional cost):	Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Integrated glazing frames




Test Summary:
For a 4 Foot by 4 Foot Unit.

Tested with mill finish and no screen

- Free area = 5.54 ft² (0.52 m²)
- Percent free area = 34.6%
- Maximum recommended air intake velocity = 700 FPM (3.56 m/s)
- Intake pressure drop at 700 FPM free area velocity = 0.075 in H₂O (18.6 Pa)




SECTION VIEW



PLAN VIEW

Model 2252

2 1/4" (57.2 mm) Deep Fixed Thinline A Frame Louver

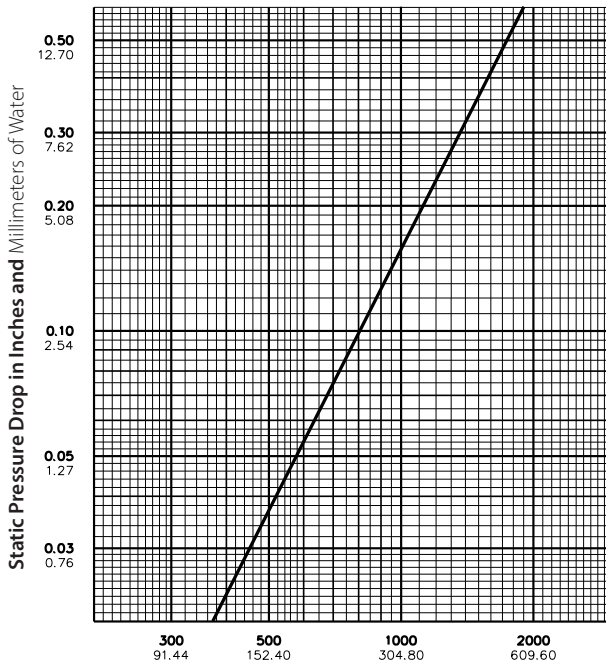

Air Velocity in Feet and Meters per Minute Through Free Area

Data corrected to standard air density.
48" x 48" (121.92cm x 121.92cm) louver tested to figure 5.5.

Free Area Table (Free area in sq. feet and sq. meters)

For additional sizes, please visit:

<https://www.c-sgroup.com/architectural-louvers/louvers-airflow-tool>

		Width in Inches and Meters							
		18	24	30	36	42	48	54	60
Height in Inches and Meters	18	0.62	0.85	1.07	1.30	1.53	1.72	1.95	2.17
	0.46	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.20
	24	0.89	1.22	1.55	1.88	2.21	2.48	2.81	3.14
	0.61	0.08	0.11	0.14	0.17	0.21	0.23	0.26	0.29
	30	1.17	1.60	2.03	2.46	2.89	3.25	3.68	4.11
	0.76	0.11	0.15	0.19	0.23	0.27	0.30	0.34	0.38
	36	1.44	1.97	2.51	3.04	3.57	4.01	4.55	5.08
	0.91	0.13	0.18	0.23	0.28	0.33	0.37	0.42	0.47
	42	1.72	2.35	2.98	3.62	4.25	4.78	5.41	6.05
	1.07	0.16	0.22	0.28	0.34	0.39	0.44	0.50	0.56
	48	1.99	2.73	3.46	4.20	4.93	5.54	6.28	7.01
	1.22	0.18	0.25	0.32	0.39	0.46	0.52	0.58	0.65
	54	2.27	3.10	3.94	4.78	5.61	6.31	7.15	7.98
	1.37	0.21	0.29	0.37	0.44	0.52	0.59	0.66	0.74
	60	2.54	3.48	4.42	5.35	6.29	7.07	8.01	8.95
	1.52	0.24	0.32	0.41	0.50	0.58	0.66	0.74	0.83
	66	2.82	3.85	4.89	5.93	6.97	7.84	8.88	9.92
	1.68	0.26	0.36	0.45	0.55	0.65	0.73	0.82	0.92
	72	3.09	4.23	5.37	6.51	7.65	8.60	9.75	10.89
	1.83	0.29	0.39	0.50	0.61	0.71	0.80	0.91	1.01
78	3.36	4.61	5.85	7.09	8.33	9.37	10.61	11.85	
1.98	0.31	0.43	0.54	0.66	0.77	0.87	0.99	1.10	
84	3.64	4.98	6.33	7.67	9.01	10.13	11.48	12.82	
2.13	0.34	0.46	0.59	0.71	0.84	0.94	1.07	1.19	
90	3.91	5.36	6.80	8.25	9.69	10.90	12.34	13.79	
2.29	0.36	0.50	0.63	0.77	0.90	1.01	1.15	1.28	
96	4.19	5.74	7.28	8.83	10.38	11.66	13.21	14.76	
2.44	0.39	0.53	0.68	0.82	0.96	1.08	1.23	1.37	

Upper Numerals English Units/Lower Numerals Metric Units