

FLOORMATIONS ODYSSEY 3/4" DEPTH RECESS MOUNT


PATTERN: ODYSSEY

INSERT COLOR: N/A

CATALOG NUMBER:

PART NUMBER:


|     |              |            |     |
|-----|--------------|------------|-----|
| NO. | REVISION     | DATE       | BY  |
| 1   | REVISION # 1 | 08/13/2015 | JDM |
| NO. | F&F RELEASE  | DATE       | BY  |
|     |              |            |     |

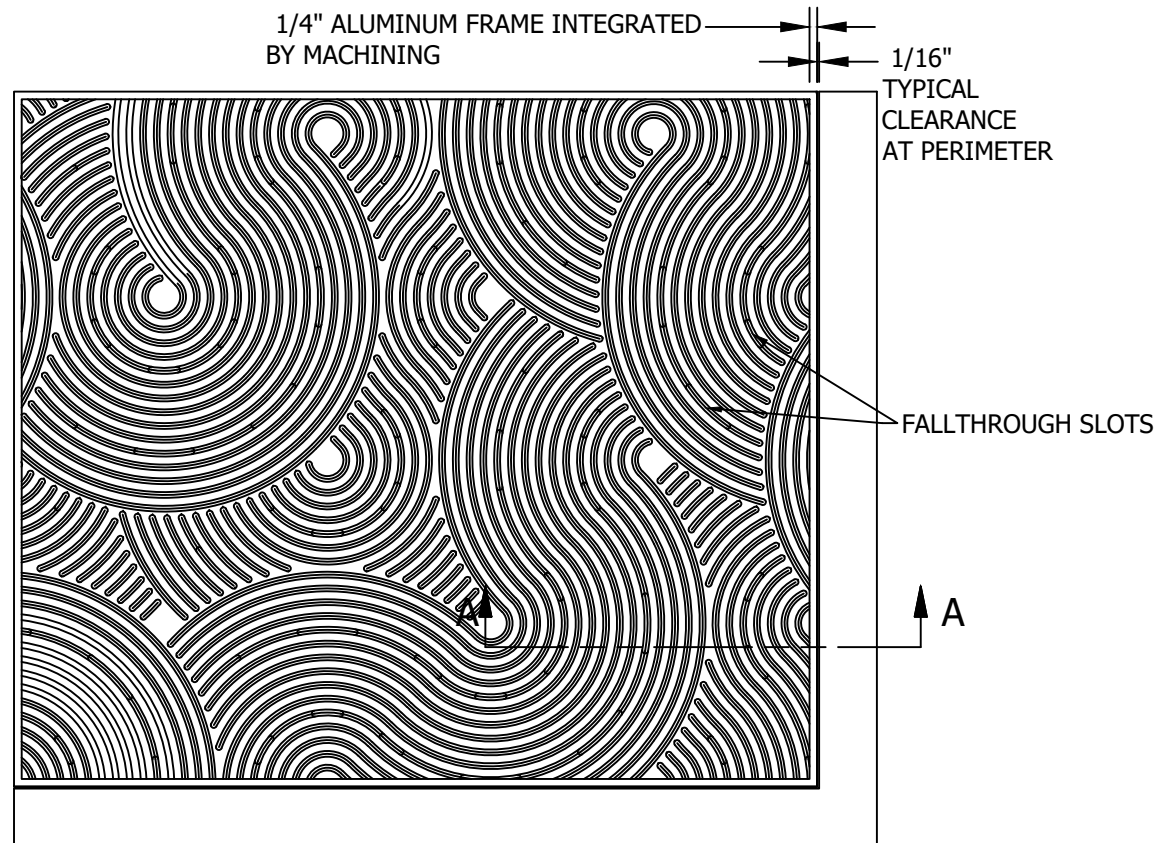

PLAN VIEW  
SCALE 1:5

NOTES:

- 5052 Aluminum plate with clear anodized finish attached to 6105 Aluminum supports with 3M Dual Lock.
- Max module size 34" x 119"
- Splice sections will be butt joints to minimize pattern disruption.
- Drafting to determine best layout/sections required.
- Static Coefficient of Friction .5 per ASTM D-2047
- 300 lb. per wheel rolling load
- Max deflection of .022" under 300 PSI load.

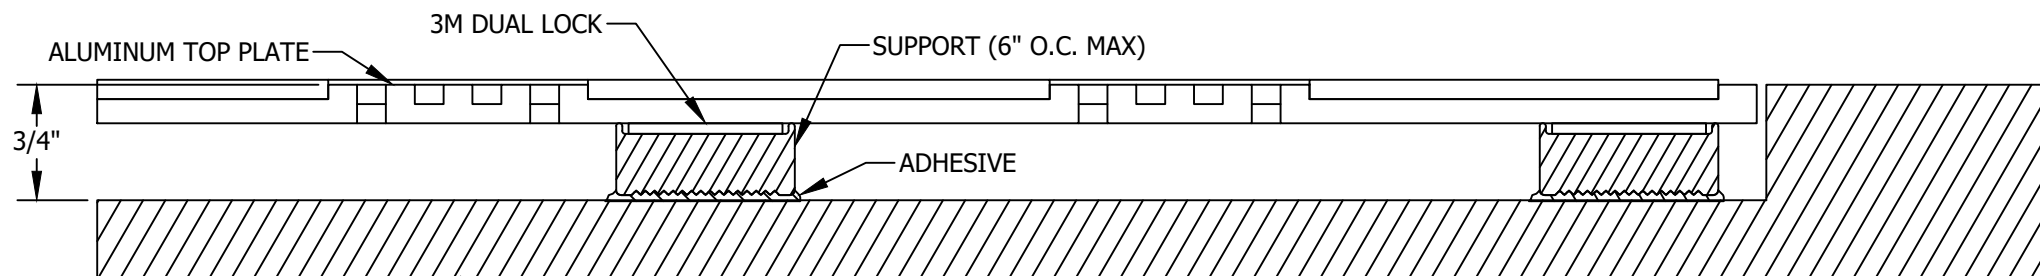

SECTION A-A  
SCALE 1:1



| PLEASE VERIFY ALL | QTY | MARK # | LOCATION | MODEL | DIM 'A'<br>WIDTH | DIM 'B'<br>LENGTH | FINISH | REMARKS |
|-------------------|-----|--------|----------|-------|------------------|-------------------|--------|---------|
|                   |     |        |          |       |                  |                   |        |         |
|                   |     |        |          |       |                  |                   |        |         |
|                   |     |        |          |       |                  |                   |        |         |
|                   |     |        |          |       |                  |                   |        |         |

|             |       |                  |
|-------------|-------|------------------|
| PROJECT:    |       |                  |
| LOCATION:   |       |                  |
| CONTRACTOR: |       |                  |
| DRG. BY:    | DATE: | SHT:<br>JOB NO.: |