PEDITRED SA WITH RECESSED LEVEL BASE FRAME AND RADIUS EDGE FRAME


INSERT STYLE: PEDITRED SA	INSERT COLOR: N/A	CATALOG NUMBER: G4	PART NUMBER:

NO.	REVISION	DATE	BY


NO.	F&F RELEASE	DATE	BY




PEDITRED SA
SERRATED ALUMINUM
G7
16A078001

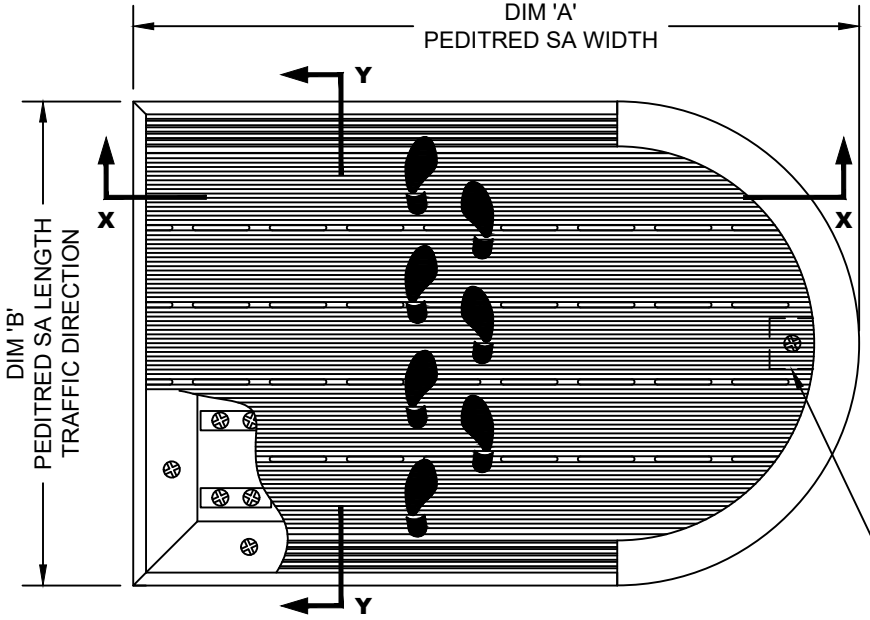

TYPICAL PLAN VIEW

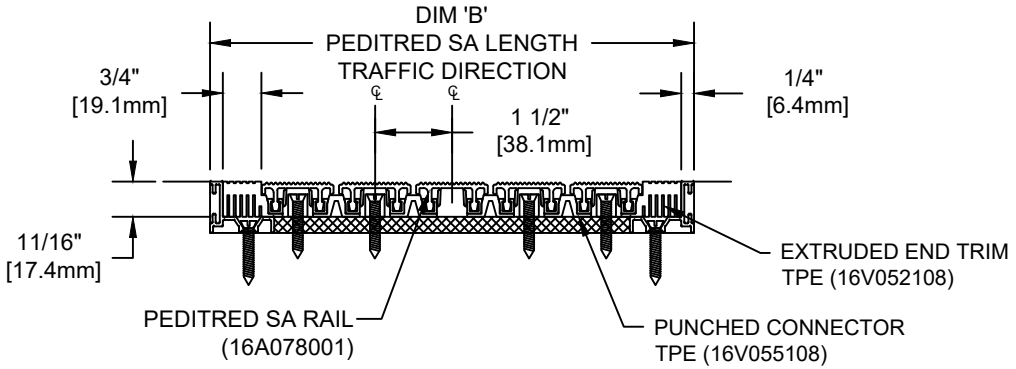

SECTION Y-Y

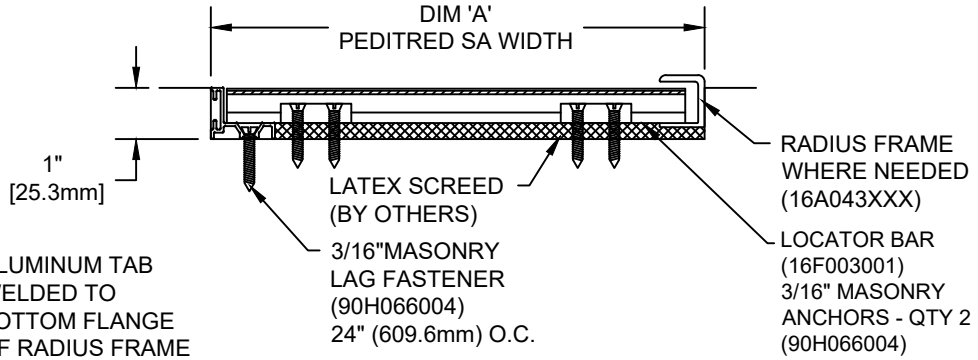

SECTION X-X

ALUMINUM TAB
WELDED TO
BOTTOM FLANGE
OF RADIUS FRAME
FOR MASONRY LAG
FASTENER
(90H066004)
24" (609.6mm) O.C.

NOTES:

*PEDITRED SA SHALL BE ABLE TO SUPPORT A 1000 LB. ROLLING LOAD.

*PLEASE VERIFY TRAFFIC DIRECTION

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 3'-0" [.91M] IN LENGTH (DIM "B").

*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

Construction Specialties™
6696 Route 405 Highway, Muncy PA 17756
(800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com

PLEASE VERIFY ALL

QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: